



XGB

Programmable Logic Controller

Programmable Logic Controller


XGB



All-In-One PLC With Next Generation Technology

XGB is a micro PLC that offers maximum performance at minimum cost. With its high functionality, XGB supports from simple control system to complex task. Strengthening its communication functions, XGB offers user-oriented integrated control. Based on its strengths, XGB can be used in many application fields.



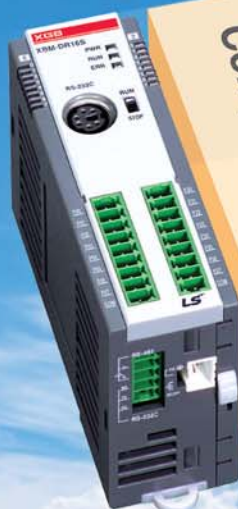

Functionality
Convenience
High Performance
Compactness
ALL-IN-ONE PLC



Contents

• Features	4
• General specifications	6
• Performance specifications	8
• Input / Output specification	12
• Wiring	17
• Built-in functions	29
• Expansion	36
• Transistor Output	37
• Relay Output	38
• DC Input / Relay Output	39
• Analog Input	40
• Analog Output	41
• Analog Input / Output	42
• RTD	43
• Thermocouple	44
• Positioning module	45
• High Speed counter module	46
• Modular type	47
• Communication	48
• Option modules/Smart link	50
• Software	51
• Product list	52
• Dimension	56




(Unit: mm)

	Item	W	H	D
XBM	DR / DN16S (16pt)	30	90	60
	DN32S (32pt)			
XBC / XEC	DR / DN32H (32pt)	114	90	64
	DR / DN64H (64pt)	180	90	64
Expansion	Relay Output / Ethernet	27	90	60
	Others	20	90	60

Block type unit


XBC/XEC (High performance type)

- 83ns/ Step processing speed
- Max. 10 expansion modules, Max. 384 I/O points control
- Max. 5-ch communication with built-in functions and expansion modules

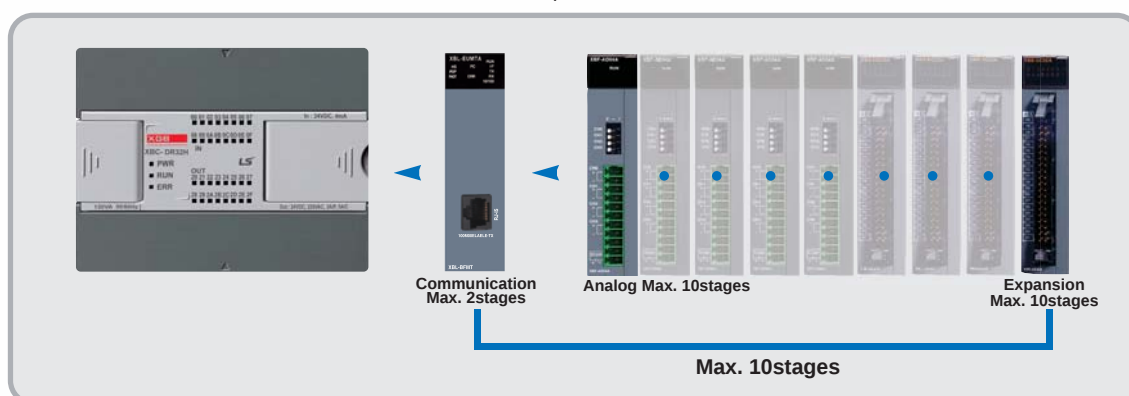

XBC/XEC (Standard type)

- 94ns/ Step processing speed
- Max. 7 expansion modules, Max. 2 option modules, Max. 254 I/O points control
- Max. 5-ch communication with built-in functions and expansion modules

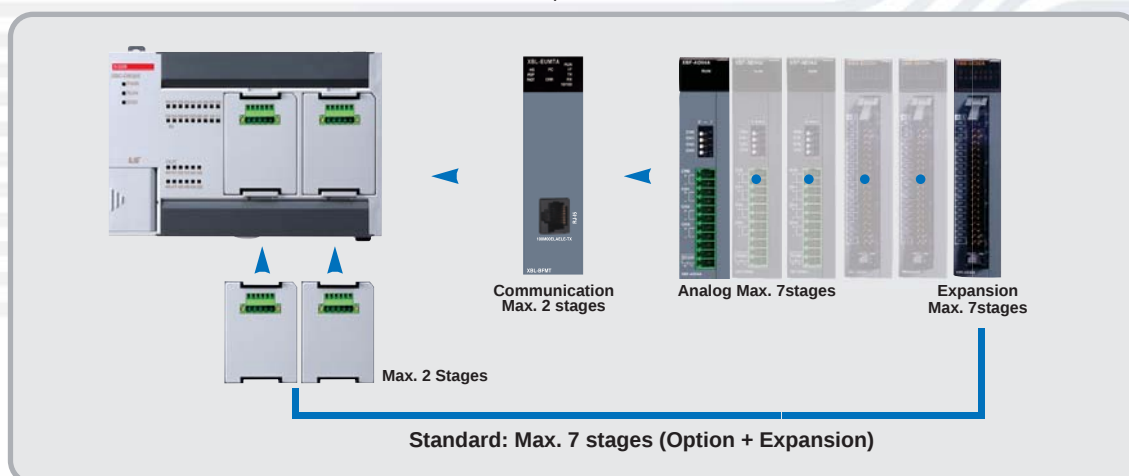

High performance

With its high-speed processing and system capability, XGB offers utmost efficiency for your applications.




XBC/XEC (Economic type)

- 240ns/ Step processing speed
- Max. 2 option modules, Max. 38 I/O points control
- 2-ch built-in communication functions (RS-232C/ RS485)



Max. 2 stages



Option modules

XBO-RTCA	RTC(Real Time Clock), Battery
XBO-DC04A	DC 24V, Input 4 points
XBO-TN04A	Transistor (Sink), Output 4 point
XBO-RD01A	RTD(Resistance Temperature Detect, Input 1 ch)
XBO-AD02A	Voltage/ Current, Input 2 chs
XBO-DA02A	Voltage/ Current, Output 2 chs
XBO-AH02A	Voltage/ Current, Input 1 ch
	Voltage/ Current, Output 1 ch
XBO-TC02A	TC(Thermocouple), Input 2 chs

Modular type unit

XBM (Standard type)

- 160ns/ Step processing speed
- Max. 7 expansion modules, Max. 256 I/O points control
- Max. 5-ch communication with built-in functions and expansion modules



Communication
Max. 2stages



Analog Max. 7stages



Expansion
Max. 7stages

Max. 7stages

XGB General specifications

Block type unit

(High performance,
Standard, Economic)



Item	Descriptions			Standard	
Ambient temperature	0 ~ 55 °C				
Storage temperature	- 25 ~ + 70 °C				
Ambient humidity	5 ~ 95%RH (Non-condensing)				
Storage humidity	5 ~ 95%RH (Non-condensing)				
Vibration resistance	Occasional vibration			10 times each direction (X, Y and Z)	IEC61131-2
	Frequency	Acceleration	Pulse width		
	10 ≤ f < 57Hz	–	0.075mm		
	57 ≤ f ≤ 150Hz	9.8m/s ² (1G)	–		
	Continuous vibration				
	Frequency	Acceleration	Pulse width		
	10 ≤ f < 57Hz	–	0.035mm		
	57 ≤ f ≤ 150Hz	4.9m/s ² (0.5G)	–		
Shock resistance	• Peak acceleration: 147m/s ² (15g) • Duration: 11ms • Pulse waveform: Half-sine, 3times each direction per each axis			IEC61131-2	
Noise resistance	Square wave impulse noise	±500 V		LSIS Standard	
	Electrostatic discharge	4kV		IEC61131-2 IEC61000-4-2	
	Radiated electromagnetic field noise	80 ~ 1000MHz, 10V/m		IEC61131-2 IEC61000-4-3	
	Fast transient/ Burst noise	Main unit	Expansion module	IEC61131-2 IEC61000-4-4	
		2kV	1kV		
Operating ambience	Free from corrosive gases and excessive dust				
Altitude	Up to 2,000m				
Pollution level ^{*1)}	Less than 2				
Cooling	Air-cooling				

^{*1)} Pollution level indicates the degree to which conductive material is generated in the environment where the equipment is used. Pollution level 2 is the condition that only non-conductive pollution occurred but temporary conductivity may be produced due to condensing.

Modular type unit

(XBM-DR16S, DN16S, DN32S)



Item	Descriptions			Standard	
Ambient temperature	0 ~ 55 °C				
Storage temperature	- 25 ~ + 70 °C				
Ambient humidity	5 ~ 95%RH (Non-condensing)				
Storage humidity	5 ~ 95%RH (Non-condensing)				
Vibration resistance	Occasional vibration		10 times each direction (X, Y and Z)	IEC61131-2	
	Frequency	Acceleration			Pulse width
	10 ≤ f < 57Hz	—			0.075mm
	57 ≤ f ≤ 150Hz	9.8m/s ² (1G)			—
	Continuous vibration				
	Frequency	Acceleration			Pulse width
	10 ≤ f < 57Hz	—			0.035mm
	57 ≤ f ≤ 150Hz	4.9m/s ² (0.5G)	—		
Shock resistance	• Peak acceleration: 147m/s ² (15g) • Duration: 11ms • Pulse waveform: Half-sine, 3times each direction per each axis			IEC61131-2	
Noise resistance	Square wave impulse noise	±500 V		LSIS Standard	
	Electrostatic discharge	4kV		IEC61131-2 IEC61000-4-2	
	Radiated electromagnetic field noise	80 ~ 1000MHz, 10V/m		IEC61131-2 IEC61000-4-3	
	Fast transient/ Burst noise	Main unit	Expansion module	IEC61131-2 IEC61000-4-4	
		2kV	1kV		
Operating ambience	Free from corrosive gases and excessive dust				
Altitude	Up to 2,000m				
Pollution level ^{*1)}	Less than 2				
Cooling	Air-cooling				

^{*1)} Pollution level indicates the degree to which conductive material is generated in the environment where the equipment is used. Pollution level 2 is the condition that only non-conductive pollution occurred but temporary conductivity may be produced due to condensing.

Names and functions

Block type unit


(High performance,
Standard, Economic)



No.	Name	Descriptions	Descriptions	Remark
1	Input LED	Input indication	Red On: Input signal On Red Off: Input signal Off	
2	Condition LED	PWR: Power indication	Red On: Power On Red Off: Power Off	
		RUN: RUN indication	Green On: PLC Run Green Off: PLC Stop	
		ERR: Error indication	Red On-and-Off: PLC Error Red Off: PLC Normal condition	
3	Output LED	Output LED	On: Output signal On Off: Output signal Off	
4	Expansion module connector	Expansion module connector	Connection of expansion module (I/O, Special function, Communication)	
5	PADT connector	PADT connection	Connector for XG5000 / XG-PD connection	
6	Mode switch	Mode setting	Setting Run/ Stop mode of PLC	
7	Input terminal block	Input wiring connection	—	
8	Output terminal block	Output wiring connection	—	
9	Built-in RS-485 connector	Built-in RS-485 connection	RS-485 + / - terminal connection	
10	Built-in RS-232C connector	Built-in RS-232C connection	RS-232C TxD, RxD, SG terminal connection	
11	Power terminal	Power supply terminal	AC 110-220V power supply	
12	Option module slot	Slot for option module	—	

Modular type unit

(XBM-DR16S, DN16S, DN32S)

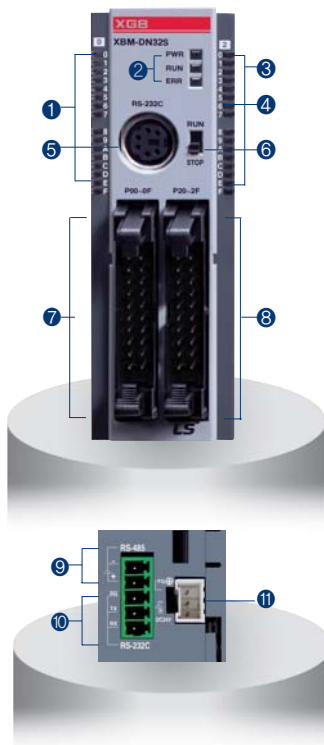

No.	Name	Descriptions	Descriptions	Remark
1	Input LED	Input indication	Red On: Input signal On Red Off: Input signal Off	
2	Condition LED	PWR: Power indication	Red On: Power On Red Off: Power Off	
		RUN: RUN indication	Green On: PLC Run Green Off: PLC Stop	
		ERR: Error indication	Red On-and-Off: PLC Error Red Off: PLC Normal condition	
3	Output LED	Output LED	On: Output signal On Off: Output signal Off	
4	Expansion module connector	Expansion module connector	Connection of expansion module (I/O, Special function, Communication)	
5	PADT connector	PADT connection	Connector for XG5000 / XG-PD connection	
6	Mode switch	Mode setting	Setting Run/ Stop mode of PLC	
7	Input connector / Terminal block	Input wiring connection	—	
8	Output connector / Terminal block	Output wiring connection	—	
9	Built-in RS-485 connector	Built-in RS-485 connection	RS-485 + / - terminal connection	
10	Built-in RS-232C connector	Built-in RS-232C connection	RS-232C TxD, RxD, SG terminal connection	
11	Power connector	Power supply connection	DC 24V power supply	

High performance type

Performance specifications

Item	XBC-DR32H XEC-DR32H ^(*) XBC-DR32H/DC	XBC-DN32H XEC-DN32H ^(*) XBC-DN32H/DC	XBC-DR64H XEC-DR64H ^(*) XBC-DR64H/DC	XBC-DN64H XEC-DN64H ^(*) XBC-DN64H/DC
Control method	Repetitive, cyclic, interrupt, constant scan			
I/O control method	Refresh mode (Batch processing by scan synchronization), Direct mode by instruction			
Programming language	Ladder diagram or IEC standard (LD, SFC, ST) ^(*)			
Processing speed	83 ns / Step			
Program capacity	15Kstep (IEC type: 200KB)			
Main unit I/O points	32 (Input:16, Output:16)	32 (Input:16, Output:16)	64 (Input: 32, Output: 32)	64 (Input: 32, Output: 32)
Max. I/O points (Main + Expansion 10 stages)	352 points		384 points	
Total program	128			
Operation mode	RUN, STOP, DEBUG			
Self diagnosis	Detects errors of scan time, memory error, I/O error, battery error, power error, etc.			
Program port	USB (Rev 1.1), RS-232C 1 channel (Loader)			
Retain data at power failure	Latch area setting at basic parameter			
Built-in functions	RS-232C / RS-485(2 ch), Pulse catch, Input filter, External interrupt, PID control, High-speed counter, Positioning, RTC			
Internal current consumption	660mA	260mA	1040mA	330mA
Weight	600g	500g	900g	800g
Rated voltage	AC 100 ~ 240V or DC24V			
Data memory				
XBC		XEC (IEC type)		
P	P0000 ~ P1023F (16,384 points)	Symbolic variable	A	32KB (Max. 16KB retain setting available)
M	M0000 ~ M1023F (16,384 points)	Input variable	I	2KB (%IX 15.15.63)
K	K0000 ~ K4095F (65,536 points)	Output variable	Q	2KB (%QX 15.15.63)
L	L0000 ~ L2047F (32,768 points)	Direct variable	M	16KB (Max. 8KB retain setting available)
F	F0000 ~ F1023F (16,384 points)		R	20KB (1 block)
T	100ms, 10ms, 1ms: T0000 ~ T1023 (1,024)(Adjustable by parameter setting)		W	20KB
C	C0000 ~ C1023 (1,024)		F	2KB
S	S00.00 ~ S127.99	Flag variable	K	8KB
D	D0000 ~ D10239 (10,240 word)		L	4KB
U	U00.00 ~ U0A.31 (Analog data refresh area: 352 word)		N	10KB
Z	Z000 ~ Z127 (128 word)		U	1KB
N	N000 ~ N5119 (5,120 word)	Flash area	R	20KB (2 blocks)

^{*1)} XEC is IEC standard language programming.

Standard type

Performance specifications

Item	XBC-DN/DP20SU XBC-DR20SU XEC-DN20SU XEC-DR20SU	XBC-DN/DP30SU XBC-DR30SU XEC-DN30SU XEC-DR30SU	XBC-DN/DP40SU XBC-DR40SU XEC-DN40SU XEC-DR40SU	XBC-DN/DP60SU XBC-DR60SU XEC-DN60SU XEC-DR60SU		
Control method	Repetitive, cyclic, interrupt, constant scan					
I/O control method	Refresh mode (Batch processing by scan synchronization), Direct mode by instruction					
Programming language	Ladder diagram, Instruction List					
Processing speed	94 ns / Step					
Program capacity	15Kstep					
Main unit I/O points	20 (Input:12, Output:8)	30 (Input:18, Output:12)	40 (Input:24, Output:16)	60 (Input:36, Output:24)		
Max. I/O points (Main + Expansion 7 stages)	244 points	254 points	264 points	284 points		
Total program	128					
Operation mode	RUN, STOP, DEBUG					
Self diagnosis	Detects errors of scan time, memory error, I/O error, battery error, power error, etc.					
Program port	RS-232C 1 channel (Loader), USB 1 channel (U-type model)					
Retain data at power failure	Latch area setting at basic parameter					
Built-in functions	RS-232C / RS-485(2 ch), Pulse catch, Input filter, External interrupt, PID control, High-speed counter, Positioning					
Internal current consumption	252mA/305mA	310mA/352mA	288mA/355mA	340mA/394mA		
	460mA	612mA	684mA	942mA		
	252mA	270mA	288mA	340mA		
	478mA	626mA	684mA	942mA		
Weight	475g	474g	578g	636g		
	514g	528g	594g	804g		
	475g	474g	578g	636g		
	514g	528g	594g	804g		
Rated voltage	AC 100 ~ 240V					
Data memory						
XBC			XEC			
Data area	P	P0000 ~ P1023F (16,384 points)		Symbolic variable	A	16KB (Max. 16KB retain setting available)
	M	M0000 ~ M1023F (16,384 points)				
	K	K0000 ~ K4095F (65,536 points)		Input variable	I	2KB(%IX 15.15.63)
	L	L0000 ~ L2047F (32,768 points)		Output variable	Q	2KB(%QX 15.15.63)
	F	F0000 ~ F1023F (16,384 points)		Direct variable	M	8KB (Max. retain setting available)
	T	100ms, 10ms, 1ms: T0000 ~ T1023 (1,024) (Adjustable by parameter setting)				
	C	C0000 ~ C1023 (1,024)				
	S	S00.00 ~ S127.99				
	D	D0000 ~ D10239 (10,240 word)		Flag variable	K	8KB
	U	U00.00 ~ U0A.31 (Analog data refresh area: 352 word)				
	Z	Z000 ~ Z127 (128 word)				
	R	N0000 ~ N10236 (10,240 word)				
			Flash area		20KB (2 block)	

*Some products are due in market soon.

Economic type

Performance specifications

Item	Specifications ('E' type)			
	XBC/XEC-DR10E	XBC/XEC-DR14E	XBC/XEC-DR20E	XBC/XEC-DR30E
	XBC/XEC-DN10E	XBC/XEC-DN14E	XBC/XEC-DN20E	XBC/XEC-DN30E
	XBC/XEC-DP10E	XBC/XEC-DP14E	XBC/XEC-DP20E	XBC/XEC-DP30E
Program control method	Reiterative operation, Fixed cycle operation			
I/O control method	Scan synchronized batch processing method (Refresh method) Direct method by instruction			
Program language	Ladder Diagram (LD), Sequential Function Chart (SFC) Structured Text (ST), Instruction List (IL)			
Processing speed (Basic instruction)	240 ns/step			
Program capacity	4 Kstep (XBC-Dxxx E), 50 KB (XEC-Dxxx E)			
Max. I/O points (Main+Option X)	14 point (1 option)	18 point (1 option)	28 point (2 option)	38 point (2 option)
Operation Mode	RUN, STOP, DEBUG			
Total number of program block	128			
Task	Initialization	1		
	Fixed period	8		
	External input	4 (%I×0.0.0~%I×0.0.3)		
	Internal device	8		
Program port	RS-232C 1 channel (Loader)			
Self -diagnostic functions	Watchdog Timer, Memory error detection I/O error detection, etc.			
Built -in functions	RS-232C or RS-485(1 ch), Pulse catch, Input filter, External interrupt, High-speed counter			
Data keeping method at power failure	Setting to retain area at basic parameter			
Internal consumption current (mA)	250	315	355	485
	180	190	200	210
	180	190	200	210
Weight (g)	330	340	450	465
	313	315	418	423
	313	315	418	423
Rated voltage	AC 100 ~ 240V			



Standard type

Performance specifications

Item	XBM-DR16S	XBM-DN16S	XBM-DN32S
Control method	Repetitive, cyclic, fixed cycle operation, constant scan		
I/O control method	Refresh mode (Batch processing by scan synchronization), Direct mode by instruction		
Programming language	Ladder diagram, Instruction List		
Processing speed	160 ns/Step		
Program capacity	10Kstep		
Main unit I/O points	16 points (Input:8, Output:8)	16 points (Input:8, Output:8)	32 points (Input:16, Output:16)
Max. I/O points (Main + Expansion 7 stages)	240 points		256 points
Total program	128		
Operation mode	RUN, STOP, DEBUG		
Self diagnosis	Detects errors of scan time, memory error, I/O error, battery error, power error, etc.		
Program port	RS-232C 1 channel (Loader)		
Retain data at power failure	Latch area setting at basic parameter		
Built-in functions	RS-232C/RS-485(2 ch), Pulse catch, Input filter, External interrupt, PID control, High-speed counter, Positioning ^{*1)}		
Internal current consumption	400mA	250mA	280mA
Weight	140g	100g	100g
Rated voltage	DC24V		
Data memory			
XBM			
Data area	P	P0000 ~ P127F (2,048 points)	
	M	M0000 ~ M255F (4,096 points)	
	K	K0000 ~ K2559F (Special area: K2600~K2559F) (40,960 points)	
	L	L0000 ~ L1279F (20,480 points)	
	F	F000 ~ F255F (4,096 points)	
	T	100ms, 10ms, 1ms: T000 ~ T255 (256) (Adjustable by parameter setting)	
	C	C000 ~ C255 (256)	
	S	S00.00 ~ S127.99	
	D	D0000 ~ D5119 (5,120 word)	
	U	U00.00 ~ U07.31 (Analog data refresh area: 256 word)	
	Z	Z000 ~ Z127 (128 word)	
	N	N0000 ~ N3935 (3,936 word)	

*1) XBM-DR16S does not have built-in positioning function.



High performance type

Input specification

Item		XBC-DR32H XEC-DR32H	XBC-DN32H XEC-DN32H	XBC-DR64H XEC-DR64H	XBC-DN64H XEC-DN64H	XEC-DR32H/D1 XEC-DR64H/D1
Input points		16 points		32 points		16 points
Rated input voltage		DC 24V				DC 12/24V
Rated input current		4mA (Contact 0~7: 9mA)				5 / 10mA(Contact 0~7 : 7/15mA)
Operation voltage range		DC 20.4 ~ 28.8V (Ripple rate < 5%)				DC 9.5~30V(Ripple rate < 5%)
On voltage / On current		DC 19V or more / 3mA or more				DC 9V or more / 3mA or more
Off voltage / Off current		DC 6V or less / 1mA or less				DC 5V or less / 1mA or less
Input resistance		5.6k Ω (P00 ~ P07: 2.7k Ω)				2.7k Ω (%IX0.0~%IX0.7:1.8k Ω)
Response time	Off → On	1 / 3 / 5 / 10 / 20 / 70 / 100 ms (Setting by CPU parameter) Initial value: 3ms				
	On → Off					
Weight		600g	500g	900g	800g	600g

Relay output specification

Item	XBC-DR32H/XEC-DR32H	XBC-DR64H/XEC-DR64H
Output point	16 points	32 points
Insulation method	Relay insulation	
Rated load voltage / current	DC 24V 2A (Resistive load) / AC 220V 2A (COS ϕ = 1), 5A / COM	
Min. load voltage / current	DC 5V / 1mA	
Max. load voltage	AC 250V, DC 125V	
Off leakage current	0.1mA (AC 220V, 60Hz)	
Max. On / Off frequency	3,600 times / hr	
Service life	Mechanical	20millions times or more
	Electrical	Rated load voltage / current 100,000 times or more
		AC 200V / 1.5A, AC 240V / 1A (COS ϕ = 0.7) 100,000 times or more
		AC 200V / 1A, AC 240V / 0.5A (COS ϕ = 0.35) 100,000 times or more
Response time	Off $\rightarrow$ On	10ms or less
	On $\rightarrow$ Off	12ms or less
Common method	4 points / COM	P20 ~ 2F: 4 points / COM P30 ~ 3F: 8 points / COM

Transistor output specification

Item	XBC-DN32H/XEC-DN32H	XBC-DN64H/XEC-DN64H
Output point	16 points	32 points
Insulation method	Photo coupler insulation	
Rated load voltage	DC 12 / 24V	
Load voltage range	DC 10.2 ~ 26.4 V	
Max. load voltage	0.5A / 1point (P20 ~ 23: 0.1A / point)	
Off leakage current	0.1mA or less	
Max. inrush current	4A / 10ms or less	
Max. voltage drop (On)	DC 0.4V or less	
Surge absorber	Zener Diode	
Response time	Off $\rightarrow$ On	1ms or less
	On $\rightarrow$ Off	1ms or less (Rated load, resistive load)
Common method	4 points / COM	P20 ~ 2F: 4 points / COM P30 ~ 3F: 8 points / COM
External power supply	Voltage	DC 12 / 24V $\pm$ 10% (Ripple voltage 4 Vp-p or less)
	Current	10mA or less (DC 24V connection)

Standard type

Input specification

Item	XBC-DN20SU XBC-DR20SU	XBC-DN30SU XBC-DR30SU	XBC-DN40SU XBC-DR40SU	XBC-DN60SU XBC-DR60SU
Input point	12 points	18 points	24 points	36 points
Rated input voltage	DC 24V			
Rated input current	4mA(Contact point 0~1 : 16mA, 2~7 : 10mA), DN20SU(DN30SU) : 4mA(Contact point 0~7: 10mA)			
Operation voltage range	DC 20.4 ~ 28.8V (Ripple rate < 5%)			
On voltage / On current	DC 19V or more / 3mA or more			
Off voltage / Off current	DC 6V or less / 1mA or less			
Input resistance	5.6k Ω (P00 ~ P07 : 2.7k Ω)			
Response time	Off $\rightarrow$ On On $\rightarrow$ Off	1 / 3 / 5 / 10 / 20 / 70/ 100ms (Setting by CPU parameter) Initial value : 3ms		

Transistor output specification (Sink/Source type)

Item	XBC-DN20SU XEC-DN20SU XBC-DP20SU	XBC-DN30SU XEC-DN30SU XBC-DP30SU	XBC-DN40SU XEC-DN40SU XBC-DP40SU	XBC-DN60SU XEC-DN60SU XBC-DP60SU
Output point	8 points	12 points	16 points	24 points
Insulation method	Photo coupler insulation			
Rated load voltage	DC 12 / 24V			
Load voltage range	DC 10.2 ~ 26.4V			
Max. load voltage	0.5A / 1 point, 2A / 1COM			
Off leakage current	0.1mA or less			
Max. inrush current	4A / 10ms or less			
Max voltage drop (on)	DC 0.4V or less			
Surge absorber	Zener Diode			
Response time	Off $\rightarrow$ On On $\rightarrow$ Off	DC 12 / 24V $\pm$ 10%(Ripple voltage 4Vp-p or less) 25mA or less (DC 24V connection)		

Relay output specification

Item		XBC-DR20SU	XBC-DR30SU	XBC-DR40SU	XBC-DR60SU
Output point		8 points	12 points	16 points	24 points
Insulation method		Relay insulation			
Rated load voltage/current		DC 24V 2A / AC 220V 2A (COS Ø = 1), 5A / COM			
Min. load voltage/current		DC 5V / 1mA			
Max. load Current		AC 250V, DC 125V			
Off leakage current		0.1mA (AC 220V, 60Hz)			
Surge absorber		-			
Response time	Off → On	10ms or less			
	On → Off	12ms or less			
Common method (/ COM)		4 points / COM (P40, P41 : 1 point / COM), (P42 P43 : 2 points / COM)			
Life-cycle	Mechanical	Rated load voltage / Current 10 million times or more			
		AC 220V / 1.5A, AC 240V / 1A (COSØ = 0.7) 10 million times or more			
	Electrical	AC 200V / 1A, AC 240V / 0.5A (COSØ = 0.35) 10 million times or more			
		DC 24V / 1A, DC 100V / 0.1A (L / R = 7ms) 10 million times or more			

Economic type

Input specification

Specification	Modal	Main unit			
		XBC/XEC-DR10E	XBC/XEC-DR14E	XBC/XEC-DR20E	XBC/XEC-DR30E
		XBC/XEC-DN10E	XBC/XEC-DN14E	XBC/XEC-DN20E	XBC/XEC-DN30E
		XBC/XEC-DP10E	XBC/XEC-DP14E	XBC/XEC-DP20E	XBC/XEC-DP30E
Input point		6 points	8 points	12 points	18 points
Insulation method		Photo coupler insulation			
Rated input voltage		DC 24V			
Rated input current		About 4mA (Contact point 0~3: about 7mA)			
Operation voltage range		DC 20.4~28.8V (Within ripple rate 5%)			
On voltage / On current		DC 19V or higher / 3mA or higher			
Off voltage / Off current		DC 6V or lower / 1mA or lower			
Input resistance		About 5.6k Ω (%I $\times$ 0.0.0~%I $\times$ 0.0.3: about 2.7k Ω)			
Response time	Off $\rightarrow$ On	1 / 3 / 5 / 10 / 20 / 70 / 100ms (Set by I/O parameter) Default: 3ms			
	On $\rightarrow$ Off				
Insulation pressure		AC 560Vrms / 3 cycle (Altitude 2000m)			
Insulation resistance		10k Ω or more by MegOhmMeter			
Common method		6 points / COM	8 points / COM	12 points / COM	18 points / COM
Proper cable size		0.3mm ²			
Operation indicator		LED On when Input On			
External connection method		14 point terminal block connector (M3 $\times$ 6 screw)		24 point terminal block connector (M3 $\times$ 6 screw)	
Weight		330g	340g	450g	465g
		313g	315g	418g	423g
		313g	315g	418g	423g

Relay output specification

Specification	Modal	Main unit			
		XBC/XEC-DR10E	XBC/XEC-DR14E	XBC/XEC-DR20E	XBC/XEC-DR30E
Output point		4 points	6 points	8 points	12 points
Insulation method		Relay insulation			
Rated load voltage / Current		DC 24V 2A (resistive load) / AC 220V 2A (COS ϕ = 1), 5A / COM			
Min. load voltage / Current		DC 5V / 1mA			
Max. load voltage		AC 250V, DC 125V			
Off leakage current		0.1mA (AC 220V, 60Hz)			
Max. On / Off frequency		3,600 times / hour			
Surge absorber		None			
Service life	Mechanical	20 million times or more			
	Electrical	Rated load voltage / Current 100,000 times or more			
		AC 200V / 1.5A, AC 240V / 1A (CO ϕ = 0.7) 100,000 times or more			
		AC 200V / 1A, AC 240V / 0.5A (CO ϕ = 0.35) 100,000 times or more			
		DC 24V / 1A, DC 100V / 0.1A (L / R = 7ms) 100,000 times or more			
Response time	Off $\rightarrow$ On	10ms or less			
	On $\rightarrow$ Off	12ms or less			
Common method		2 points / COM	4 points / COM	4 points / COM	4 points / COM
Proper cable size		Stranded cable 0.3~0.75mm ² (External diameter 2.8mm or less)			
Operation indicator		LED On when Output On			
External connection method		14 point terminal block connector (M3 $\times$ 6 screw)		24 point terminal block connector (M3 $\times$ 6 screw)	

Transistor output specification (Sink / Source type)

Specification	Modal	Main unit			
		XBC/XEC-DN10E XBC/XEC-DP10E	XBC/XEC-DN14E XBC/XEC-DP14E	XBC/XEC-DN20E XBC/XEC-DP20E	XBC/XEC-DN30E XBC/XEC-DP30E
Output point		4 points	6 points	8 points	12 points
Insulation method		Photo coupler insulation			
Rated load voltage		DC 12/24V			
Operation load voltage range		DC 10.2 ~ 26.4V			
Max. load current		0.5A/1 point, 2A/1COM			
Off leakage current		0.1mA or less			
Max. inrush current		4A/10ms or less			
Max. voltage drop when On		DC 0.4V or less			
Surge absorber		Zener diode			
Response time	Off → On	1ms less			
	On → Off	1ms less (Rated load, resistive load)			
Common method		4 point / COM			
Proper wire size		Stranded wire 0.3~0.75mm ² (External diameter 2.8mm or less)			
External power	Voltage	DC 12/24V ± 10% (Ripple voltage 4 Vp-p or less)			
	Current	25mA or less (When connecting DC 24V)			
Operation indicator		LED On when Output On			
External connection method		14 point terminal block connector (M3 × 6 screw)		24 point terminal block connector (M3 × 6 screw)	

Standard type

Input specification

Item	XBM-DR16S	XBM-DN16S	XBM-DN32S
Input point	8 points	8 points	16 points
Rated input voltage	DC 24V		
Rated input current	4mA (00 ~ 03: 7mA)		
Operation voltage range	DC 20.4 ~ 28.8V (Ripple rate < 5%)		
Response time	Off → On	1 / 3 / 5 / 10 / 20 / 70 / 100ms (Set by CPU parameter) Default: 3ms	
	On → Off		
Common method	8 points / COM		16 points / COM

Standard type

Relay output specification

Item		XBM-DR16S
Output point		8 points
Insulation method		Relay insulation
Rated load voltage / current		DC 24V 2A (Resistive load) / AC 220V 2A (COS ϕ = 1), 5A / COM
Min. load voltage / current		DC 5V / 1mA
Max. load voltage		AC 250V, DC 125V
Off leakage current		0.1mA (AC 220V, 60Hz)
Max. On / Off frequency		3,600 times / hr
Service life	Mechanical	20 millions times or more
	Electrical	Rated load voltage / Current 100,000 times or more
		AC 200V / 1.5A, AC 240V / 1A (COS ϕ = 0.7) 100,000 times or more
		AC 200V / 1A, AC 240V / 0.5A (COS ϕ = 0.35) 100,000 times or more
Response time	Off $\rightarrow$ On	10ms or less
	On $\rightarrow$ Off	12ms or less
Common method		8 points / COM

Transistor output specification

Item		XBM-DN16S	XBM-DN32S
Output point		8 point	16 point
Insulation method		Photo coupler insulation	
Rated load voltage		DC 12/24V	
Load voltage range		DC 10.2 ~ 26.4V	
Max. load voltage		0.2A / 1 point (P20 ~ 23: 0.1A / Point)	
Max. inrush current		4A / 10ms or less	
Max. voltage drop (On)		DC 0.4V or less	
Response time	Off $\rightarrow$ On	1ms or less	
	On $\rightarrow$ Off	1ms or less (Rated load, Resistive load)	
Common method		8 point / COM	16 point / COM
External power supply	Voltage	DC 12 / 24V $\pm$ 10% (Ripple voltage 4 Vp-p or less)	
	Current	25mA or less (DC 24V connection)	
External connection method		20pin connector	

High performance type (H-Type 32 points unit)

Input wiring

(XBC-DR32H / XBC-DN32H

XEC-DR32H / XEC-DN32H)

Circuit configuration		No.	Contact	No.	Contact	Type
		TB2	485+	TB1	RX	
		TB4	485-	TB3	TX	
		TB6	00	TB5	SG	
		TB8	02	TB7	01	
		TB10	04	TB9	03	
		TB12	06	TB11	05	
		TB14	08	TB13	07	
		TB16	0A	TB15	09	
		TB18	0C	TB17	0B	
		TB20	0E	TB19	0D	
		TB22	COM	TB21	0F	
		TB24	24V	TB23	24G	

Transistor output wiring

(XBC-DN32H / XEC-DN32H)

Circuit configuration		No.	Contact	No.	Contact	Type
		TB2	FG	TB1	AC100	
		TB4	DC12/24V	TB3	~240V	
		TB6	21	TB5	20	
		TB8	23	TB7	22	
		TB10	24	TB9	COM0	
		TB12	26	TB11	25	
		TB14	COM1	TB13	27	
		TB16	29	TB15	28	
		TB18	2B	TB17	2A	
		TB20	2C	TB19	COM2	
		TB22	2E	TB21	2D	
		TB24	COM3	TB23	2F	

Relay output wiring

(XBC-DR32H / XEC-DR32H)

Circuit configuration		No.	Contact	No.	Contact	Type
		TB2	FG	TB1	AC100	
		TB4	NC	TB3	~240V	
		TB6	21	TB5	20	
		TB8	23	TB7	22	
		TB10	24	TB9	COM0	
		TB12	26	TB11	25	
		TB14	COM1	TB13	27	
		TB16	29	TB15	28	
		TB18	2B	TB17	2A	
		TB20	2C	TB19	COM2	
		TB22	2E	TB21	2D	
		TB24	COM3	TB23	2F	

High performance type (H-Type 64 points unit)

Input wiring

(XBC-DR64H / XBC-DN64H

XEC-DR64H / XEC-DN64H)

Circuit configuration		No.	Contact	No.	Contact	Type	
		TB2	485+	TB1	RX		
		TB4	485-	TB3	TX		
		TB6	00	TB5	SG		
		TB8	02	TB7	01		
		TB10	04	TB9	03		
		TB12	06	TB11	05		
		TB14	08	TB13	07		
		TB16	0A	TB15	09		
		TB18	0C	TB17	0B		
		TB20	0E	TB19	0D		
		TB22	COM0	TB21	0F		
		TB24	10	TB23	NC		
		TB26	12	TB25	11		
		TB28	14	TB27	13		
		TB30	16	TB29	15		
		TB32	18	TB31	17		
		TB34	1A	TB33	19		
		TB36	1C	TB35	1B		
		TB38	1E	TB37	1D		
		TB40	COM1	TB39	1F		
		TB42	24V	TB41	24G		

Transistor output wiring

(XBC-DN64H / XEC-DN64H)

Circuit configuration		No.	Contact	No.	Contact	Type	
		TB2	FG	TB1	AC100		
		TB4	DC12/24V	TB3	~240V		
		TB6	21	TB5	20		
		TB8	23	TB7	22		
		TB10	24	TB9	COM0		
		TB12	26	TB11	25		
		TB14	COM1	TB13	27		
		TB16	29	TB15	28		
		TB18	2B	TB17	2A		
		TB20	2C	TB19	COM2		
		TB22	2E	TB21	2D		
		TB24	COM3	TB23	2F		
		TB26	31	TB25	30		
		TB28	33	TB27	32		
		TB30	35	TB29	34		
		TB32	37	TB31	36		
		TB34	38	TB33	COM4		
		TB36	3A	TB35	3B		
		TB38	3C	TB37	3D		
		TB40	3E	TB39	3D		
		TB42	COM5	TB41	3F		

Relay output wiring (XBC-DR64H / XEC-DR64H)

Circuit configuration		No.	Contact	No.	Contact	Type	
	TB2	FG	TB1	AC100		TB1	AC100 ~240V
	TB4	NC	TB3	20		TB3	
	TB6	21	TB5	22		TB5	
	TB8	23	TB7	COM0		TB7	
	TB10	24	TB9	25		TB9	
	TB12	26	TB11	27		TB11	
	TB14	COM1	TB13	28		TB13	
	TB16	29	TB15	2A		TB15	
	TB18	2B	TB17	COM2		TB17	
	TB20	2C	TB19	2D		TB19	
	TB22	2E	TB21	2F		TB21	
	TB24	COM3	TB23	30		TB23	
	TB26	31	TB25	32		TB25	
	TB28	33	TB27	34		TB27	
	TB30	35	TB29	36		TB29	
	TB32	37	TB31	38		TB31	
	TB34	38	TB33	39		TB33	
	TB36	3A	TB35	3B		TB35	
	TB38	3C	TB37	3D		TB37	
	TB40	3E	TB39	3F		TB39	
	TB42	COM5	TB41	3F		TB41	



Standard type

Input wiring (XBC-DN20SU/XBC-DR20SU/ XEC-DN20S/XEC-DR20SU)



Circuit configuration		No.	Contact	No.	Contact	Type	
	TB2	485+	TB1	RX		TB1	RX
	TB4	485-	TB3	TX		TB3	
	TB6	00	TB5	SG		TB5	
	TB8	02	TB7	01		TB7	
	TB10	04	TB9	03		TB9	
	TB12	06	TB11	05		TB11	
	TB14	08	TB13	07		TB13	
	TB16	0A	TB15	09		TB15	
	TB18	NC	TB17	0B		TB17	
	TB20	NC	TB19	NC		TB19	
	TB22	NC	TB21	NC		TB21	
	TB24	COM	TB23	NC		TB23	

High performance type (H-Type 64 points unit)



Transistor output wiring (XBC-DN20SU/XEC-DN20SU)

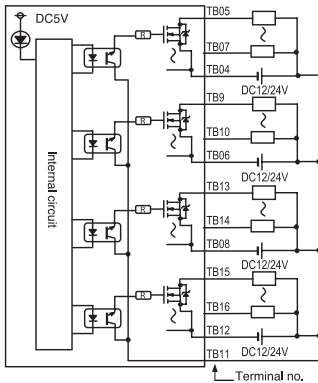Circuit configuration	No.	Contact	No.	Contact	Type
	TB2	FG	TB1	AC100	
	TB4	COM0	TB3	~240V	
	TB6	COM1	TB5	40	
	TB8	COM2	TB7	41	
	TB10	43	TB9	42	
	TB12	COM3	TB11	P	
	TB14	45	TB13	44	
	TB16	47	TB15	46	
	TB18	NC	TB17	NC	
	TB20	NC	TB19	NC	
	TB22	NC	TB21	NC	
	TB24	24G	TB23	24V	

Relay output wiring (XBC-DR20SU/XEC-DR20SU)

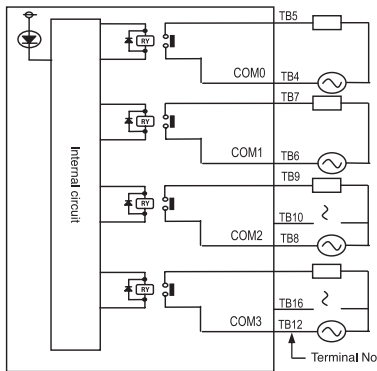

Circuit configuration	No.	Contact	No.	Contact	Type
	TB2	FG	TB1	AC100	
	TB4	COM0	TB3	~240V	
	TB6	COM1	TB5	40	
	TB8	COM2	TB7	41	
	TB10	43	TB9	42	
	TB12	COM3	TB11	NC	
	TB14	45	TB13	44	
	TB16	47	TB15	46	
	TB18	NC	TB17	NC	
	TB20	NC	TB19	NC	
	TB22	NC	TB21	NC	
	TB24	24G	TB23	24V	

Input wiring (XBC-DN30SU/XBC-DR30SU/ XEC-DN30SU/XEC-DR30SU)

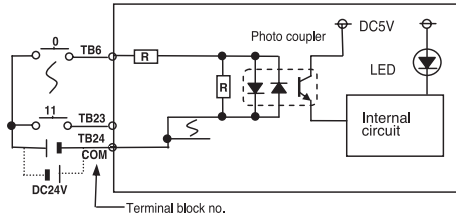

Circuit configuration	No.	Contact	No.	Contact	Type
	TB2	485+	TB1	RX	
	TB4	485-	TB3	TX	
	TB6	00	TB5	SG	
	TB8	02	TB7	01	
	TB10	04	TB9	03	
	TB12	06	TB11	05	
	TB14	08	TB13	07	
	TB16	0A	TB15	09	
	TB18	0C	TB17	0B	
	TB20	0E	TB19	0D	
	TB22	10	TB21	0F	
	TB24	COM	TB23	11	

Standard type



Transistor output wiring (XBC-DN30SU/ XEC-DN30SU)

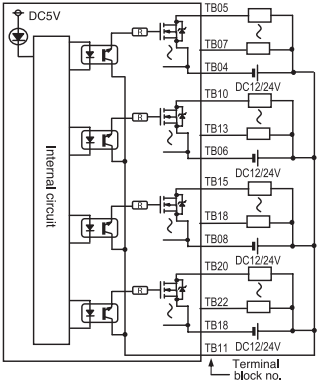Circuit configuration	No.	Contact	No.	Contact	Type
	TB2	FG	TB1	AC100	
	TB4	COM0	TB3	~240V	
	TB6	COM1	TB5	40	
	TB8	COM2	TB7	41	
	TB10	43	TB9	42	
	TB12	COM3	TB11	P	
	TB14	45	TB13	44	
	TB16	47	TB15	46	
	TB18	COM4	TB17	NC	
	TB20	49	TB19	48	
	TB22	4B	TB21	4A	
	TB24	24G	TB23	24V	

Relay output wiring (XBC-DR30SU/ XEC-DR30SU)

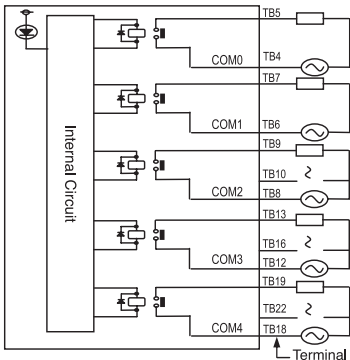
Circuit configuration	No.	Contact	No.	Contact	Type
	TB2	FG	TB1	AC100	
	TB4	COM0	TB3	~240V	
	TB6	COM1	TB5	40	
	TB8	COM2	TB7	41	
	TB10	43	TB9	42	
	TB12	COM3	TB11	NC	
	TB14	45	TB13	44	
	TB16	47	TB15	46	
	TB18	COM4	TB17	NC	
	TB20	49	TB19	48	
	TB22	4B	TB21	4A	
	TB24	24G	TB23	24V	

Input wiring (XBC-DN40SU/ XEC-DN40SU)

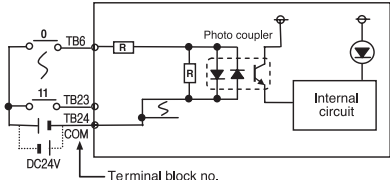Circuit configuration	No.	Contact	No.	Contact	Type
	TB2	485+	TB1	RX	
	TB4	485-	TB3	TX	
	TB6	00	TB5	SG	
	TB8	02	TB7	01	
	TB10	04	TB9	03	
	TB12	06	TB11	05	
	TB14	08	TB13	07	
	TB16	0A	TB15	09	
	TB18	0C	TB17	0B	
	TB20	0E	TB19	0D	
	TB22	10	TB21	0F	
	TB24	12	TB23	11	
	TB26	14	TB25	13	
	TB28	16	TB27	15	
	TB30	COM	TB29	17	

Standard type


Transistor output wiring (XBC-DN40SU/XEC-DN40SU)

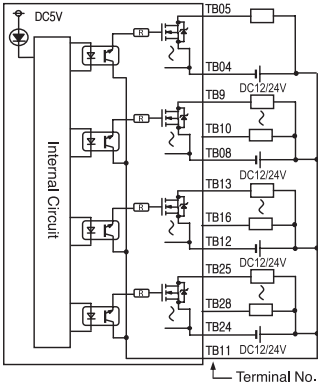Circuit configuration	No.	Contact	No.	Contact	Type																																													
	TB2	FG	TB1	AG100	<table><tr><td>TB1</td><td>AG100</td><td>TB1</td></tr><tr><td>TB3</td><td>~240V</td><td>TB3</td></tr><tr><td>TB5</td><td>40</td><td>TB5</td></tr><tr><td>TB7</td><td>41</td><td>TB7</td></tr><tr><td>TB9</td><td>42</td><td>TB9</td></tr><tr><td>TB11</td><td>P</td><td>TB11</td></tr><tr><td>TB13</td><td>44</td><td>TB13</td></tr><tr><td>TB15</td><td>46</td><td>TB15</td></tr><tr><td>TB17</td><td>NC</td><td>TB17</td></tr><tr><td>TB19</td><td>48</td><td>TB19</td></tr><tr><td>TB21</td><td>4A</td><td>TB21</td></tr><tr><td>TB23</td><td>NC</td><td>TB23</td></tr><tr><td>TB25</td><td>4C</td><td>TB25</td></tr><tr><td>TB27</td><td>4E</td><td>TB27</td></tr><tr><td>TB29</td><td>24V</td><td>TB29</td></tr></table>	TB1	AG100	TB1	TB3	~240V	TB3	TB5	40	TB5	TB7	41	TB7	TB9	42	TB9	TB11	P	TB11	TB13	44	TB13	TB15	46	TB15	TB17	NC	TB17	TB19	48	TB19	TB21	4A	TB21	TB23	NC	TB23	TB25	4C	TB25	TB27	4E	TB27	TB29	24V	TB29
	TB1	AG100	TB1																																															
	TB3	~240V	TB3																																															
	TB5	40	TB5																																															
	TB7	41	TB7																																															
	TB9	42	TB9																																															
	TB11	P	TB11																																															
	TB13	44	TB13																																															
	TB15	46	TB15																																															
	TB17	NC	TB17																																															
	TB19	48	TB19																																															
	TB21	4A	TB21																																															
	TB23	NC	TB23																																															
	TB25	4C	TB25																																															
	TB27	4E	TB27																																															
TB29	24V	TB29																																																
TB4	COM0	TB3	~240V																																															
TB6	COM1	TB5	40																																															
TB8	COM2	TB7	41																																															
TB10	43	TB9	42																																															
TB12	COM3	TB11	P																																															
TB14	45	TB13	44																																															
TB16	47	TB15	46																																															
TB18	COM4	TB17	NC																																															
TB20	49	TB19	48																																															
TB22	4B	TB21	4A																																															
TB24	COM5	TB23	NC																																															
TB26	4D	TB25	4C																																															
TB28	4F	TB27	4E																																															
TB30	24G	TB29	24V																																															

Input wiring (XBC-DR40SU/XEC-DR40SU)


Circuit configuration	No.	Contact	No.	Contact	Type																																													
Terminal block no.	TB2	485+	TB1	RX	<table><tr><td>TB1</td><td>RX</td><td>TB1</td></tr><tr><td>TB3</td><td>TX</td><td>TB3</td></tr><tr><td>TB5</td><td>SG</td><td>TB5</td></tr><tr><td>TB7</td><td>01</td><td>TB7</td></tr><tr><td>TB9</td><td>03</td><td>TB9</td></tr><tr><td>TB11</td><td>05</td><td>TB11</td></tr><tr><td>TB13</td><td>07</td><td>TB13</td></tr><tr><td>TB15</td><td>09</td><td>TB15</td></tr><tr><td>TB17</td><td>0B</td><td>TB17</td></tr><tr><td>TB19</td><td>0D</td><td>TB19</td></tr><tr><td>TB21</td><td>0F</td><td>TB21</td></tr><tr><td>TB23</td><td>11</td><td>TB23</td></tr><tr><td>TB25</td><td>13</td><td>TB25</td></tr><tr><td>TB27</td><td>15</td><td>TB27</td></tr><tr><td>TB29</td><td>17</td><td>TB29</td></tr></table>	TB1	RX	TB1	TB3	TX	TB3	TB5	SG	TB5	TB7	01	TB7	TB9	03	TB9	TB11	05	TB11	TB13	07	TB13	TB15	09	TB15	TB17	0B	TB17	TB19	0D	TB19	TB21	0F	TB21	TB23	11	TB23	TB25	13	TB25	TB27	15	TB27	TB29	17	TB29
	TB1	RX	TB1																																															
	TB3	TX	TB3																																															
	TB5	SG	TB5																																															
	TB7	01	TB7																																															
	TB9	03	TB9																																															
	TB11	05	TB11																																															
	TB13	07	TB13																																															
	TB15	09	TB15																																															
	TB17	0B	TB17																																															
	TB19	0D	TB19																																															
	TB21	0F	TB21																																															
	TB23	11	TB23																																															
	TB25	13	TB25																																															
	TB27	15	TB27																																															
TB29	17	TB29																																																
TB4	485-	TB3	TX																																															
TB6	00	TB5	SG																																															
TB8	02	TB7	01																																															
TB10	04	TB9	03																																															
TB12	06	TB11	05																																															
TB14	08	TB13	07																																															
TB16	0A	TB15	09																																															
TB18	0C	TB17	0B																																															
TB20	0E	TB19	0D																																															
TB22	10	TB21	0F																																															
TB24	12	TB23	11																																															
TB26	14	TB25	13																																															
TB28	16	TB27	15																																															
TB30	COM	TB29	17																																															

Relay output wiring (XBC-DR40SU/XEC-DR40SU)

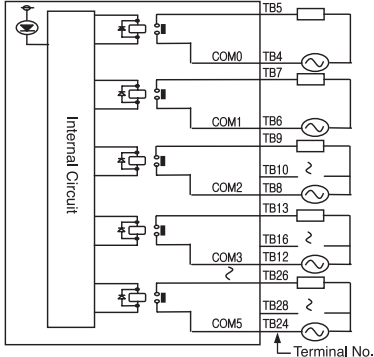Circuit configuration	No.	Contact	No.	Contact	Type																																													
	TB2	FG	TB1	RX	<table><tr><td>TB1</td><td>AG100</td><td>TB1</td></tr><tr><td>TB3</td><td>~240V</td><td>TB3</td></tr><tr><td>TB5</td><td>P40</td><td>TB5</td></tr><tr><td>TB7</td><td>P41</td><td>TB7</td></tr><tr><td>TB9</td><td>P42</td><td>TB9</td></tr><tr><td>TB11</td><td>P</td><td>TB11</td></tr><tr><td>TB13</td><td>P44</td><td>TB13</td></tr><tr><td>TB15</td><td>P46</td><td>TB15</td></tr><tr><td>TB17</td><td>NC</td><td>TB17</td></tr><tr><td>TB19</td><td>P48</td><td>TB19</td></tr><tr><td>TB21</td><td>P4A</td><td>TB21</td></tr><tr><td>TB23</td><td>NC</td><td>TB23</td></tr><tr><td>TB25</td><td>P4C</td><td>TB25</td></tr><tr><td>TB27</td><td>P4E</td><td>TB27</td></tr><tr><td>TB29</td><td>24V</td><td>TB29</td></tr></table>	TB1	AG100	TB1	TB3	~240V	TB3	TB5	P40	TB5	TB7	P41	TB7	TB9	P42	TB9	TB11	P	TB11	TB13	P44	TB13	TB15	P46	TB15	TB17	NC	TB17	TB19	P48	TB19	TB21	P4A	TB21	TB23	NC	TB23	TB25	P4C	TB25	TB27	P4E	TB27	TB29	24V	TB29
	TB1	AG100	TB1																																															
	TB3	~240V	TB3																																															
	TB5	P40	TB5																																															
	TB7	P41	TB7																																															
	TB9	P42	TB9																																															
	TB11	P	TB11																																															
	TB13	P44	TB13																																															
	TB15	P46	TB15																																															
	TB17	NC	TB17																																															
	TB19	P48	TB19																																															
	TB21	P4A	TB21																																															
	TB23	NC	TB23																																															
	TB25	P4C	TB25																																															
	TB27	P4E	TB27																																															
TB29	24V	TB29																																																
TB4	COM0	TB3	TX																																															
TB6	COM1	TB5	SG																																															
TB8	COM2	TB7	01																																															
TB10	43	TB9	03																																															
TB12	COM3	TB11	05																																															
TB14	45	TB13	07																																															
TB16	47	TB15	09																																															
TB18	COM4	TB17	0B																																															
TB20	49	TB19	0O																																															
TB22	4B	TB21	0F																																															
TB24	COM5	TB23	11																																															
TB26	4D	TB25	13																																															
TB28	4F	TB27	15																																															
TB30	24G	TB29	17																																															

Input wiring

(XBC-DN60SU/XEC-DN60SU)

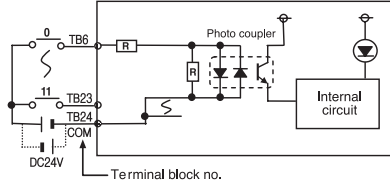Circuit configuration	No.	Contact	No.	Contact	Type																																																																																				
	TB2	485+	TB1	RX	<table><tr><td>TB2</td><td>485+</td><td>RX</td><td>TB1</td></tr><tr><td>TB4</td><td>485-</td><td>TX</td><td>TB3</td></tr><tr><td>TB6</td><td>P00</td><td>SG</td><td>TB5</td></tr><tr><td>TB8</td><td>P02</td><td>P01</td><td>TB7</td></tr><tr><td>TB10</td><td>P04</td><td>P03</td><td>TB9</td></tr><tr><td>TB12</td><td>P06</td><td>P05</td><td>TB11</td></tr><tr><td>TB14</td><td>P08</td><td>P07</td><td>TB13</td></tr><tr><td>TB16</td><td>P0A</td><td>P09</td><td>TB15</td></tr><tr><td>TB18</td><td>P00</td><td>P0B</td><td>TB17</td></tr><tr><td>TB20</td><td>P0E</td><td>P0D</td><td>TB19</td></tr><tr><td>TB22</td><td>P10</td><td>P0F</td><td>TB21</td></tr><tr><td>TB24</td><td>P12</td><td>P11</td><td>TB23</td></tr><tr><td>TB26</td><td>P14</td><td>P13</td><td>TB25</td></tr><tr><td>TB28</td><td>P16</td><td>P15</td><td>TB27</td></tr><tr><td>TB30</td><td>P18</td><td>P17</td><td>TB29</td></tr><tr><td>TB32</td><td>P1A</td><td>P19</td><td>TB31</td></tr><tr><td>TB34</td><td>P1C</td><td>P1B</td><td>TB33</td></tr><tr><td>TB36</td><td>P1E</td><td>P1D</td><td>TB35</td></tr><tr><td>TB38</td><td>P20</td><td>P1F</td><td>TB37</td></tr><tr><td>TB40</td><td>P22</td><td>P21</td><td>TB39</td></tr><tr><td>TB42</td><td>COM</td><td>P23</td><td>TB41</td></tr></table>	TB2	485+	RX	TB1	TB4	485-	TX	TB3	TB6	P00	SG	TB5	TB8	P02	P01	TB7	TB10	P04	P03	TB9	TB12	P06	P05	TB11	TB14	P08	P07	TB13	TB16	P0A	P09	TB15	TB18	P00	P0B	TB17	TB20	P0E	P0D	TB19	TB22	P10	P0F	TB21	TB24	P12	P11	TB23	TB26	P14	P13	TB25	TB28	P16	P15	TB27	TB30	P18	P17	TB29	TB32	P1A	P19	TB31	TB34	P1C	P1B	TB33	TB36	P1E	P1D	TB35	TB38	P20	P1F	TB37	TB40	P22	P21	TB39	TB42	COM	P23	TB41
	TB2	485+	RX	TB1																																																																																					
	TB4	485-	TX	TB3																																																																																					
	TB6	P00	SG	TB5																																																																																					
	TB8	P02	P01	TB7																																																																																					
	TB10	P04	P03	TB9																																																																																					
	TB12	P06	P05	TB11																																																																																					
	TB14	P08	P07	TB13																																																																																					
	TB16	P0A	P09	TB15																																																																																					
	TB18	P00	P0B	TB17																																																																																					
	TB20	P0E	P0D	TB19																																																																																					
	TB22	P10	P0F	TB21																																																																																					
	TB24	P12	P11	TB23																																																																																					
	TB26	P14	P13	TB25																																																																																					
TB28	P16	P15	TB27																																																																																						
TB30	P18	P17	TB29																																																																																						
TB32	P1A	P19	TB31																																																																																						
TB34	P1C	P1B	TB33																																																																																						
TB36	P1E	P1D	TB35																																																																																						
TB38	P20	P1F	TB37																																																																																						
TB40	P22	P21	TB39																																																																																						
TB42	COM	P23	TB41																																																																																						
TB4	485-	TB3	TX																																																																																						
TB6	00	TB5	SG																																																																																						
TB8	02	TB7	01																																																																																						
TB10	04	TB9	03																																																																																						
TB12	06	TB11	05																																																																																						
TB14	08	TB13	07																																																																																						
TB16	0A	TB15	09																																																																																						
TB18	0C	TB17	0B																																																																																						
TB20	0E	TB19	0D																																																																																						
TB22	10	TB21	0F																																																																																						
TB24	12	TB23	11																																																																																						
TB26	14	TB25	13																																																																																						
TB28	16	TB27	15																																																																																						
TB30	18	TB29	17																																																																																						
TB32	1A	TB31	19																																																																																						
TB34	1C	TB33	1B																																																																																						
TB36	1E	TB35	1D																																																																																						
TB38	20	TB37	1F																																																																																						
TB40	22	TB39	21																																																																																						
TB42	COM	TB41	23																																																																																						

Transistor output wiring



(XBC-DN60SU/XEC-DN60SU)

Circuit configuration	No.	Contact	No.	Contact	Type																																																																																				
	TB2	FG	TB1	AG100	<table><tr><td>TB2</td><td>485+</td><td>RX</td><td>TB1</td></tr><tr><td>TB4</td><td>485-</td><td>TX</td><td>TB3</td></tr><tr><td>TB6</td><td>P00</td><td>SG</td><td>TB5</td></tr><tr><td>TB8</td><td>P02</td><td>P01</td><td>TB7</td></tr><tr><td>TB10</td><td>P04</td><td>P03</td><td>TB9</td></tr><tr><td>TB12</td><td>P06</td><td>P05</td><td>TB11</td></tr><tr><td>TB14</td><td>P08</td><td>P07</td><td>TB13</td></tr><tr><td>TB16</td><td>P0A</td><td>P09</td><td>TB15</td></tr><tr><td>TB18</td><td>P00</td><td>P0B</td><td>TB17</td></tr><tr><td>TB20</td><td>P0E</td><td>P0D</td><td>TB19</td></tr><tr><td>TB22</td><td>P10</td><td>P0F</td><td>TB21</td></tr><tr><td>TB24</td><td>P12</td><td>P11</td><td>TB23</td></tr><tr><td>TB26</td><td>P14</td><td>P13</td><td>TB25</td></tr><tr><td>TB28</td><td>P16</td><td>P15</td><td>TB27</td></tr><tr><td>TB30</td><td>P18</td><td>P17</td><td>TB29</td></tr><tr><td>TB32</td><td>P1A</td><td>P19</td><td>TB31</td></tr><tr><td>TB34</td><td>P1C</td><td>P1B</td><td>TB33</td></tr><tr><td>TB36</td><td>P1E</td><td>P1D</td><td>TB35</td></tr><tr><td>TB38</td><td>P20</td><td>P1F</td><td>TB37</td></tr><tr><td>TB40</td><td>P22</td><td>P21</td><td>TB39</td></tr><tr><td>TB42</td><td>COM</td><td>P23</td><td>TB41</td></tr></table>	TB2	485+	RX	TB1	TB4	485-	TX	TB3	TB6	P00	SG	TB5	TB8	P02	P01	TB7	TB10	P04	P03	TB9	TB12	P06	P05	TB11	TB14	P08	P07	TB13	TB16	P0A	P09	TB15	TB18	P00	P0B	TB17	TB20	P0E	P0D	TB19	TB22	P10	P0F	TB21	TB24	P12	P11	TB23	TB26	P14	P13	TB25	TB28	P16	P15	TB27	TB30	P18	P17	TB29	TB32	P1A	P19	TB31	TB34	P1C	P1B	TB33	TB36	P1E	P1D	TB35	TB38	P20	P1F	TB37	TB40	P22	P21	TB39	TB42	COM	P23	TB41
	TB2	485+	RX	TB1																																																																																					
	TB4	485-	TX	TB3																																																																																					
	TB6	P00	SG	TB5																																																																																					
	TB8	P02	P01	TB7																																																																																					
	TB10	P04	P03	TB9																																																																																					
	TB12	P06	P05	TB11																																																																																					
	TB14	P08	P07	TB13																																																																																					
	TB16	P0A	P09	TB15																																																																																					
	TB18	P00	P0B	TB17																																																																																					
	TB20	P0E	P0D	TB19																																																																																					
	TB22	P10	P0F	TB21																																																																																					
	TB24	P12	P11	TB23																																																																																					
	TB26	P14	P13	TB25																																																																																					
TB28	P16	P15	TB27																																																																																						
TB30	P18	P17	TB29																																																																																						
TB32	P1A	P19	TB31																																																																																						
TB34	P1C	P1B	TB33																																																																																						
TB36	P1E	P1D	TB35																																																																																						
TB38	P20	P1F	TB37																																																																																						
TB40	P22	P21	TB39																																																																																						
TB42	COM	P23	TB41																																																																																						
TB4	COM0	TB5	40																																																																																						
TB6	COM1	TB7	41																																																																																						
TB8	COM2	TB9	42																																																																																						
TB10	43	TB11	P																																																																																						
TB12	COM3	TB13	44																																																																																						
TB14	45	TB15	46																																																																																						
TB16	47	TB17	NC																																																																																						
TB18	COM4	TB19	48																																																																																						
TB20	49	TB21	4A																																																																																						
TB22	4B	TB23	NC																																																																																						
TB24	COM5	TB25	4C																																																																																						
TB26	4D	TB27	4E																																																																																						
TB28	4F	TB29	NC																																																																																						
TB30	COM6	TB31	50																																																																																						
TB32	51	TB33	52																																																																																						
TB34	53	TB35	NC																																																																																						
TB36	COM7	TB37	54																																																																																						
TB38	55	TB39	56																																																																																						
TB40	57	TB41	24V																																																																																						
TB42	24G																																																																																								

Standard type



Input wiring

(XBC-DR60SU/ XEC-DR60SU)

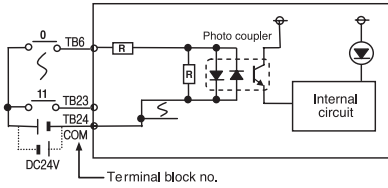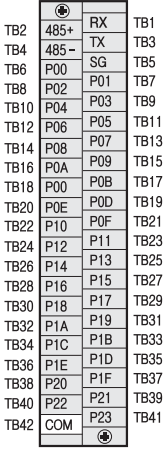Circuit configuration	No.	Contact	No.	Contact	Type
 Terminal block no.	TB2	485+	TB1	RX	
	TB4	485-	TB3	TX	
	TB6	00	TB5	SG	
	TB8	02	TB7	01	
	TB10	04	TB9	03	
	TB12	06	TB11	05	
	TB14	08	TB13	07	
	TB16	0A	TB15	09	
	TB18	0C	TB17	0B	
	TB20	0E	TB19	0D	
	TB22	10	TB21	0F	
	TB24	12	TB23	11	
	TB26	14	TB25	13	
	TB28	16	TB27	15	
	TB30	18	TB29	17	
	TB32	1A	TB31	19	
	TB34	1C	TB33	1B	
	TB36	1E	TB35	1D	
	TB38	20	TB37	1F	
	TB40	22	TB39	21	
	TB42	COM	TB41	23	

Relay output wiring

(XBC-DR60SU/ XEC-DR60SU)

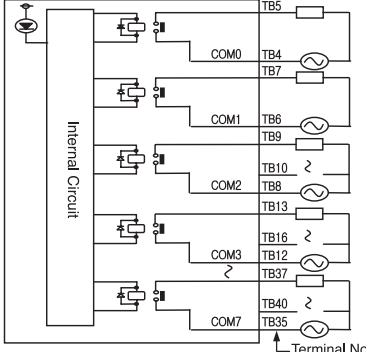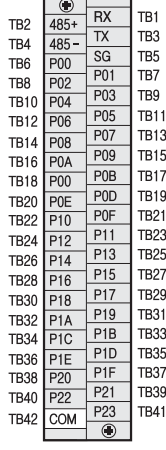Circuit configuration	No.	Contact	No.	Contact	Type
 Terminal No.	TB2	FG	TB1	AG100	
	TB4	COM0	TB3	~240V	
	TB6	COM1	TB5	40	
	TB8	COM2	TB7	41	
	TB10	43	TB9	42	
	TB12	COM3	TB11	P	
	TB14	45	TB13	44	
	TB16	47	TB15	46	
	TB18	COM4	TB17	NC	
	TB20	49	TB19	48	
	TB22	4B	TB21	4A	
	TB24	COM5	TB23	NC	
	TB26	4D	TB25	4C	
	TB28	4F	TB27	4E	
	TB30	COM6	TB29	NC	
	TB32	51	TB31	50	
	TB34	53	TB33	52	
	TB36	COM7	TB35	NC	
	TB38	55	TB37	54	
	TB40	57	TB39	56	
	TB42	24G	TB41	24V	

Economic type

Input wiring (XBC-DR10E)

Circuit configuration		No.	Contact	No.	Contact	Type			
Terminal block no.		TB2	485+	TB1	RX	TB1 TB3 TB5 TB7 TB9 TB11 TB13			
		TB4	485-	TB3	TX		TB2	485+	TB3
		TB6	00	TB5	SG		TB4	485-	TB5
		TB8	02	TB7	01		TB6	P00	TB7
		TB10	04	TB9	03		TB8	P02	TB9
		TB12	NC	TB11	05		TB10	P04	TB11
		TB14	COM	TB13	NC		TB12	NC	TB13
		Terminal block no.							

Relay output wiring (XBC-DR10E)

Circuit configuration	No.	Contact	No.	Contact	Type			
Internal circuit Terminal no.	TB2	FG	TB1	AC100 ~240V	TB2	FG	AC100 ~240V	TB1
	TB4	COM0	TB3	40	TB4	COM 0	P40	TB3
	TB6	COM1	TB5	41	TB6	COM 1	P41	TB5
	TB8	COM2	TB7	42	TB8	COM 2	P42	TB7
	TB10	43	TB9	42	TB10	P43	NC	TB9
	TB12	NC	TB11	NC	TB12	NC	24V	TB11
	TB14	24G	TB13	24V	TB14	24G	+	TB13

Input wiring (XBC-DR14E)

Circuit configuration		No.	Contact	No.	Contact	Type		
Terminal block no.		TB2	485+	TB1	RX	TB1 TB3 TB5 TB7 TB9 TB11 TB13		
		TB4	485-	TB3	TX			
		TB6	00	TB5	SG			
		TB8	02	TB7	01			
		TB10	04	TB9	03			
		TB12	06	TB11	05			
		TB14	08	TB13	07			
		Terminal block no.						

Relay output wiring (XBC-DR14E)

Circuit configuration	No.	Contact	No.	Contact	Type			
Terminal no.	TB2	FG	TB1	AC100 ~240V	TB1 TB3 TB5 TB7 TB9 TB11 TB13			
	TB4	COM0	TB3	40		TB2	FG	AC100 ~240V
	TB6	COM1	TB5	41		TB4	COM0	P40
	TB8	COM2	TB7	42		TB6	COM1	P41
	TB10	43	TB9	42		TB8	COM2	P42
	TB12	NC	TB11	NC		TB10	P43	NC
	TB14	24G	TB13	24V		TB12	NC	24V
						TB14	24G	

Input wiring (XBC-DR20E)

Circuit configuration		No.	Contact	No.	Contact	Type				
Terminal block no.		TB2	485+	TB1	RX	TB1 TB3 TB5 TB7 TB9 TB11 TB13 TB15 TB17 TB19 TB21 TB23				
		TB4	485-	TB3	TX		TB2	485 +	RX	TB3
		TB6	00	TB5	SG		TB4	485 -	TX	TB5
		TB8	02	TB7	01		TB6	P00	SG	TB7
		TB10	04	TB9	03		TB8	P02	P01	TB9
		TB12	06	TB11	05		TB10	P04	P03	TB11
		TB14	08	TB13	07		TB12	P06	P05	TB13
		TB16	0A	TB15	09		TB14	P08	P07	TB15
		TB18	NC	TB17	0B		TB16	P0A	P08	TB17
		TB20	NC	TB19	NC		TB18	NC	NC	TB19
		TB22	NC	TB21	NC		TB20	NC	NC	TB21
		TB24	COM	TB23	NC		TB22	NC	NC	TB23
							TB24	COM	NC	

Economic type

Relay output wiring (XBC-DR20E)

Circuit configuration	No.	Contact	No.	Contact	Type
	TB2	FG	TB1	AC100	
	TB4	COM0	TB3	~240V	
	TB6	COM1	TB5	40	
	TB8	COM2	TB7	41	
	TB10	43	TB9	42	
	TB12	COM3	TB11	NC	
	TB14	45	TB13	44	
	TB16	47	TB15	46	
	TB18	COM4	TB17	NC	
	TB20	49	TB19	48	
	TB22	4B	TB21	4A	
	TB24	24G	TB23	24V	

Input wiring (XBC-DR30E)

Circuit configuration	No.	Contact	No.	Contact	Type
	TB2	485+	TB1	RX	
	TB4	485-	TB3	TX	
	TB6	00	TB5	SG	
	TB8	02	TB7	01	
	TB10	04	TB9	03	
	TB12	06	TB11	05	
	TB14	08	TB13	07	
	TB16	0A	TB15	09	
	TB18	0C	TB17	0B	
	TB20	0E	TB19	0D	
	TB22	10	TB21	0F	
	TB24	COM	TB23	11	

Relay output wiring (XBC-DR30E)

Circuit configuration	No.	Contact	No.	Contact	Type
	TB2	FG	TB1	AC100	
	TB4	COM0	TB3	~240V	
	TB6	COM1	TB5	40	
	TB8	COM2	TB7	41	
	TB10	43	TB9	42	
	TB12	COM3	TB11	NC	
	TB14	45	TB13	44	
	TB16	47	TB15	46	
	TB18	COM4	TB17	NC	
	TB20	49	TB19	48	
	TB22	4B	TB21	4A	
	TB24	24G	TB23	24V	

Standard type

Input wiring (XBM-DR16S)

Circuit configuration	No.	Contact	Type
	TB1	00	
	TB2	01	
	TB3	02	
	TB4	03	
	TB5	04	
	TB6	05	
	TB7	06	
	TB8	07	
	TB9	COM	

Relay output wiring (XBM-DR16S)

Circuit configuration	No.	Contact	Type
	TB1	20	
	TB2	21	
	TB3	22	
	TB4	23	
	TB5	24	
	TB6	25	
	TB7	26	
	TB8	27	
	TB9	COM	

Input wiring (XBM-DN16S)

Circuit configuration	No.	Contact	No.	Contact	Type
	B10	00	A10	NC	
	B09	01	A09	NC	
	B08	02	A08	NC	
	B07	03	A07	NC	
	B06	04	A06	NC	
	B05	05	A05	NC	
	B04	06	A04	NC	
	B03	07	A03	NC	
	B02	COM	A02	NC	
	B01	COM	A01	NC	

Standard type

Transistor output wiring (XBM-DN16S)

Circuit configuration	No.	Contact	Type
	B10	20	
	B09	21	
	B08	22	
	B07	23	
	B06	24	
	B05	25	
	B04	26	
	B03	27	
	B02	DC12/	
	B01	24V	
	A10	NC	
	A09	NC	
	A08	NC	
	A07	NC	
	A06	NC	
	A05	NC	
	A04	NC	
	A03	NC	
	A02	COM	
	A01	COM	

Input wiring (XBM-DN32S)

Circuit configuration	No.	Contact	No.	Contact	Type
	B10	00	A10	08	
	B09	01	A09	09	
	B08	02	A08	0A	
	B07	03	A07	0B	
	B06	04	A06	0C	
	B05	05	A05	0D	
	B04	06	A04	0E	
	B03	07	A03	0F	
	B02	COM	A02	COM	
	B01	COM	A01	COM	

Transistor output wiring (XBM-DN32S)

Circuit configuration	No.	Contact	Type
	B10	20	
	B09	21	
	B08	22	
	B07	23	
	B06	24	
	B05	25	
	B04	26	
	B03	27	
	B02	DC12/	
	B01	24V	
	A10	28	
	A09	29	
	A08	2A	
	A07	2B	
	A06	2C	
	A05	2D	
	A04	2E	
	A03	2F	
	A02	COM	
	A01	COM	

Built-in functions | High-speed counter

Programmable Logic Controller

Standard type

Performance specifications

Classification		Description			
		Block type unit			Modular type
		H-type	SU-type	E-type	S-type
Count input Signal	Signal	A-phase, B-phase			
	Input type	Voltage input (Open collector)			
	Signal level	DC 24V			
Max. count speed		100kpps	100kpps	4kpps	20kpps
Number of channels	1 phase	100kpps 4ch / 20kpps 4ch	100kpps 2ch / 20kpps 6ch	4kpps 4ch	20kpps 4ch
	2 phase	50kpps 2ch / 10kpps 2ch	50kpps 1ch	2kpps 2ch	2 multiplication: 10kpps
		50kpps 2ch / 8kpps 2ch	8kpps 3ch		4 multiplication: 8kpps
Count range		Signed 32bit (-2,147,483,648 ~ 2,147,483,647)			
Count mode (Program setting)		Linear count (If 32bit range exceeded, Carry / Borrow occurs)			
		Ring count (Repeated count within setting range)			
Input mode (Program setting)		1-phase input			
		2-phase input			
		CW/CCW input			
Signal type		Voltage			
Up/Down setting	1 phase input	Increasing / Decreasing operation setting by B-phase input			
		Increasing / Decreasing operation setting by program			
	2 phase input	Automatic setting by difference in phase			
		CW/CCW	A-phase input: increasing operation		
B-phase input: decreasing operation					
Multiplication function	1 phase input	1 multiplication			
	2 phase input	4 multiplication			
	CW/CCW	1 multiplication			
Control input	Signal	Preset instruction input			
	Signal level	DC 24V input type			
	Signal type	Voltage			
External output	Output points	2 point / channel (for each channel): output contact point of basic unit available		1 point / channel (for each channel): output contact point of basic unit available	
	Type	Select program setting, signal-compared (>, >=, =, <=, <) or section compared output (Included or excluded)			
	Output type	Relay, Open-collector output (Sink)			
Count enable		To be set through program			
Preset function		To be set through terminal (contact) or program			
Auxiliary mode		Count latch			

Input specification

Item	Description
Input voltage	24V DC (20.4V ~ 28.8V)
Input current	4mA
On voltage (min.)	20.4V
Off voltage (max.)	6V

Parts designation | Block type unit

High performance type

(XBC-H)

Terminal No.	Name		Usage	
	1-phase	2-Phase	1-phase	2-Phase
P000	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
P001	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
P002	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
P003	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
P004	Ch4 counter input	Ch4 A-phase input	Counter input terminal	A-phase input
P005	Ch5 counter input	Ch4 B-phase input	Counter input terminal	B-phase input
P006	Ch6 counter input	Ch6 A-phase input	Counter input terminal	A-phase input
P007	Ch7 counter input	Ch6 B-phase input	Counter input terminal	B-phase input
P008	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
P009	Ch1 preset 24V	-	Preset input terminal	No use
P00A	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
P00B	Ch4 preset 24V	-	Preset input terminal	No use
P00C	Ch5 preset 24V	Ch4 preset 24V	Preset input terminal	Preset input terminal
P00D	Ch6 preset 24V	-	Preset input terminal	No use
P00E	Ch7 preset 24V	Ch6 preset 24V	Preset input terminal	Preset input terminal
P00F	Ch8 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Input common	Input common

High performance type

(XEC-H)

Terminal No.	Name		Usage	
	1-phase	2-Phase	1-phase	2-Phase
IX0.0.0	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
IX0.0.1	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
IX0.0.2	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
IX0.0.3	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
IX0.0.4	Ch4 counter input	Ch4 A-phase input	Counter input terminal	A-phase input
IX0.0.5	Ch5 counter input	Ch4 B-phase input	Counter input terminal	B-phase input
IX0.0.6	Ch6 counter input	Ch6 A-phase input	Counter input terminal	A-phase input
IX0.0.7	Ch7 counter input	Ch6 B-phase input	Counter input terminal	B-phase input
IX0.0.8	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
IX0.0.9	Ch1 preset 24V	-	Preset input terminal	No use
IX0.0.10	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
IX0.0.11	Ch4 preset 24V	-	Preset input terminal	No use
IX0.0.12	Ch5 preset 24V	Ch4 preset 24V	Preset input terminal	Preset input terminal
IX0.0.13	Ch6 preset 24V	-	Preset input terminal	No use
IX0.0.14	Ch7 preset 24V	Ch6 preset 24V	Preset input terminal	Preset input terminal
IX0.0.15	Ch8 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Input common	Input common

Standard type

Terminal No.	Name		Usage	
	1-phase	2-Phase	1-phase	2-Phase
P000	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
P001	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
P002	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
P003	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
P004	Ch4 counter input	Ch4 A-phase input	Counter input terminal	A-phase input
P005	Ch5 counter input	Ch4 B-phase input	Counter input terminal	B-phase input
P006	Ch6 counter input	Ch6 A-phase input	Counter input terminal	A-phase input
P007	Ch7 counter input	Ch6 B-phase input	Counter input terminal	B-phase input
P008	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
P009	Ch1 preset 24V	-	Preset input terminal	No use
P00A	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
P00B	Ch4 preset 24V	-	Preset input terminal	No use
P00C	Ch5 preset 24V	Ch4 preset 24V	Preset input terminal	Preset input terminal
P00D	Ch6 preset 24V	-	Preset input terminal	No use
P00E	Ch7 preset 24V	Ch6 preset 24V	Preset input terminal	Preset input terminal
P00F	Ch8 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Input common	Input common

Economic type



Terminal No.	Name		Usage	
	1-phase	2-Phase	1-phase	2-Phase
P000	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
P001	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
P002	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
P003	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
P004	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
P005	Ch1 preset 24V	-	Preset input terminal	No use
P006	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
P007	Ch4 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Common terminal	Common terminal

Parts designation | Modular type unit

Standard type

Terminal No.	Name		Usage	
	1-phase	2-Phase	1-phase	2-Phase
P000	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
P001	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
P002	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
P003	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
P004	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
P005	Ch1 preset 24V	-	Preset input terminal	No use
P006	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
P007	Ch3 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Common terminal	Common terminal

Wiring

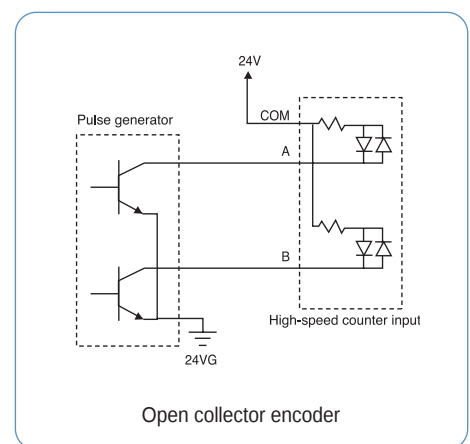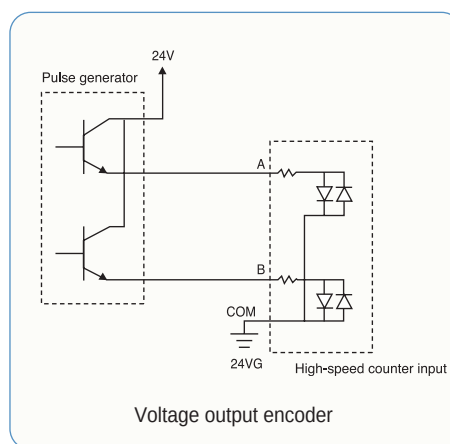

Parts designation | Block type unit

Performance specification

Classification		Description		
		Block type unit		Modular type
		H-type	SU-type	S-type
No. of control axis		2 axis		
Interpolation		2-axis linear interpolation		
Control mode		Position control, Speed control, Speed / Position switching control, Position / Speed switching control		
Control unit		Pulse		
Positioning data		30-step pattern for each axis (XBC: 80step) (operation step number : 1~ 30, XBC : 1~ 80)		
Positioning monitor		Dedicated monitoring function for positioning in XG5000		
Back-up		Permanent backup of downloaded parameter (FLASH memory)		
		2-month Super Cap.backup of parameter / Data modified during operation(XBM) battery back-up (XBC)		
		Permanent backup of parameter / Data in RAM by instruction (FLASH memory)		
Positioning	Positioning method	Absolute / incremental method		
	Positioning range	-2,147,483,648 ~ 2,147,483,647		
	Speed range	1 ~ 100,000 (pulse/sec)		
	Acceleration / Deceleration type	Trapezoidal acceleration / Deceleration		
	Acceleration / Deceleration time	1 ~ 10,000ms (4 patterns each can be set)		
Max. output pulse		100 Kpps		
Max. distance of connection		2m		

※ Economic block type unit (E-type) dose not support built-in positioning functions

Electrical specification

Output	Signal	Rated input voltage	Load voltage range	Max. load current /Inrush current	Max. voltage drop (On)	Leakage current (Off)	Response time
	Output pulse	DC 5~24V	DC 4.75~26.4V	100mA(1 point) 1A/10ms or less	DC 0.3V or less	0.1mA or less	100μs or less
Input	Signal	Rated input voltage/ Current	Load voltage range	On voltage / Current	Off voltage / Current	Input resistance	Response time
	External high limit	DC 24V/7mA	DC 20.4 ~ 28.8V	DC 19V/5.7mA or more	DC 6V/1.8mA or less	3.3Ω	0.5ms or less
	External low limit						
	Approximate zero	DC 24V/4mA		DC 19V/3.4mA or more	DC 6V/1.1mA or less	5.6Ω	
zero							



I/O specifications | Block type unit

High performance type

(XBC-H/XEC-H)

Item	XBC pin number (XEC pin number)		Signal name		Direction of positioning signal to external	Operating condition
	X axis	Y axis				
Input	P00008 (%IX0.0.8)	P0000A (%IX0.0.10)	Limit L	Low limit	←	4mA / 24V
	P00009 (%IX0.0.9)	P0000B (%IX0.0.11)	Limit H	High limit	←	
	P0000C (%IX0.0.12)	P0000E (%IX0.0.14)	DOG	Near point	←	
	P0000D (%IX0.0.13)	P0000F (%IX0.0.15)	Origin	Zero signal (+24V)	←	
	COM		Input COM	Common	←	
Output	P00020 (%QX0.0.0)	P00021 (%QX0.0.1)	Pulse	Pulse/CW (Open collector)	→	DC 12~24V
	P00022 (%QX0.0.2)	P00023 (%QX0.0.3)	Direction	Direction/CCW (Open collector)	→	
	P		DC 12V~24V	External power supply	→	
	COM 0 ~ 3		Output COM	External 24V GND	→	

Standard type

(XBC-S(U))

Item	XBC pin number		Signal name		Direction of positioning signal to external	Operating condition
	X axis	Y axis				
Input	P00008 (%IX0.0.8)	P0000A (%IX0.0.10)	Limit L	Low limit	←	4mA / 24V
	P00009 (%IX0.0.9)	P0000B (%IX0.0.11)	Limit H	High limit	←	
	P0000C (%IX0.0.12)	P0000E (%IX0.0.14)	DOG	Near point	←	
	P0000D (%IX0.0.13)	P0000F (%IX0.0.15)	Origin	Zero signal (+24V)	←	
	COM		Input COM	Common	←	
Output	P00040 (%QX0.0.0)	P00041 (%QX0.0.1)	Pulse	Pulse/CW (Open collector)	→	DC 12~24V
	P00042 (%QX0.0.2)	P00043 (%QX0.0.3)	Direction	Direction/CCW (Open collector)	→	
	P		DC 12V~24V	External power supply	→	
	COM 0~3		Output COM	External 24V GND	→	

I/O specifications | Modular type unit

Standard type

Item	XBM pin number		Signal name		Direction of positioning signal to external	Operating condition
	X axis	Y axis				
Input	P00000	P00002	Limit L	Low limit	←	Edge
	P00001	P00003	Limit H	High limit	←	Edge
	P00004	P00006	DOG	Near point	←	Edge
	P00005	P00007	Origin	Zero signal (+24V)	←	Edge
	COM		Input COM	Common	←	-
Output	P00020	P00021	Pulse	Pulse/CW (Open collector)	→	-
	P00022	P00023	Direction	Direction/CCW (Open collector)	→	-
	12/24V		DC 12/24V	External power supply	→	-
	COM		Output COM	External 24V GND	→	-

I/O specifications | Block type unit

Performance specification


(PID)

Classification		Description		
		Block type unit		Modular type
		H - type	SU - type	S - type
No. of control loop		16-loop independent control		
Control mode		P control, PI control, PD control, PID control		
Control period		10ms ~ 6,553.5ms (Setting unit: 0.1ms)		
Function	Forward / Reverse Mixed control	Switching control direction automatically when exceeding dead band		
	Cascade	Improved control precision by serial connection between master loop and slave loop		
	SV Ramp	Preventing overload caused by excessive SV change by setting variation slope		
	Alarm	Improved control stability with various alarm function such as MV high limit / Low limit, PV high limit/low limit, PV variation width		
	Auto tuning	Auto tuning with improved auto-tuning algorithm		
	Additional function	PWM output, PV Tracking, Δ MV, Δ PV, etc		

※ Economic block type unit (E-type) dose not support built-in PID functions

Pulse catch


When On-condition time of input signal is shorter than 1 scan time (Min. 50 μ s), Pulse catch processes the input signal as normal input.

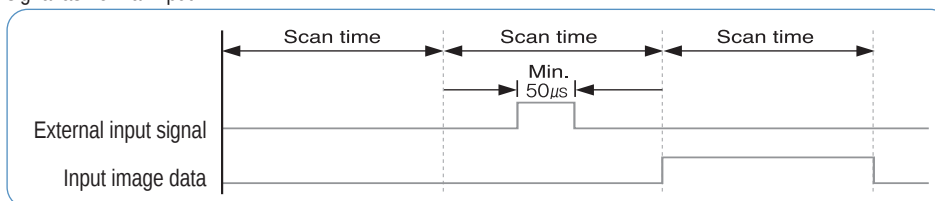

Item	Description			
	Block type unit			Modular type
	H - type	SU - type	E - type	S - type
Pulse catch	10 μ s: 4 points (P00000~P00003)	10 μ s: 2 points (P00000~P00001)	50 μ s: 4 points (P00000~P00003)	50 μ s: 8 points (P00000~P00007)
	50 μ s: 4 points (P00004~P00007)	50 μ s: 6 points (P00002~P00007)		

Input filter

Input filter prevents processing of the input signal that is shorter than the filtering time. (Filtering time is set by parameter) In the application site where noise is frequently generated, input filter prevents wrong input caused by noise.

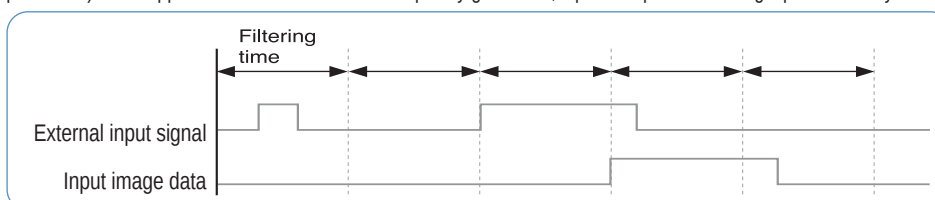

Classification	Description			
	Block type unit			Modular type
	H - type	SU - type	E - type	S - type
No. of setting points	Every input contact			
Input filtering time setting	Assigning for each module			
Setting range	1 ~ 100ms (1, 3, 5, 10, 20, 70, 100)			

Task

Task function is the processing method of internal/external signal generated periodically or aperiodically. It stops operation of scan program for the moment and then execute the assigned task.

Classification	Description			
	Block type unit			Modular type
	H - type	SU - type	E - type	S - type
Initial task	1(_INT)			
Cyclic task	8			
I/O task	8	8	4	8
Internal device task	8			
External interrupt	10 μ s: 4 points (P00000~P00003) 50 μ s: 4 points (P00004~P00007)	10 μ s: 2 points (P00000~P00001) 50 μ s: 6 points (P00002~P00007)	50 μ s: 4 points (P00000~P00003)	50 μ s: 8 points (P00000~P00007)


RTC

RTC function is for time management of system and error log. RTC function is executed steadily when power is off or instantaneous power cut status. Current time of RTC is renewed every scan by system operation status information flag.

Classification	Description			
	Block type unit			Modular type
	H - type	SU - type	E - type	S - type
RTC	Built-in	Option module	Option module	Not available




Specification

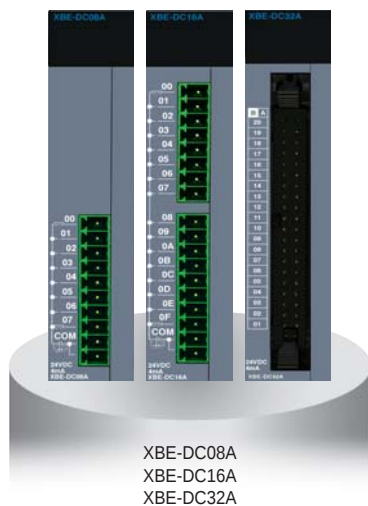


Specification	Model	XBE-DC08A	XBE-DC16A	XBE-DC32A
Input point		8 points	16 points	32 points
Rated input voltage / current		DC 24V / 4mA		
Operation voltage range		DC 20.4 ~ 28.8V (Ripple rate < 5%)		
Input resistance		5.6kΩ		
Response time	Off → On	1 / 3 / 5 / 10 / 20 / 70 / 100ms (setting by CPU parameter) Initial value: 3ms		
	On → Off			
Insulation pressure		AC 560Vrms / 3 Cycle (altitude 2000m)		
Insulation resistance		10MΩ or more by megger		
COMMON method		8 points / COM	16 points / COM	32 points / COM
Internal current consumption		30mA	40mA	50mA

Wiring

(XBE-DC08A / DC16A)

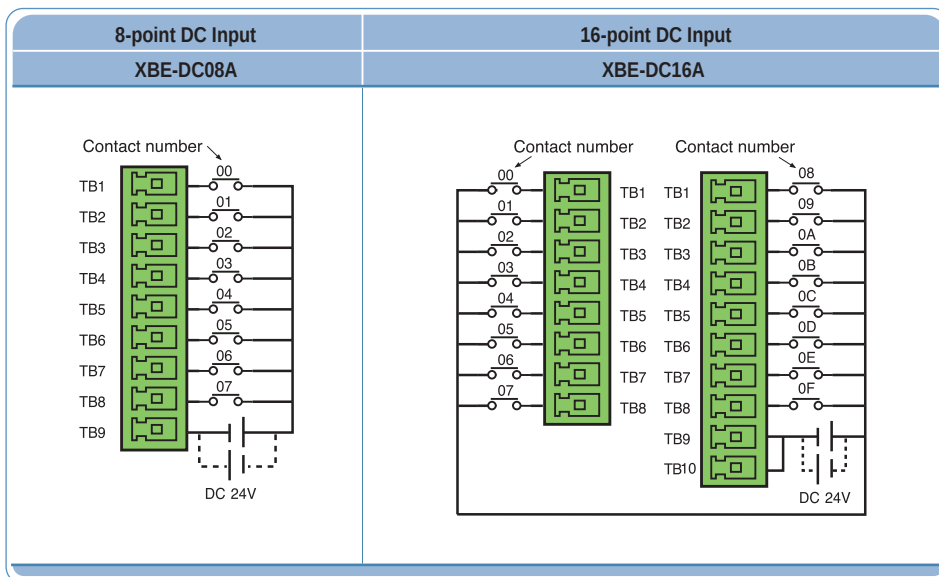


Specification

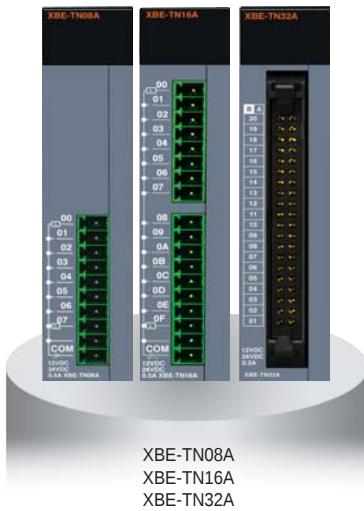

Specification		Model	XBE-TN08A	XBE-TP08A	XBE-TN16A	XBE-TP16A	XBE-TN32A	XBE-TP32A
Type			Sink	Source	Sink	Source	Sink	Source
Output point			8 point		16 point		32 point	
Rated load voltage			DC 12 / 24V					
Load voltage range			DC 10.2 ~ 26.4 V					
Max. load current			0.2A / 1point		0.2A / 1point, 2A / COM			
Off leakage current			0.1mA or less					
Max. voltage drop (On)			DC 0.4V					
Response time	Off → On	1mA or less						
	On → Off	1mA or less (Rated load, resistive load)						
Common method			8 points / COM		16 points / COM		32 points / COM	
Internal current consumption			40mA		60mA		120mA	
External power supply	Voltage	DC 12 / 24V ± 10% (Ripple voltage ≤ 4 Vp-p)						
	Current	10mA or less (DC 24V connection)					20mA or less (DC 24V connection)	

Wiring

(XBE-TN08A / TN16A)

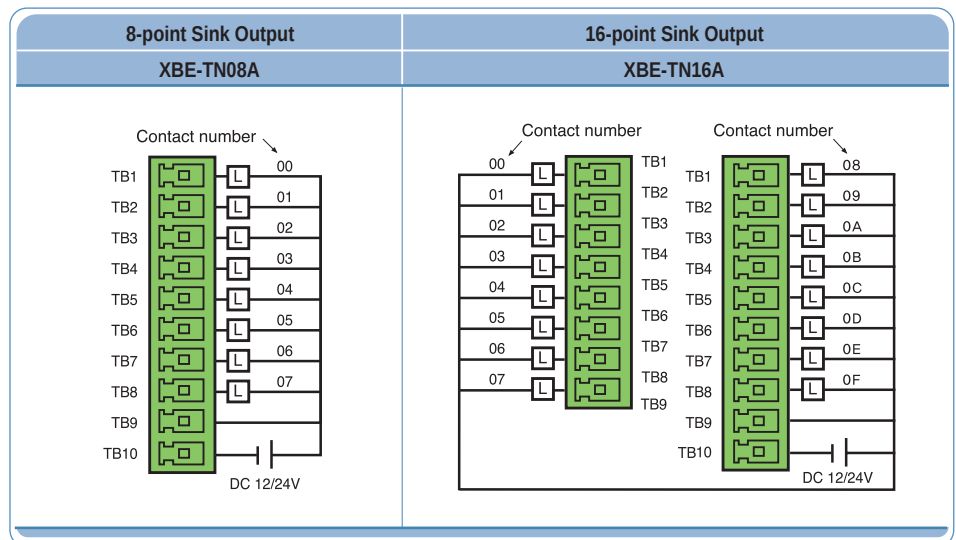


Specification




Model		XBE-RY08A	XBE-RY16A
Specification			
Output point		8 points	16 points
Insulation method		Relay insulation	
Rated input voltage / Current		DC 24V 2A (resistive load) / AC 220V 2A (COS ψ = 1), 5A /COM	
Min. load voltage / Current		DC 5V 1mA	
Max. load voltage		AC 250V, DC 125V	
Off leakage current		0.1mA (AC 220V, 60Hz)	
Max. on / Off frequency		3,600 times / hr	
Surge absorber		None	
Service life	Mechanical	20million times or more	
	Electrical	Rated load voltage / Current 100,000 times or more	
		AC 200V / 1.5A, AC 240V / 1A (COS ψ = 0.7) 100,000 times or more	
		AC 200V / 1A, AC 240V / 0.5 (COS ψ = 0.35) 100,000 tiems or more	
		DC 24V / 1A, DC 100V / 0.1A (L / R = 7ms) 100,000 times or more	
Response time	Off → On	10ms or less	
	On → Off	12ms or less	
COMMON method		8 points / 1COM	
Internal current consumption		230mA	420mA
Operation indicator		Output On, LED On	
External connection method		9-pin terminal block connector	9-pin terminal block connector × 2

Wiring

(XBE-RY08A / RY16A)

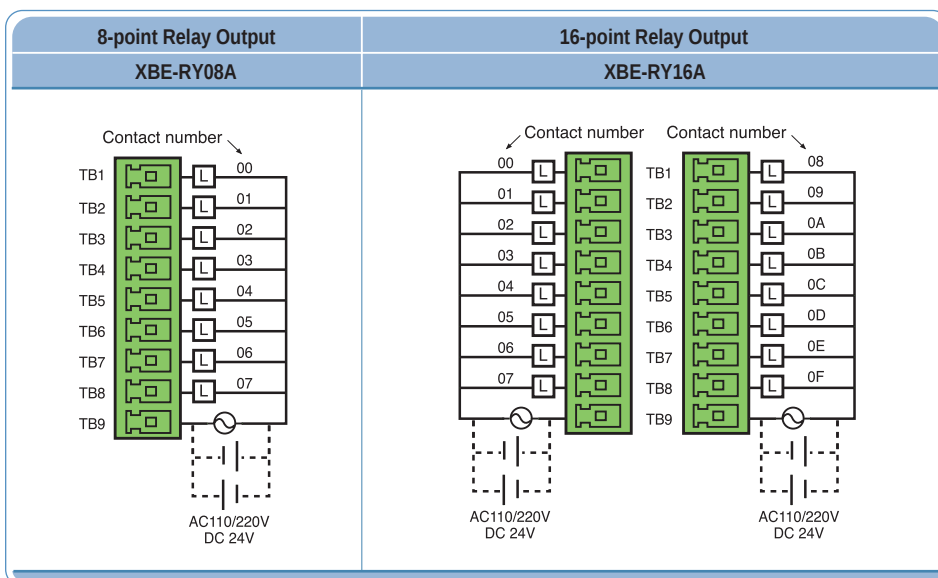

DC Input specification

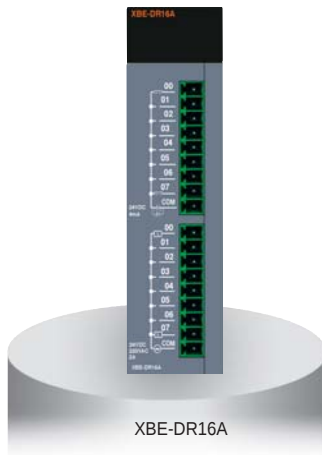


Relay output specification


Specification	Model	DC Input (XBE-DR16A)
Input point		8 points
Insulation method		Photocoupler
Rated input voltage		DC 24V
Rated input current		4mA
Operation voltage range		DC 20.4 ~ 28.8V (Ripple rate < 5%)
On voltage / On current		DC 19V or more / 3mA or more
Off voltage / Off current		DC 6V or less / 1mA or less
Input resistance		5.6kΩ
Response time	Off → On On → Off	1 / 3 / 5 / 10 / 20 / 70 / 100ms (setting by CPU parameter) init value: 3ms
COMMON method		8 points / COM
Weight		81g

Specification	Model	Relay Output (XBE-DR16A)
Output point		8 points
Insulation method		Relay insulation
Rated input voltage / Current		DC 24V 2A (resistive load) / AC 220V 2A (COS ψ = 1), 5A /COM
Min. load voltage / Current		DC 5V 1mA
Max. load voltage		AC 250V, DC 125V
Off leakage current		0.1mA (AC 220V, 60Hz)
Max. on / Off frequency		3,600 times / hr
Surge absorber		None
Service life	Mechanical	20million times or more
	Electrical	Rated load voltage / Current 100,000 times or more
		AC 200V / 1.5A, AC 240V / 1A (COS ψ = 0.7) 100,000 times or more
		AC 200V / 1A, AC 240V / 0.5 (COS ψ = 0.35) 100,000 tiems or more
Response time	Off → On	10ms or less
	On → Off	12ms or less
COMMON method		8 points / 1COM
Internal current consumption		250mA
Operation indicator		Output On, LED On
External connection method		9-pin terminal block connector

Wiring (XBE-DR16A)

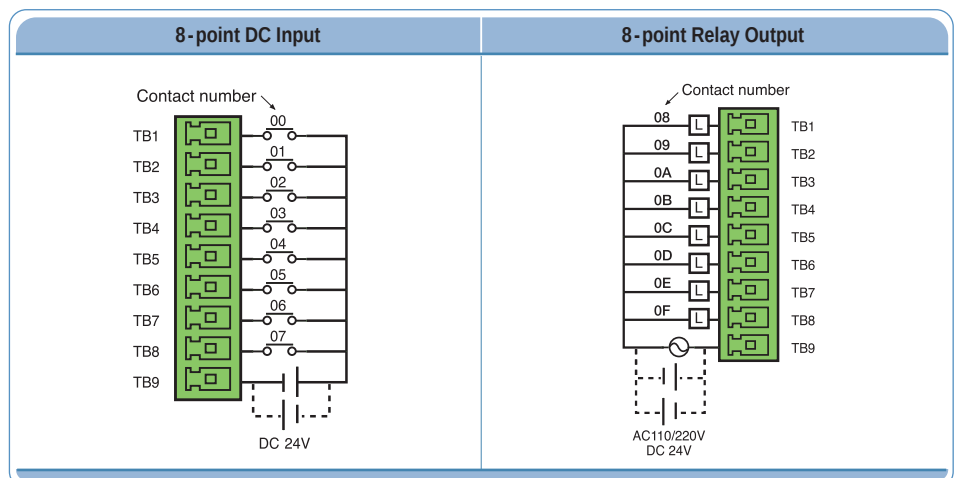

Specification

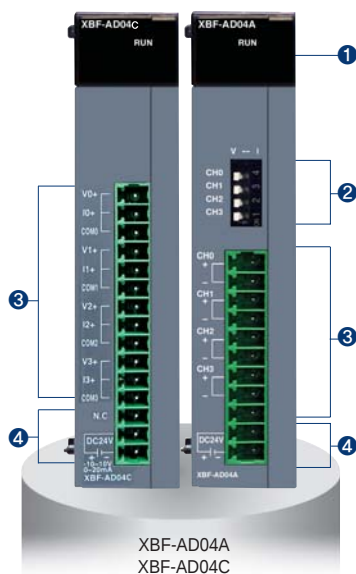


Item		XBF-AD04A		XBF-AD04C		XBF-AD08A		
Analog range	Item	Voltage	Current	Voltage	Current	Voltage	Current	
	Range	DC 0~10V (input resistance : 1MΩ min.)	DC 4~20mA, DC 0~20mA (input resistance: 250Ω)	DC 1 ~ 5V DC 0 ~ 5V DC 0 ~ 10V DC -10 ~ 10V (Input resistance : 1MΩ min)	DC 4 ~ 20mA DC 0 ~ 20mA (Input resistance : 250MΩ)	DC 1~5V DC 0~5V DC 0~10V (Input resistance : 250MΩ)	DC 4~20mA, DC 0~20mA (input resistance: 250Ω)	
	Type	12bit binary data		16bit binary data (Data : 14bit)		12bit binary data		
Digital output	Range	Unsigned value	0~4000		0 ~ 16000		0~4000	
		Signed value	-2000~2000		-8000~8000		-2000~2000	
		Precise value	0~1000	4000~2000/ 0~2000	100~5000 (1~5V) 0~5000 (0~5V) 0~10000 (0~5V) -10000~10000(±10V)	4000~20000 (4~20mA) 0~20000 (0~20mA)	100~500 (DC1~5V) 0~500 (DC0~5V) 0~1000 (DC0~10V)	4000~2000 (DC 4~20mA) 0~2000 (DC 0~20mA)
		Percentile value	0~1000		0~10000		0~1000	
Resolution		2.5mV (1/4000)	5μA (1/4000)	1/16000		1.25mV (DC 1~5V, 0~5V) 2.5mV (DC 0~10V)	5μA (DC 4~20mA, 0~20mA)	
				0.250mV(1~5V) 0.3125mV(0~5V) 0.625mV(0~10V) 1.250mV(±10V)	1.0μA(4~20mA) 1.25μA(0~20mA)			
Max. conversion speed		1.5ms / channel		1ms / channel		1.5ms / channel		
Max. absolute input		±15V	±25mA	DC±15V	DC±3mA	±15V	±25mA	
Analog Input channels		4 channel/module		4 channel/module		8 channel/module		
Insulation method		Photocoupler insulation between I/O terminal and power supply		Photo-coupler insulation between input terminal and PLC power (No insulation between channels)		Photocoupler insulation between I/O terminal and power supply		
Connection terminal		11-point terminal block		15-point terminal block		11-point terminal block		
Occupied I/O points		Fixed type : 64 points						
Current consumption	DC 5V	120mA		110mA		105mA		
	DC 24V	62mA		100mA		85mA		

Names and Functions


No.	Name	Descriptions
①	RUN LED	- Indicates condition of module - LED On: Normal condition - LED On and Off: Flickering - LED Off: Power Off or module malfunction
②	Input selection S/W	- Voltage/Current selection switch - V: Voltage input selection - I: Current input selection
③	Terminal block	External device connection
④	External power supply terminal	External DC 24V input

Wiring

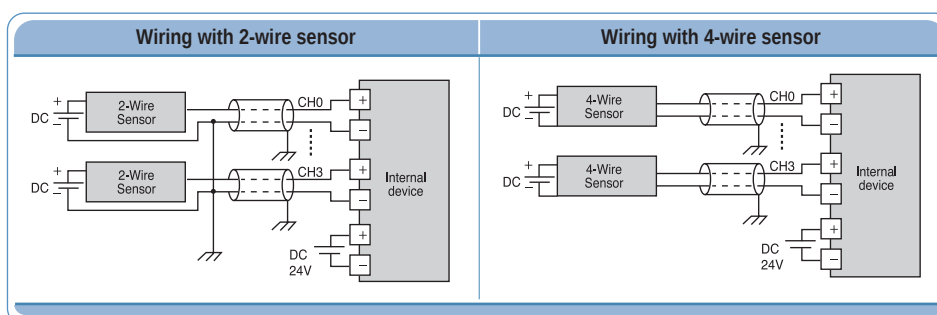

※ Use 22AWG, 2 conductor, twist shielded cable when wiring between analog module and external device.

Specification

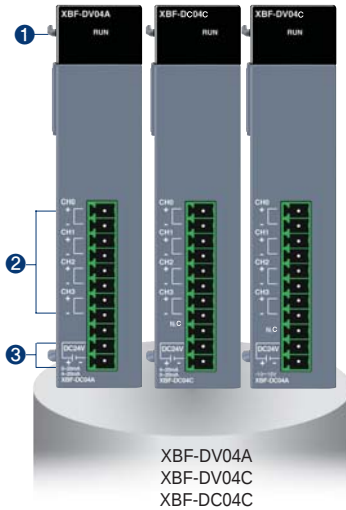


Item	XBF-DV04A	XBF-DV04C	XBF-DC04C	XBF-DC04A
Analog range	DC 0 ~ 10 V (Load resistance $\geq 2k\Omega$)	DC 1 ~ 5V DC 0 ~ 5V DC 0 ~ 10V DC -10 ~ 10V (Input resistance : $1k\Omega$ or more)	DC 4 ~ 20mA DC 0 ~ 20mA (Input resistance : $600M\Omega$ or less)	4 ~ 20mA / 0 ~ 20mA (Load resistance $\leq 510\Omega$)
Analog range Selection	-	-	-	XG 5000 I/O parameter
Digital data	Output range	0 ~ 10 V	-	4 ~ 20mA / 0 ~ 20mA
	Unsigned value	0 ~ 4000	0 ~ 16000	0 ~ 4000
	Signed value	- 2000 ~ 2000	- 8000 ~ 8000	- 2000 ~ 2000
	Precise value	0 ~ 1000	1000~5000(1~5V) 0~5000(0~5V) 0~10000(0~10V) -1000~10000($\pm 10V$)	4000~20000(4~20mA) 0~20000(0~20mA)
	Percentile value	0~1000	0~10000	0~1000
Data format	Data format of digital input is set by user program or I/O parameter (Setting for each channel is available.)			
Resolution	Resolution (1/4000)	1/1600	Resolution (1/4000)	Resolution (1/4000)
	2.5mV	0.250m(1~5V) 0.3125m(0~5V) 0.625m(0~10V) 1.250m($\pm 10V$)	1.0 μ A(4~20mA) 1.25 μ A(0~20mA)	5 μ A
Max. conversion speed	1ms / channel	1ms / channel	1ms / channel	1ms / channel
Max. absolute output	$\pm 15V$	-	-	$\pm 25mA$
Accuracy	$\pm 0.5\%$ or less	-	-	$\pm 0.5\%$ or less
Analog output channels	4 channel / module	4 channel / module	4 channel / module	4 channel / module
Insulation method	Photocoupler insulation between I/O terminal and power supply	Photo-coupler insulation between output terminal and PLC power (no insulation between channels)	Photocoupler insulation between I/O terminal and power supply	Photocoupler insulation between I/O terminal and power supply
Connection terminal	11-point terminal block			
Occupied I/O points	Fixed type: 64 points			
Current consumption	DC 5V	110mA	75mA	110mA
	DC 24V	70mA	170mA	120mA


Names and Functions

No.	Name	Descriptions
①	RUN LED	- Indicates condition of module - LED On: Normal condition - LED On and Off: Flickering - LED Off: Power Off or module malfunction
②	Terminal block	External device connection
③	External power supply terminal	External DC 24V input

Wiring

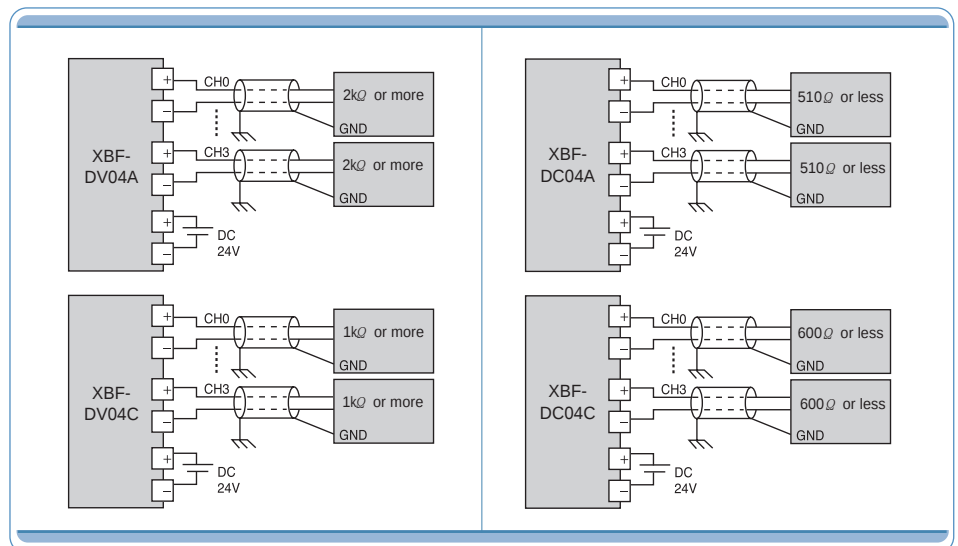

Specification

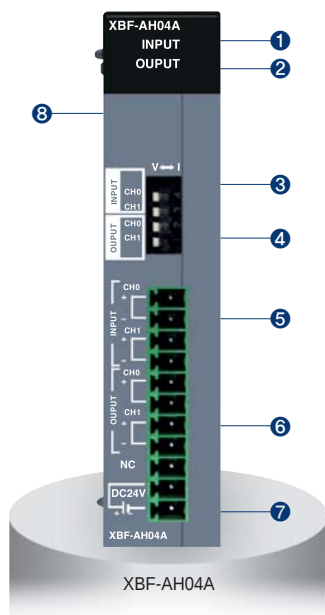


Item	XBF-AH04A	
	Input	Output
Analog channel	2 channels	2 channels
Analog range	DC 1 ~ 5V, DC 0 ~ 5V, DC 0 ~ 10V (Input resistance: 1 M Ω min.) DC 4 ~ 20mA, DC 0 ~ 20mA (Input resistance 250 Ω)	DC 1 ~ 5V, DC 0 ~ 5V, DC 0 ~ 10V (Load resistance $\geq$ 2k Ω) DC 4 ~ 20mA, DC 0 ~ 20mA (Load resistance $\leq$ 510 Ω)
Analog range selection	XG 5000 I/O parameter and External switch	
Digital data	Unsigned value	0 ~ 4000
	Signed value	-2000 ~ 2000
	Precise value	100 ~ 500 (DC 1 ~ 5V), 0 ~ 500 (DC 0 ~ 5V), 0 ~ 1000 (DC 0 ~ 10V) 400 ~ 2000 (DC 4 ~ 20mA), 0 ~ 2000 (DC 0 ~ 20mA)
	Percentile value	0 ~ 1000
Resolution(1/4000)	1.25mV (DC 1~5V, 0~5V), 2.5mV (DC 0~10V) 5 μ A (DC 4~20mA, 0~20mA)	
Max. conversion speed	$\pm$ 15V, 25mA	
Max. absolute output	1ms / Channel	
Accuracy	$\pm$ 0.5% or less	
Insulation method	Photocoupler insulation between I/O terminal and power supply	
Connection terminal	11-point terminal block	
Occupied I/O points	Fixed type: 64 points	
Current consumption	DC 5V	120mA
	DC 24V	130mA

Names and Functions


No.	Name	Descriptions
1	INPUT LED	- Indicates input condition of module - LED On: Normal condition - LED On and Off: Flickering - LED Off: Power Off or module malfunction
2	OUTPUT LED	- Indicates output condition of module - LED On: Normal condition - LED On and Off: Flickering - LED Off: Power Off or module malfunction
3	Input selection S/W	► Voltage / Current selection switch for input
4	Output selection S/W	► Voltage / Current selection switch for output
5	Terminal block	► Terminal for external input device
6		► Terminal for external output device
7	External power supply terminal	► Terminal for external DC 24V input
8	Expansion connector	► Terminal for expansion

Wiring

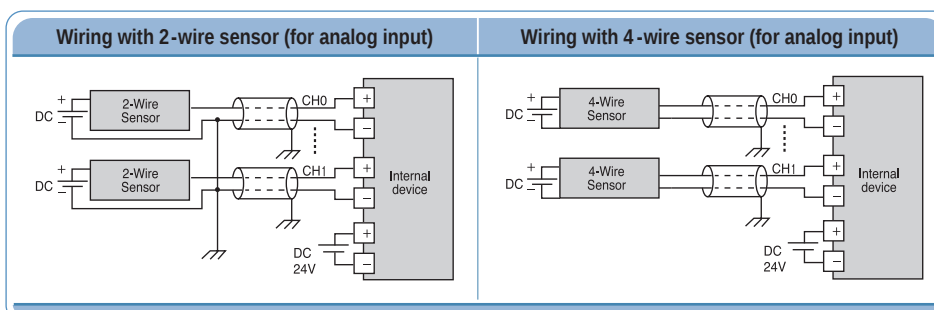

※ Use 22AWG, 2 conductor, twist shielded cable when wiring between analog module and external device.

Specification

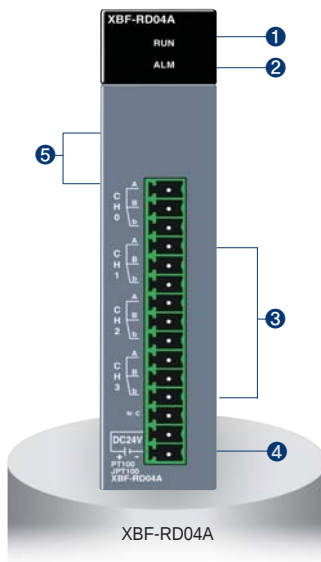

Item		XBF-RD04A
Number of channels		4
Sensor type	PT 100	JIS C1804-1997
	JPT 100	JIS C1604-1981, KS C1603-1991
Temperature range	PT 100	- 200 ~ 600℃
	JPT 100	- 200 ~ 600℃
Digital output	PT 100	- 2000 ~ 6000
	JPT 100	- 2000 ~ 6000
	Scaling	0 ~ 4000
Accuracy	25℃	±0.3% or less
	0 ~ 55℃	±0.5% or less
Conversion speed		40ms / Ch
Wiring method		3-wire
Current consumption	DC 5V	100mA
	DC 24V	100mA


Names and Functions

No.	Name	Descriptions
①	RUN LED	▶ Displays the hardware operation status (Fatal fault) • On: Normal status • Flickering: Error (0.2s flickering) • Off: hardware error or power off
②	ALM LED	▶ Displays the status of the channels (Light fault) • Flickering: Line disconnection (1s flickering) • Off: Normal status
③	Terminal block	▶ 3-wire RTD sensors can be connected
④	External power terminal	▶ Supplies the external DC 24V
⑤	Expansion connector	▶ Connects the module with an expansion module

Wiring

2-wire	3-wire	4-wire

Specification

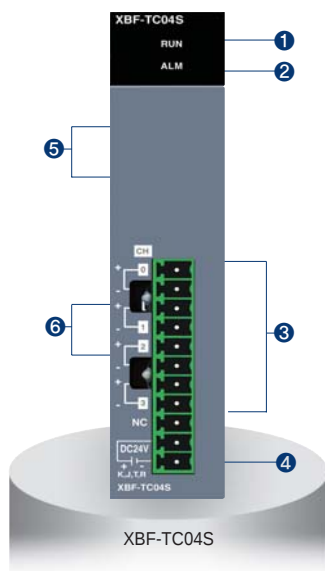


Item		XBF-TC04S
Number of channels		4
Input sensor type		Thermocouple K / J / T / R JIS C1602 - 1995
Temperature input range	K	- 200.0℃ ~ 1300.0℃ (- 328.0°F ~ 2372.0°F)
	J	- 200.0℃ ~ 1200.0℃ (- 328.0°F ~ 2192.0°F)
	T	- 200.0℃ ~ 400.0℃ (- 328.0°F ~ 752.0°F)
	R	0.0℃ ~ 1700.0℃ (32.0°F ~ 3092.0°F)
Digital output	Temperature display unit	Display down to one decimal place K, J, T: 0.1℃ R: 0.5℃
	Scaling display (Defined by user)	Unsigned scaling (0 ~ 65535)
		Signed scaling (- 32768 ~ 32767)
Accuracy	Normal temperature (25℃)	±0.2%
	Temperature coefficient (0 ~ 55℃)	±100 ppm / °C
Max. conversion speed		50ms / Channel
Warming-up time		15 minutes or more
Terminal		11-point terminal
I/O points occupied		64 points
Current consumption	DC 5V	100mA
	DC 24V	100mA


Names and Functions

No.	Name	Descriptions
1	RUN LED	▶ Displays the hardware operation status (Fatal fault) • On: Normal status • Flickering: Error (0.2s flickering) • Off: hardware error or power off
2	ALM LED	▶ Displays the status of the channels (Light fault) • Flickering: Line disconnection (1s flickering) • Off: Normal status
3	Terminal block	▶ Terminals to connect the thermo-couple sensor
4	External power terminal	▶ Terminals to supply the external DC 24V
6	RJC	▶ Device for Reference Junction Compensation

Wiring

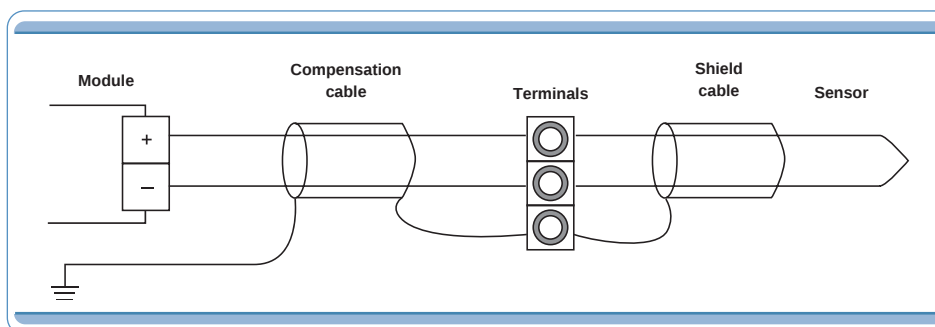

Specification

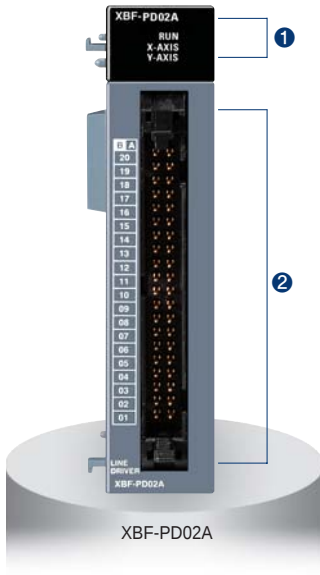


Item		XBF-PD02A
N0. of control axis		2 axis
Pulse output type		Line drive
Max. pulse output		2Mpps
Max. connection length		10m
Control mode		Position control, Speed control, Speed / Position switching control, Position / Speed switching control
Interpolation		Linear interpolation, Circular interpolation
Positioning data		150 operation data for each axis
Configuration tool		Built-in function parameter of XG5000
Back-up		Flash memory
Positioning	Positioning method	Absolute / Incremental method
	Unit	pulse
	Positioning range	- 2,147,483,648 ~ 2,147,483,648
	Speed range	1 ~ 2,000,000 (pulse/sec)
	Acceleration/Deceleration type	Trapezoidal acceleration / deceleration
Acceleration/Deceleration time		0 ~ 65,535ms, Asymmetric acceleration / deceleration
Max. encoder input		200kpps(Line drive)
Error/Operation		LED
I/O occupied points		Fixed type: 64 points
Connection terminal		40pin connector
Current consumption(mA)		500

Names and Functions

No.	Name	Descriptions
①	RUN LED	1. RUN ▶ Displays the hardware operation status • On: Normal status • Off: Abnormal status 2. X_AXIS, Y_AXIS • On: Operation • Flickering: Error
②	Terminal block	▶ Terminals to connect the MPG, external device and drive device.

Terminal

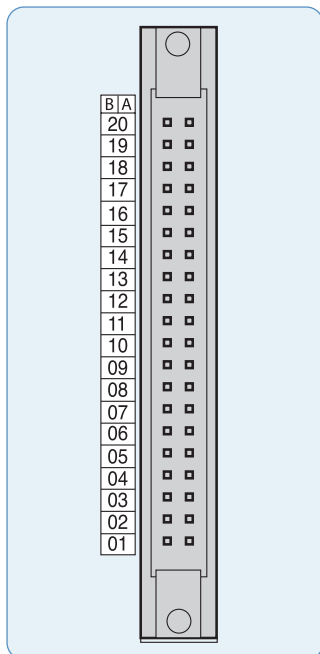

Pin number		Signal name	
X axis	Y axis		
B20		MPG A+	Manual Pulse Generator / Encoder A+ input
A20		MPG A-	Manual Pulse Generator / Encoder A- input
B19		MPG B+	Manual Pulse Generator / Encoder B+ input
A19		MPG B-	Manual Pulse Generator / Encoder B- input
A18	B18	FP+	Forward pulse+
A17	B17	FP-	Forward pulse-
A16	B16	RP+	Reverse pulse+
A15	B15	RP-	Reverse pulse-
A14	B14	OV+	High limit
A13	B13	OV-	Low limit
A12	B12	DOG	Near point
A11	B11	NC	-
A10	B10		
A09	B09	COM	Common
A08	B08	NC	-
A07	B07	INP	Inposition signal
A06	B06	INP COM	Inposition signal common
A05	B05	CLR	Deviation counter clear signal
A04	B04	CLR COM	Deviation counter clear signal common
A03	B03	HOME +5V	Zero signal(DC 5V)
A02	B02	HOME COM	Zero signal Common
A01	B01	NC	-

Specification




Item		Specification	
		XBF-H002A	XGF-HD02A
Count input signal	Signal	A-phase, B-phase	
	Input type	Voltage input (Open Collector)	Differential input (Line Drive):
	Signal level	DC 5/12/24V	RS-422A Line Drive/HTL LEVEL Line Drive
Maximum coefficient speed		200kpps	500kpps (HTL input : 250kpps)
Number of channels		2 Channels	
Coefficient range		Signed 32-bit (-2,147,483,648 ~ 2,147,483,647)	
Count mode		Linear Count (When 32-bit range exceeded, Carry /Borrow occurs, The count value stopped)	
		Ring Count (Repeated count within setting range)	
Input pulse mode		1-phase input	
		2-phase input	
		CW/CCW input	
Up/down setting	1-phase input	Increasing / Decreasing operation setting by B-phase input	
	2-phase input	Increasing / Decreasing operation setting by program	
	CW/CCW	Automatic setting by difference in phase	
Multiplication function	1-phase input	1/2 multiplication	
	2-phase input	1/2/4 multiplication	
	CW/CCW	1- multiplication	
Control input	Signal	Preset instruction input, Auxiliary mode instruction input	
	Signal level	DC 5V/12V/24V (by terminal selection) input type	
	Signal type	Voltage	
External output	Output points	2-point/channel (for each channel): Terminal output available	
	Type	Select single-compared (>, >=, =, <=, <) or section compared output (Included or excluded)	
	Output type	Open collector output (Sink)	
Operation status display	Input signal	A-phase input, B-phase input, Preset instruction input, Auxiliary mode instruction input	
	Output signal	External output 0, External output 1	
	Busy status	Module Ready	
Count enable		To be set through program (Count available only in enable status)	
Preset function		To be set through terminal or program	
Auxiliary mode function		Count clear,	
		Count latch,	
		Section count(time setting value: 0~60000ms),	
		Measurement of input frequency(for respective input phase),	
		Measurement of counts per hour(time setting value: 0~60000ms)	
		Count prohibited function	
Terminal		40 pin connector	
I/O occupied points		Fixed point: 64	
Current consumption(mA)		200	260
Weight		90g	

Names and Functions


No.	Name	Descriptions
①	Run LED (ØA, ØB, P, G, 00, 01)	▶ On: Relevant channel pulse inputting, Preset/Auxiliary function signal inputting, Outputting ▶ Off: No input of relevant channel pulse, No input of preset/ Auxiliary function signal, No output of comparison
	Ready signal (RDY)	▶ On: HSC module normal ▶ Off: Power off or CPU module reset, HSC module error • Flicker: HSC module error
②	External wiring connector	Connector to connect with external I/O

Terminal (XBF-H002A)

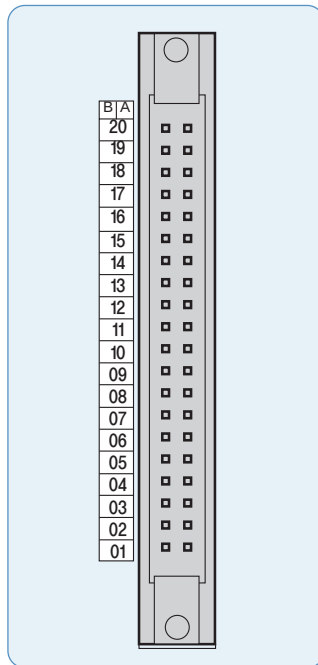

Pin arrangement		Signal name	
B ch1	A ch0		
20	20	A 24V	A phase pulse input 24V
19	19	A 12V	A phase pulse input 12V
18	18	A 5V	A phase pulse input 5V
17	17	A COM	A phase pulse input COM
16	16	B 24V	B phase pulse input 24V
15	15	B 12V	B phase pulse input 12V
14	14	B 5V	B phase pulse input 5V
13	13	B COM	B phase pulse input COM
12	12	P 24V	Preset input 24V
11	11	P 12V	Preset input 12V
10	10	P 5V	Preset input 5V
09	09	P COM	Preset input COM
08	08	G 24V	Auxiliary function input 24V
07	07	G 12V	Auxiliary function input 12V
06	06	G 5V	Auxiliary function input 5V
05	05	G COM	Auxiliary function input COM
04	04	OUT 0	Comparison output 0
03	03	OUT 1	Comparison output 1
02	02	24V	External power input 24V
01	01	24G	External power input GND

Terminal (XBF-HD02A)

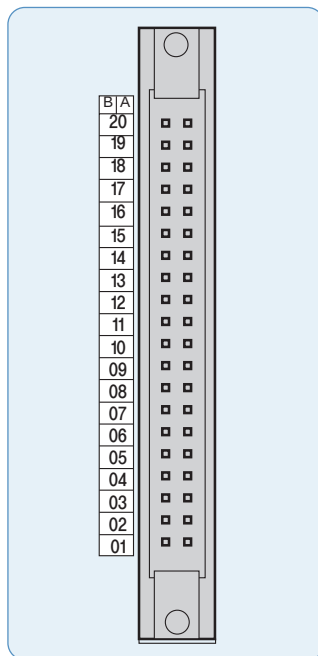

Pin arrangement		Signal name	
B ch1	A ch0		
20	20	A I +	A I phase differentiation input +
19	19	A I -	A I phase differentiation input -
18	18	A II +	A II phase differentiation input +
17	17	A II -	A II phase differentiation input -
16	16	B I +	B I phase differentiation input +
15	15	B I -	B I phase differentiation input -
14	14	B II +	B II phase differentiation input +
13	13	B II -	B II phase differentiation input -
12	12	P 24V	Preset input 24V
11	11	P 12V	Preset input 12V
10	10	P 5V	Preset input 5V
09	09	P COM	Preset input COM
08	08	G 24V	Auxiliary function input 24V
07	07	G 12V	Auxiliary function input 12V
06	06	G 5V	Auxiliary function input 5V
05	05	G COM	Auxiliary function input COM
04	04	OUT 0	Comparison output 0
03	03	OUT 1	Comparison output 1
02	02	24V	External power input 24V
01	01	24G	External power input GND

Ethernet (XBL-EMTA)



Item		XBL-EMTA
Communication spec.		10 / 100 Base-TX
Protocol		TCP / IP, UDP / IP
Service	With LS PLCs	High-speed link, P2P service
	With other devices	P2P service
	Application	Dedicated protocol service, XG5000 service
HS link sending / Receiving data		200words / block (Max. 64blocks)
No. of channel Connectable to upper stage		6 channels
Service		Communication with PC (HMI) and external devices, High-speed communication among LSIS PLCs
Media		UTP / STP Category 5
Current consumption(mA)		300

RS-232C, RS-422 / 485



Item		Built-in RS-232C	XBL-C21A	Built-in RS-485	XBL-C41A
Interface		RS-232C 1ch	RS-232C 1ch	RS-485 1ch	RS-422 / 485 1ch
MODEM function		Remote communication via the external MODEM (XBL-C21A Only)			
Mode	Dedicate	1:1 or 1:N via the dedicated protocol			
	XG5000 mode	Program download, Upload and control via the remote control			
	P2P	Communication defined by the protocol using XG-PD XGT / Modbus master			
Operation mode	Server (slave)	XGT / Modbus server, User-defined communication			
	Client (master)	XGT / Modbus P2P Master, User-defined communication			
Data format	Start Bit	1			
	Data Bit	7 or 8			
	Stop Bit	1 or 2			
	Parity	Even / Odd / None			
	Setting	Setting by XG-PD parameter			
Synchronous		Asynchronous			
Speed (bps)		1,200 / 2,400 / 4,800 / 9,600 / 19,200 / 38,400 / 57,600 / 115,200 bps			
Station number		Setting by XG-PD, Max. 32 stations			
Distance		RS-232C: Max.15m (Expansion by MODEM), RS-422/485: Max 500m			
MODEM communication		–	Support	–	–
Network		1 : 1		1 : N	
Diagnostic		Via LED and XG-PD			
Max. expansion		Built-in	2 stages	Built-in	2 stages

RAPiNet (XBL-EIMT)



Item		XBL- EIMT
Transmission standard	Transmission speed	100Mbps
	Transmission method	Base band
	Max. extension distance between nodes	100m
	Max. number of nodes	64
	Max. protocol size	1,516 bytes
	Access method to service zone	CSMA / CD
	Frame error check	$CRC\ 32 = X^{32} + X^{26} + X^{23} + \dots + X^2 + X + 1$
	Normal communication guarantee	Max. 1,200 (packet/sec)
Basic standard	Dimension (mm)	90(H) x 27(W) x 60(D)
	Current consumption(mA)	290
	Weight (g)	102

Ethernet/IP (XBL-EIPT)



Item		XBL- EIPT
Transmission standard	Transmission speed	100Mbps
	Transmission method	Base band
	Max. extension distance between nodes	100m
	Access method to service zone	CSMA / CD
	Frame error check	$CRC\ 32 = X^{32} + X^{26} + X^{23} + \dots + X^2 + X + 1$
Topology		Line, Star
The number of connections (Client / Server)	TCP	16 / 32
	CIP (IO communication)	32 / 64
Number of Max. services (P2P)		2
Number of Max. installations		2
Max. setting data size per block	Periodic client	500 bytes
	Aperiodic client	512 bytes
Basic standard	Dimension (mm)	90(H) x 27(W) x 60(D)
	Current consumption(mA)	290
	Weight (g)	102

CANopen Module (XBL-CMEA, XBL-CSEA)



Item		XBL-CMEA	XBL-CSEA
Transmission Speed		10, 20, 50, 100, 125, 250, 500, 800, 1000Kbps	
Num. of port		1	
Max. node		32	-
PDO	TPDO	Total 32	64
	RPDO		64
Max. size of data per PDO		8Byte	
PDO transfer type		Synchronous acyclic(0), synchronous cyclic(1~240), RTR(252~253), time-event trigger(254~255)	
Support SDO		Client 127/ Server 1	Server 1
SDO transfer type		Expedited, Normal	-
Access method		CSMA/BA(Carrier Sense Multiple Access/Bitwise Arbitration)	
Topology		BUS	
SYNC Service		Producer Cycle : 20~5000ms	Consumer
NMT. eode control		NMT master	NMT slave
Emergency		Save the last five per slave	Save up to last 10
NMT. error control		Heartbeat, Life guarding	Heartbeat
Network scan		O	-
Size (mm)		90(H)X27(W)X60(D)	
Current consumption(mA)		211	202
Weight(g)		78	


Option modules



Option modules

XBO-AD02A	Voltage/Current, Input 2 chs
XBO-DA02A	Voltage/Current, Output 2 chs
XBO-AH02A	Voltage/Current, Input 1 ch
	Voltage/Current, Output 1 ch
XBO-TC02A	TC(Thermocouple), Input 2 chs
XBO-RTCA	RTC(Real Time Clock)
XBO-DC04A	DC 24V, Input 4 points
XBO-TN04A	Transistor(Sink), Output 4 point
XBO-RD01A	RTD(Resistance Temperature Detect, Input 1 ch)

Smart link

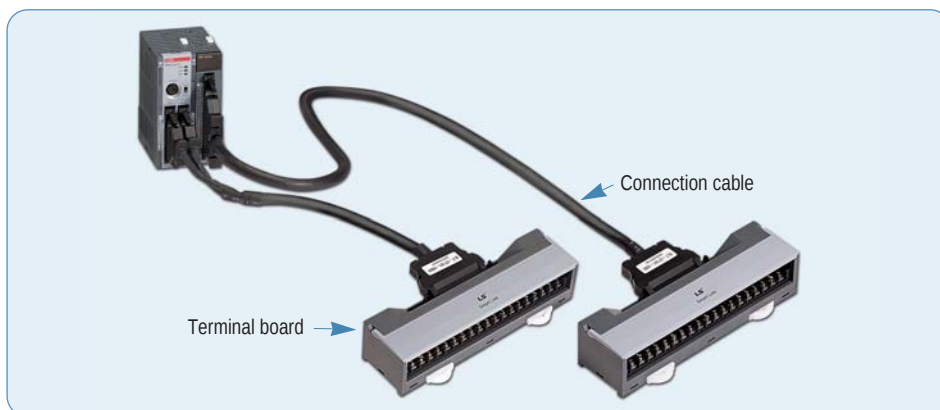


Terminal board	Connection cable	XBM-DN16S XBM-DN32S	XBE-DC32A	XBE-TN32A	XBE-TP32A	Cable length
TG7-1H40S (Terminal board)	R40H/20HH-05S-XBM3	●	—	—	—	0.5m
	R40H/20HH-10S-XBM3	●	—	—	—	1.0m
	C40HH-05SB-XBI	—	●	●	●	0.5m
TG7-1H40CA (Terminal board, Common)	C40HH-10SB-XBI	—	●	●	●	1.0m
	C40HH-15SB-XBI	—	●	●	●	1.5m
	C40HH-20SB-XBI	—	●	●	●	2.0m
	C40HH-30SB-XBI	—	●	●	●	3.0m
R32C-NS5A-40P (Relay board : sink)	C40HH-05SB-XBI	—	—	●	—	0.5m
	C40HH-10SB-XBI	—	—	●	—	1.0m
	C40HH-15SB-XBI	—	—	●	—	1.5m
	C40HH-20SB-XBI	—	—	●	—	2.0m
	C40HH-30SB-XBI	—	—	●	—	3.0m
R32C-PS5A-40P (Relay board : source)	C40HH-05PH-XBP	—	—	—	●	0.5m
	C40HH-15PH-XBP	—	—	—	●	1.5m
	C40HH-20PH-XBP	—	—	—	●	2.0m

XG5000

(Programming software)


- Program editing & Engineering software
- Windows-based easy operation
- Multi-PLC, Multi-programming support
- Various monitoring and diagnosis functions
- Vista 2000, XP (Limited use in Windows 98, ME)

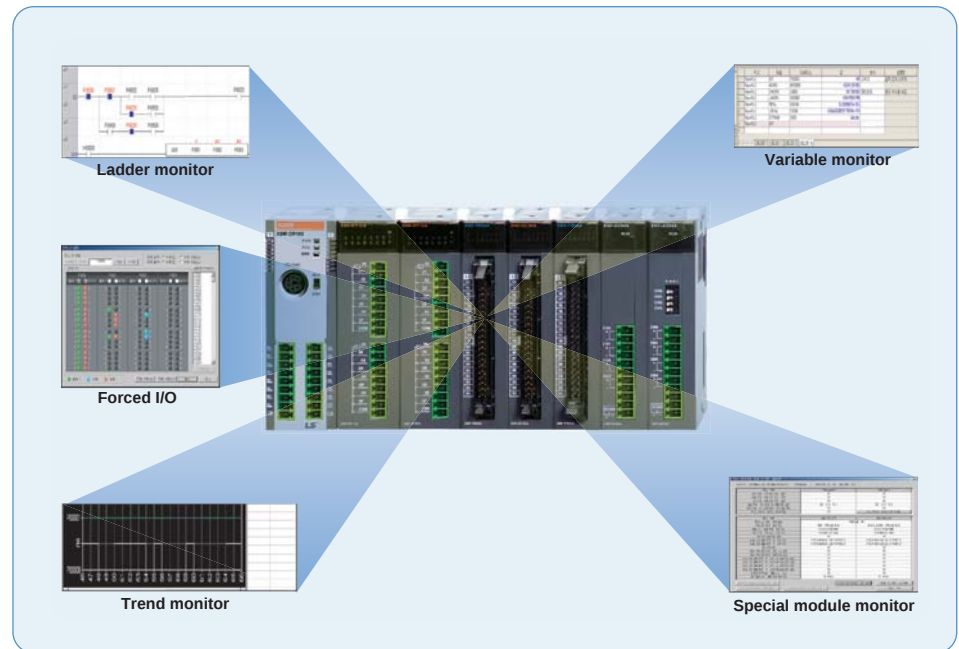

XG-PD

(Network setting software)

- Convenient network setting
- Extended monitoring function for network system and communication modules
- Fast interface with CPU by effective network management
- Various built-in diagnosis, functions
(CPU condition, Link condition, Service condition, Frame monitoring)

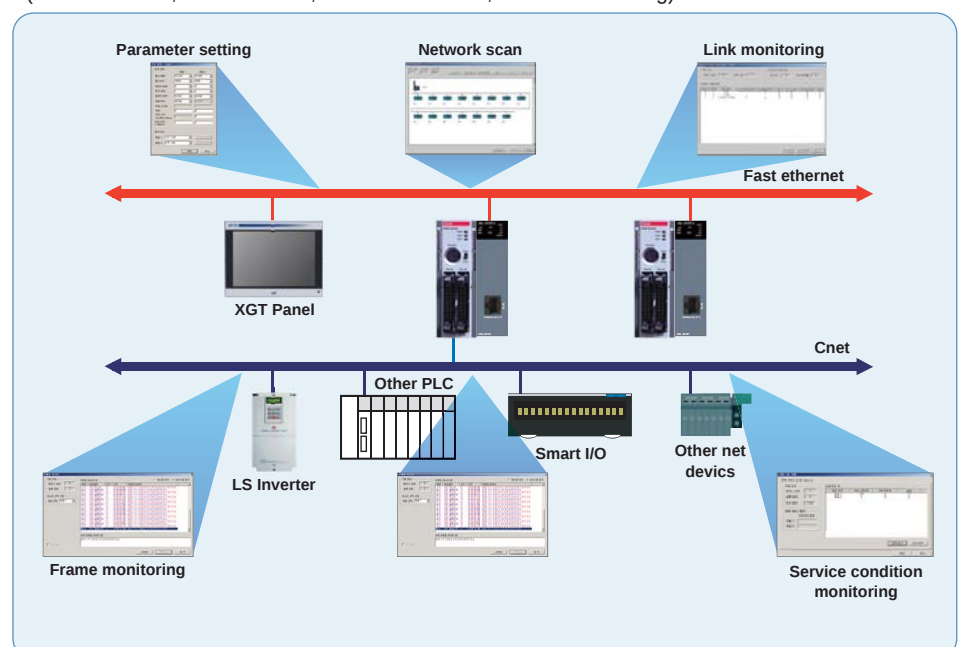

Product list

Item	Model	Specifications
Block type unit (Economic type)	XBC/XEC-DR10E	AC 100 ~ 240V, 6 points DC input, 4 point Relay output
	XBC/XEC-DR14E	AC 100 ~ 240V, 8 points DC input, 6 point Relay output
	XBC/XEC-DR20E	AC 100 ~ 240V, 12 points DC input, 8 point Relay output
	XBC/XEC-DR30E	AC 100 ~ 240V, 18 points DC input, 12 point Relay output
	XBC/XEC-DN10E	AC 100 ~ 240V, 6 points DC input, 4 point transistor output (Sink)
	XBC/XEC-DN14E	AC 100 ~ 240V, 8 points DC input, 6 point transistor output (Sink)
	XBC/XEC-DN20E	AC 100 ~ 240V, 12 points DC input, 8 point transistor output (Sink)
	XBC/XEC-DN30E	AC 100 ~ 240V, 18 points DC input, 12 point transistor output (Sink)
	XBC/XEC-DP10E	AC 100 ~ 240V, 6 points DC input, 4 point transistor output (Source)
	XBC/XEC-DP14E	AC 100 ~ 240V, 8 points DC input, 6 point transistor output (Source)
	XBC/XEC-DP20E	AC 100 ~ 240V, 12 points DC input, 8 point transistor output (Source)
	XBC/XEC-DP30E	AC 100 ~ 240V, 18 points DC input, 12 point transistor output (Source)
Block type unit (Standard type)	XBC-DR20SU	AC 100~240V, 12-point DC input, 8-point Relay output
	XBC-DN/DP20S(U)	AC 100~240V, 12-point DC input, 8-point TR output (Sink/Source type)
	XBC-DR30SU	AC 100~240V, 18-point DC input, 12-point Relay output
	XBC-DN/DP30S(U)	AC 100~240V, 18-point DC input, 12-point TR output (Sink/Source type)
	XBC-DN/DP40SU	AC 110/240V , 24-point DC input, 16-point TR output (Sink/Source type)
	XBC-DR40SU	AC 110/240V , 24-point DC input, 16-point Relay output
	XBC-DN/DP60SU	AC 110/240V , 36-point DC input, 24-point TR output (Sink/Source type)
	XBC-DR60SU	AC 110/240V , 36-point DC input, 24-point Relay output
	XEC-DN20SU	AC 110/240V , 12-point DC input, 8-point TR output
	XEC-DR20SU	AC 110/240V , 12-point DC input, 8-point Relay output
	XEC-DN30SU	AC 110/240V , 18-point DC input, 12-point TR output
	XEC-DR30SU	AC 110/240V , 18-point DC input, 12-point Relay output
	XEC-DN40SU	AC 110/240V , 24-point DC input, 16-point TR output
	XEC-DR40SU	AC 110/240V , 24-point DC input, 16-point Relay output
	XEC-DN60SU	AC 110/240V , 36-point DC input, 24-point TR output
	XEC-DR60SU	AC 110/240V , 36-point DC input, 24-point Relay output
Block type unit (High performance type)	XBC-DR32H	AC 110~220V, 16-point DC input, 16-point Relay output
	XBC-DN32H	AC 110~220V, 16-point DC input, 16-point TR output
	XBC-DR64H	AC 110~220V, 32-point DC input, 32-point Relay output
	XBC-DN64H	AC 110~220V, 32-point DC input, 32-point TR output

Product list

Item	Model	Specifications
Block type unit (High performance type)	XBC-DR32H/DC	DC 24V, 16-point DC input, 16-point Relay output
	XBC-DN32H/DC	DC 24V, 16-point DC input, 16-point TR output
	XBC-DR64H/DC	DC 24V, 32-point DC input, 32-point Relay output
	XBC-DN64H/DC	DC 24V, 32-point DC input, 32-point TR output
	XEC-DR32H	AC 110~220V, 16-point DC input, 16-point Relay output
	XEC-DN32H	AC 110~220V, 16-point DC input, 16-point TR output
	XEC-DR64H	AC 110~220V, 32-point DC input, 32-point Relay output
	XEC-DN64H	AC 110~220V, 32-point DC input, 32-point TR output
	XEC-DR32H/D1	DC 12/24V, 16-point DC input, 16-point Relay output
	XEC-DR64H/D1	DC 12/24V, 32-point DC input, 32-point Relay output
Modular type unit	XBM-DR16S	DC 24V, 8-point DC 24V input, 8-point relay output
	XBM-DN16S	DC 24V, 8-point DC 24V input, 8-point TR output
	XBM-DN32S	DC 24V, 16-point DC 24V input, 16-point TR output
Expansion I/O module	XBE-DC08A	8-point DC 24V input
	XBE-DC16A	16-point DC 24V input
	XBE-DC32A	32-point DC 24V input
	XBE-RY08A	8-point relay output
	XBE-RY16A	16-point relay output
	XBE-TN08A	8-point Transistor (sink) output
	XBE-TN16A	16-point Transistor (sink) output
	XBE-TN32A	32-point Transistor (sink) output
	XBE-TP08A	8-point Transistor (source) output
	XBE-TP16A	16-point Transistor (source) output
	XBE-TP32A	32-point Transistor (source) output
	XBE-DR16A	8-point DC 24V input, 8-point relay output
Special module	XBF-AD04A	4-channel analog input (current/voltage)
	XBF-AD04C	4-channel analog input(current/ voltage, resolution : 1/16000)
	XBF-AH04A	2-channel analog input (current/voltage)/2-channel analog output (current/ voltage)
	XBF-DV04A	4-channel analog output (voltage)
	XBF-DV04C	4-channel analog input(voltage, resolution : 1/16000)
	XBF-DC04A	4-channel analog output (current)
	XBF-DC04C	4-channel analog input(current, resolution : 1/16000)


Product list

Item	Model	Specifications
Special module	XBF-RD04A	4-channel RTD input
	XBF-TC04S	4-channel Thermocouple input
	XBF-PD2A	Line drive 2 axis
	XBF-AD08A	8-channel analog input (Current /voltage)
	XBF-HO02A	2-channel High-speed counter input (Open collector)
	XBF-HD02A	2-channel High-speed counter input (Line drive)
Communication module	XBL-C41A	Cnet (RS -422/485), 1ch
	XBL-C21A	Cnet (RS -232C), 1ch
	XBL-EMTA	Fast Ethernet (100Mbps), 1ch
	XBL-EIMT	RAPiEnet, 2 ch
	XBL-EIPT	Ethernet/IP, 2 ch
	XBL-EIMF	RAPiEnet I/F, Max. 2km(Fiber 2 ch.), 100Mbps
	XBL-EIMH	RAPiEnet I/F(Twisted pair 1ch, Fiber 2 ch.), 100Mbps
	XBL-CMEA	CANopen(10, 20, 50, 100, 125, 250, 500, 800, 1000Kbps, Num of PDO : 32)
	XBL-CSEA	CANopen(10, 20, 50, 100, 125, 250, 500, 800, 1000Kbps, Num of PDO : 64)
Loader cable	PMC-310S	Connection cable (PC to PLC), 9pin(PC)-6pin(PLC)
	USB-301A	Connection cable (PC to PLC), USB
Memory module	XBO-M2MB	Memory
Option modules	XBO-AD02A	Voltage/Current, Input 2 ch
	XBO-DA02A	Voltage/Current, Output 2 ch
	XBO-AH02A	Voltage/Current, Input 1ch / Voltage/Current, Output 1ch
	XBO-TC02A	TC (Thermo couple), Input 2 ch
	XBO-RTCA	RTC (Real time clock), Battery
	XBO-DC04A	DC 24V, Input 4 points
	XBO-TN04A	TR (Sink), Output 4 points
	XBO-RD01A	RTD (Resistance temperature detector), Input 1ch

Product list


Terminal board	Connection cable	XBM-DN16S XBM-DN32S	XBE-DC32A	XBE-TN32A	XBE-TP32A	Cable length
TG7-1H40S (Terminal board)	R40H/20HH-05S-XBM3	●	—	—	—	0.5m
	R40H/20HH-10S-XBM3	●	—	—	—	1.0m
TG7-1H40CA (Terminal board, Common)	C40HH-05SB-XBI	—	●	●	●	0.5m
	C40HH-10SB-XBI	—	●	●	●	1.0m
	C40HH-15SB-XBI	—	●	●	●	1.5m
	C40HH-20SB-XBI	—	●	●	●	2.0m
	C40HH-30SB-XBI	—	●	●	●	3.0m
R32C-NS5A-40P (Relay board: sink)	C40HH-05SB-XBI	—	—	●	—	0.5m
	C40HH-10SB-XBI	—	—	●	—	1.0m
	C40HH-15SB-XBI	—	—	●	—	1.5m
	C40HH-20SB-XBI	—	—	●	—	2.0m
	C40HH-30SB-XBI	—	—	●	—	3.0m
R32C-PS5A-40P (Relay board: source)	C40HH-05PH-XBP	—	—	—	●	0.5m
	C40HH-15PH-XBP	—	—	—	●	1.5m
	C40HH-20PH-XBP	—	—	—	●	2.0m

Download cable diagram

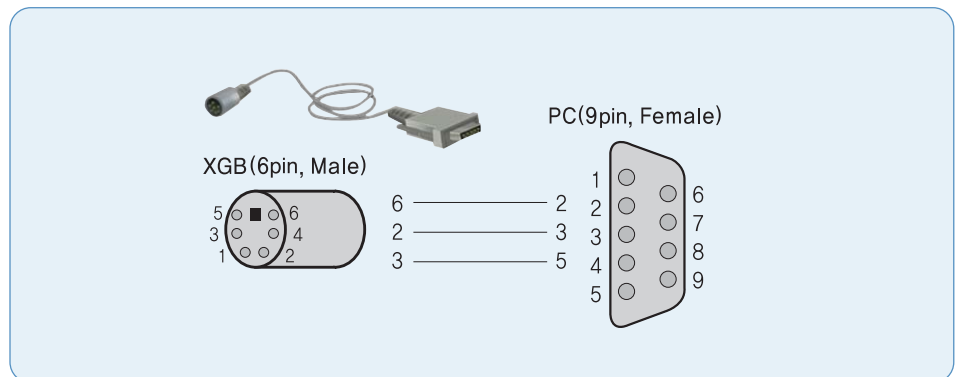


Block type unit


XBC/XEC-H type
(64points)

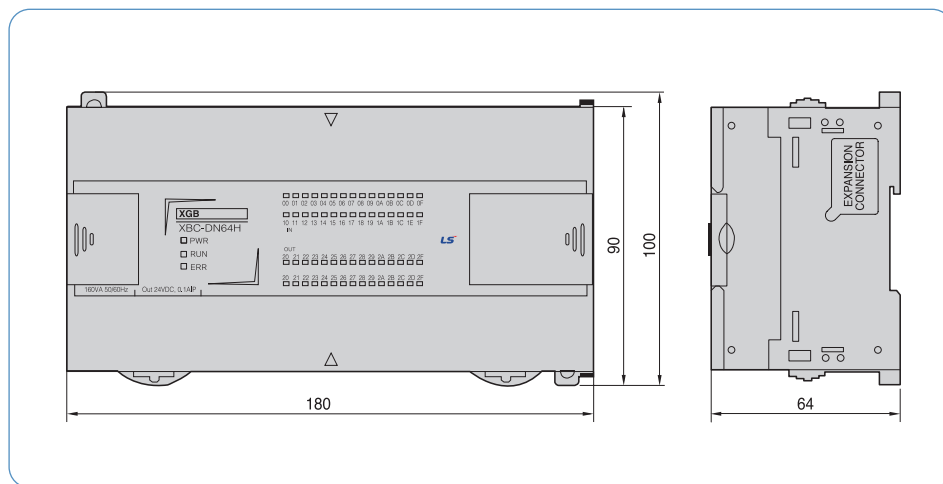


XBC/XEC-H type
(32points)

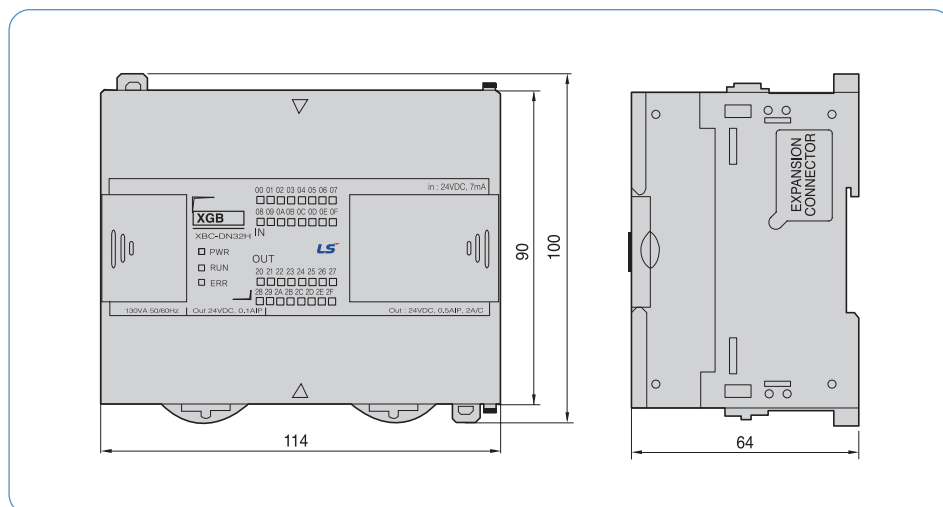


XBC-S type

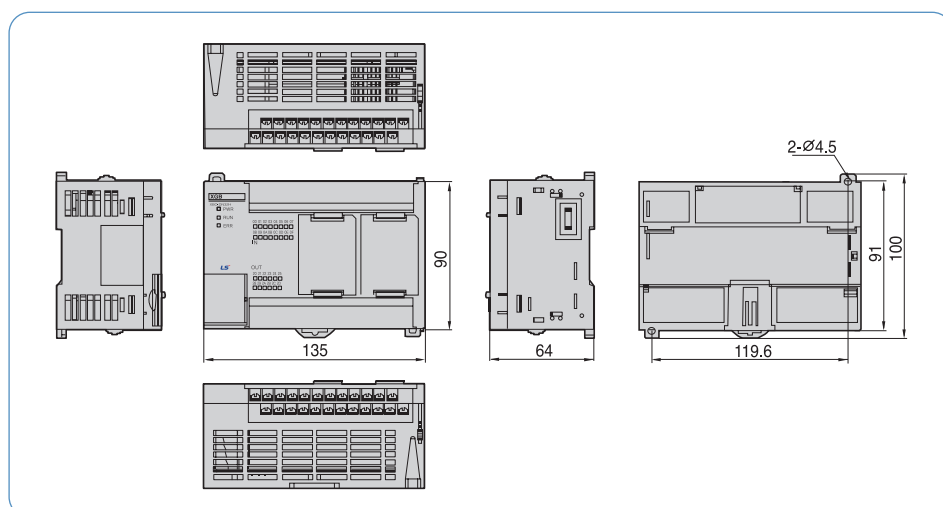

XBC-E type (DR10E, DR14E)

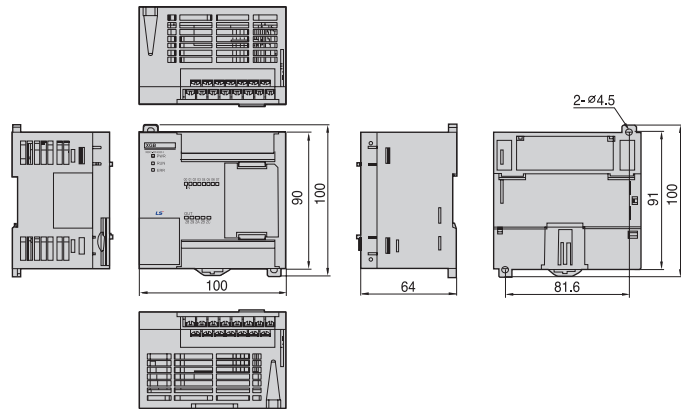


XBC-E type (DR20E, DR30E)

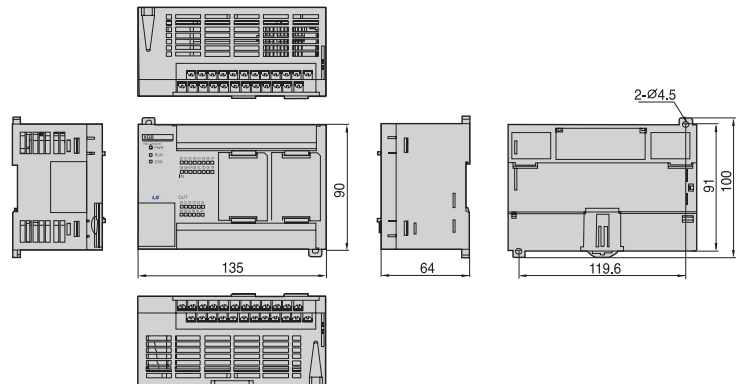

Modular type unit

XBM-S type

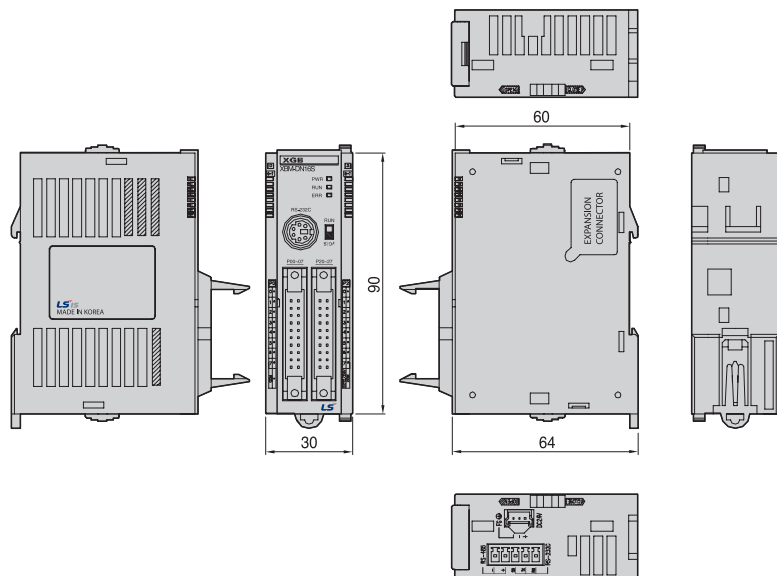

Worldwide Network

Head Office and Domestic Factories (Cheongju, Cheonan, Busan)

Dalian LSIS Co., Ltd.

LSIS Beijing R & D Center

LSIS Shanghai R & D Center

LSIS (Wuxi) Co., Ltd.

LS-VINA Industrial Systems Co., Ltd. Hanoi

LSIS (Europe) B.V., Netherlands

LSIS (Middle East) FZE

domestic

Head Office

LS-ro 127 (Hogye-dong), Dongan-gu, Anyang-si,
Gyeonggi-do 431-848, Korea
Tel 82-2-2034-4870 _ Fax 82-2-3660-7021

Cheongju Factory

1 Songjeong-dong, Cheongju-si, Chungcheongbuk-do, 361-720, Korea
Tel 82-43-261-6114 _ Fax 82-43-261-6602

Cheonan Factory

181 Samseong-ri, Mokcheon-myeon, Cheonan-si, Chungcheongnam-do, 330-840, Korea
Tel 82-41-550-8114 _ Fax 82-41-566-8408

Automation R&D Center

533 Hogye-dong, Dongan-gu, Anyang-si, Gyeonggi-do, 431-749, Korea
Tel 82-31-450-7114

Electrotechnology R&D Center

1 Songjeong-dong, Cheongju-si, Chungcheongbuk-do, 361-720, Korea
Tel 82-43-261-6114

Power Testing & Technology Institute

1 Songjeong-dong, Cheongju-si, Chungcheongbuk-do, 361-720, Korea
Tel 82-43-261-6114

Cheongju Training Institute

1 Songjeong-dong, Cheongju-si, Chungcheongbuk-do, 361-720, Korea
Tel 82-43-268-2631

Cheongju Factory



Wuxi Factory (China)



Cheonan Factory



Dalian Factory (China)




Automation R&D Center



Hanoi Factory (Vietnam)



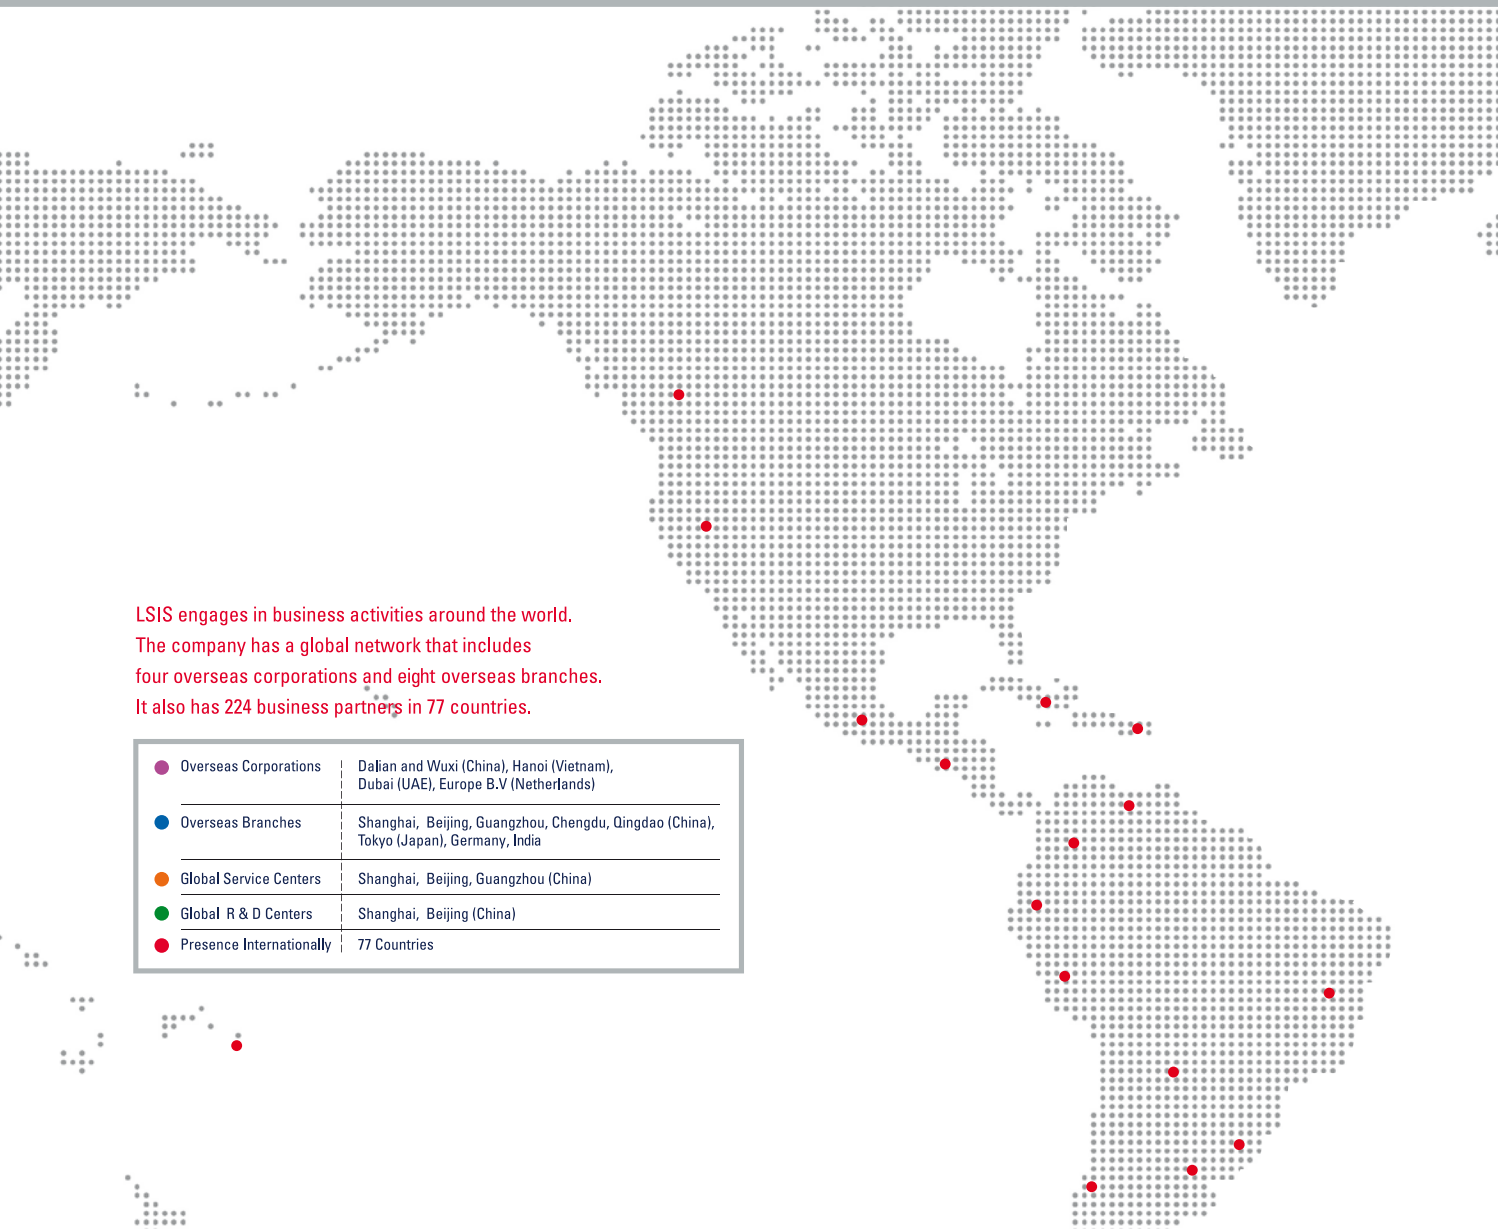

LSIS engages in business activities around the world.
The company has a global network that includes
four overseas corporations and eight overseas branches.
It also has 224 business partners in 77 countries.

● Overseas Corporations	Dalian and Wuxi (China), Hanoi (Vietnam), Dubai (UAE), Europe B.V (Netherlands)
● Overseas Branches	Shanghai, Beijing, Guangzhou, Chengdu, Qingdao (China), Tokyo (Japan), Germany, India
● Global Service Centers	Shanghai, Beijing, Guangzhou (China)
● Global R & D Centers	Shanghai, Beijing (China)
● Presence Internationally	77 Countries

overseas

LSIS (ME) FZE_Dubai, U.A.E.

Address: Jafza View Tower Lob 19, Room 205 Along Sheikh Zayed Road,
Jebel Ali Free Zone Dubai, United Arab Emirates
Tel: 971-4-886-5360/Fax: 971-4-886-5361/e-mail: jungyongl@sis.biz

LSIS Europe B.V.

Address:Tupolevlaan 48, 1119 NZ, Schiphol-RijkThe Netherlands
Tel: 31-20-654-1420/Fax: 31-20-654-1429/e-mail: junshickp@sis.biz

Dalian LSIS Co., Ltd._Dalian, China

Address: No. 15, Liaohexi 3-Road, Economic and Technical Development Zone,
Dalian 116600, China
Tel: 86-411-273-7777/Fax: 86-411-8730-7560 / e-mail: cuibx@sis.com.cn

Dalian LSIS (Wuxi) Co., Ltd._Wuxi, China

Address: 102-A, National High & New Tech Industrial Development Area,
Wuxi, Jiangsu, 214028, P. R. China
Tel: 86-510-8534-6666/Fax: 86-510-522-4078/e-mai l: caidx@sis.com.cn

LS-VINA I S Co., Ltd._Hanoi, Vietnam

Address: Nguyen Khe, Dong Anh, Hanoi, Vietnam
Tel: 84-4-882-0222/Fax: 84-4-882-0220/e-mail: srjo@sisvina.com

LSIS Tokyo Office_Tokyo, Japen

Address: 16FL, Higashi-Kan, Akasaka Twin Tower 17-22, 2-chome, Akasaka,
Monato-ku, Tokyo 107-8470, Japan
Tel: 81-3-3582-9128/Fax: 81-3-3582-2667/e-mail: jschuna@sis.biz

LSIS Shanghai Office_Shanghai, China

Address: Room E-G, 12FL, Hiamin Empire Plaza, No. 726, West Yan'an Road, Shanghai
200050, P.R. China
Tel: 86-21-5237-9977(609)/Fax: 89-21-5237-7189/e-mail: jinhk@sis.com.cn

LSIS Beijing Office_Beijing, China

Address: B-Tower 17FL, Beijing Global Trade Center B/D, No. 36, East BeisanHuan-Road,
DongCheng-District, Beijing 100013, P.R. China
Tel: 86-10-5825-6027(666)/Fax: 86-10-5825-6028/e-mail: huangxd@sis.com.cn

LSIS Guangzhou Office_Guangzhou, China

Address: Room 1403, 14FL, New Poly Tower, No. 2, Zhongshan Liu Road,
Guangzhou, P.R China
Tel: 86-20-8328-6754/Fax: 86-20-8326-6287/e-mail: zhangch@sis.com.cn

LSIS Chengdu Office_Chengdu, China

Address: 12FL, Guodong Buiding, No.52, Jindun Road, Chengdu, 610041, P.R. China
Tel: 86-28-8612-9151(9226)/Fax: 86-28-8612-9236/e-mail: comysb@sis.biz

LSIS Qingdao Office_Qingdao, China

Address: YinHe Bldg., Room 402, No. 2P, Shandong Road, Qingdao-City,
Shandong-province, 266071, P.R. China
Tel: 86-532-8501-6068/Fax: 86-532-8501-6057/e-mail: jinxz@sis.com.cn

Green Innovators of Innovation



Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance.
Do not disassemble or repair by yourself !
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.

LSIS Co., Ltd.

© 2006. LSIS Co., Ltd. All Rights Reserved.

■ HEAD OFFICE

LS-ro 127(Hogye-dong), Dongan-gu, Anyang-si,
Gyeonggi-do 431-848, Korea

- **Asia/ South America**
+82-2-2034-4888 cshwang@lsis.biz (Charles Hwang)
- **Western Europe**
+82-2-2034-4676 sukyong@lsis.biz (Brian Choi)
- **CIS / Turkey / Eastern Europe / Israel**
+82-2-2034-4879 dkimc@lsis.biz (Daniel Kim)
- **North America**
+82-2-2034-4471 pikwon@lsis.biz (Paul Inbeom Kwon)
- **Oceania**
+82-2-2034-4394 kacho@lsis.biz (Kendra Cho)
- **Africa**
+82-2-2034-4467 myleed@lsis.biz (Henry Lee)
- **MIDDLE EAST**
+971-4-886-5360 khchoi1@lsis.biz (Lambert Choi)

Specifications in this catalog are subject to change without notice due to continuous product development and improvement.

■ Global Network

- **LSIS (ME) FZE » Dubai, U.A.E.**
Address Jafza View Tower Lob 19, Room 205 Along Sheikh Zayed Road Jebel Aali Free Zone Dubai, United Arab Emirates,
Tel + 971-4-886-5360 Fax + 971-4-886-5361 E-mail jungyongl@lsis.biz
- **LSIS Europe B.V.**
Address Tupolevlaan 48, 1119 NZ, Schiphol-Rijk The Netherlands
Tel +31-20-654-1420 Fax +31-02-654-1429 E-mail junshickp@lsis.biz
- **LSIS (Dalian) Co., Ltd » Dalian, China**
Address No. 15.Liaohexi 3-Road. Economic and Technical Development zone. Dalian 116600. China
Tel +86-411-8730-7510 Fax +86-411-8731-8277 E-mail cuibx@lsis.com.cn
- **LSIS (Wuxi) Co., Ltd » Wuxi, China**
Address 102-A. National High & New Tech Industrial Development Area. Wuxi. Jiangsu. 214028. P.R. China
Tel +86-510-8534-6666 Fax +86-510-8534-4078 E-mail caidx@lsis.com.cn
- **LS-VINA IS Co., Ltd » Hanoi, Vietnam**
Address Nguyen Khe Dong Anh, Hanoi
Tel +84-4-38820 222.3 Fax +84-4-38820 220 E-mail srjo@lsisvina.com, ylsuk@lsisvina.com
- **LSIS Tokyo Office » Tokyo, Japan**
Address 16FL. Higashi-Kan. Akasaka Twin Tower 2-17-22. Akasaka. Minato-ku Tokyo 107-0052. Japan
Tel +81-3-3582-9128 Fax +81-3-3582-2667 E-mail jschuna@lsis.biz
- **LSIS Shanghai Office » Shanghai, China**
Address Room E-G. 12FL Huamin Empire Plaza. No.726. West Yan'an Road Shanghai 200050. P.R. China
Tel +86-21-5237-9977(501) Fax +89-21-5237-7189 E-mail liyong@lsis.com.cn
- **LSIS Beijing Office » Beijing, China**
Address B-Tower 17FL. Beijing Global Trade Center. No. 36. East BeisanHuan-Road. DongCheng-District. Beijing 100013. P.R. China
Tel +86-10-5825-6027(666) Fax +86-10-5825-6028 E-mail xunmj@lsis.com.cn
- **LSIS Guangzhou Office » Guangzhou, China**
Address Room 1403.14FL. New Poly Tower. 2 Zhongshan Liu Road.Guangzhou.P.R China
Tel +86-20-8326-6754 Fax +86-20-8326-6287 E-mail chenxs@lsis.com.cn
- **LSIS Chengdu Office » Chengdu, China**
Address Room 1710.17FL. Huamin Empire Plaza. No.1 Fu Xing Street.Chengdu.610016. P.R. China
Tel +86-28-8670-3201 Fax +86-28-8670-3203 E-mail yangcf@lsis.com.cn
- **LSIS Qingdao Office » Qingdao, China**
Address Room 2001.YinHe Bldg. No. 29 Shandong Road, Qingdao. 266071, P.R. China
Tel +86-532-8501-6058 Fax +86-532-8501-6057 E-mail wangzy@lsis.com.cn