




XDL/XML Series XGT Servo System




XGT Servo System **XDL/XML** Series

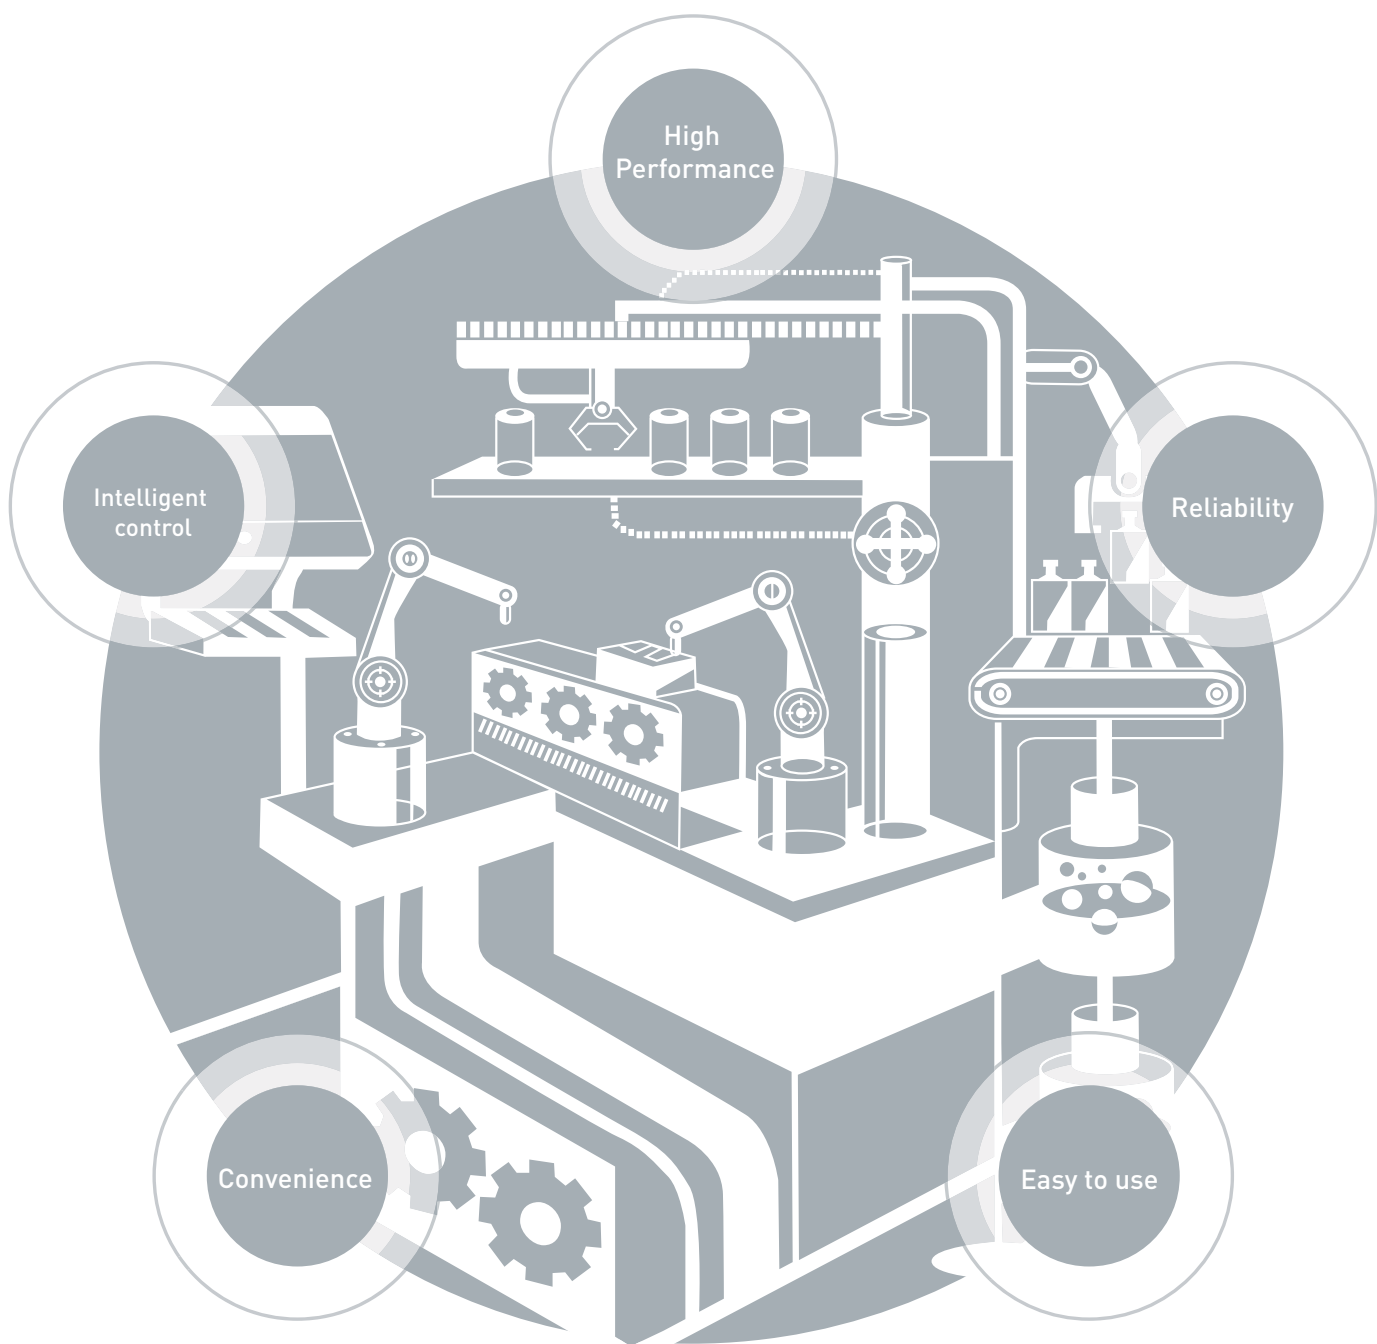

Features

4 ~ 13

Features



Servo Drive

14 ~ 57


Servo Drive



Servo Motor

58 ~ 99

Servo Motor



Options and Accessories

100 ~ 118

Options and Accessories



Application

122 ~ 135

Application

User-oriented XDL/XML Series
LSIS XGT Servo systems complete
your optimal solution.



XDL /

Your motion systems visualize the perfect solution through the LS comprehensive product ranges for the optimal drives and applications. Its high-performance vector, precision and speed control are user-friendly and cost effective.



XML Series

It's Slim

Compact size with high capacity

Capacity	400W (44% Down Size)			1kW (46% Down Size)			3.5kW (62% Down Size)		
Series	XDL	VS	Competitor	XDL	VS	Competitor	XDL	VS	Competitor
L [mm]	38	80	40	58	88	60	88	137	90
W [mm]	169	187	168	169	210	168	169	256	168
H [mm]	173	132	170	198	195	195	198	225	195

38 mm

The Minimized Width
to 38mm!!! (400W)




Reliability

Main capacitor quality improved

- Long-life type capacitor applied (2.5 times improvement)

Convenient DC reactor installable

- Power connection to DC-link
- Easier wiring and smaller size compared to 3-phase AC reactor
- Connection for DC input (PI, N)



Stable turn-off function based on the detection of the control power turn-off

Upgraded protection function (II)

- Triple protection functions for power module : IPM fault, CL detecting, over current detecting with S/W
- Main power mis-wiring detecting function : Selecting 3 phase or single phase, and alarm or warning is available
- Protecting overheating with thermal sensor in the drive and motor
- Alarm code grouping and exclusive output contacts (AL00, AL01, AL02)
- Warning function (digital output, warning output) : Mis-wiring of power, low voltage for encoder battery, over speed command, over torque command, over load, mis-matched motor and drive

52%

Compared with VS Drive
Max 52% Slim



1kW



3.5kW


5%

Compared with
competitor's Drive
Max 5% Slim

Upgraded protection function (III)

- Detecting function for accumulated over load of regenerative resistor
 - : Protect algorithm is provided with embedded resistor characteristic
 - : Protection by capacity (P0-11) and resistance (P0-10)
 - : Providing de-rating factor for radiant heat
- Available continuous overload capacity setting as followed operating condition
 - : Protect with separated overload table at stall & operation
 - : Set overload check level (P0-12)
 - : Setting warning signal output level is available (P0-13)

CE, RoHS certificated

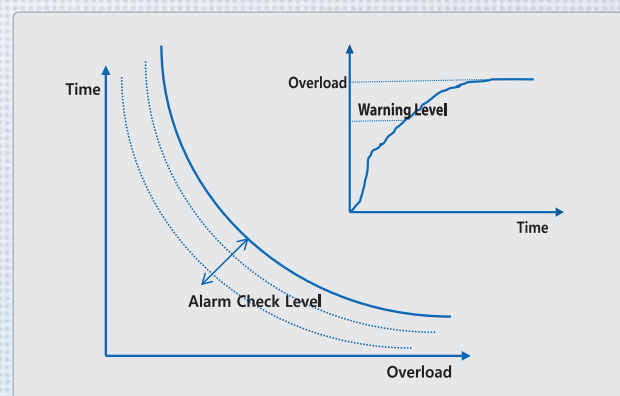


Easy to USE

Reliable partner with global standard performance and easy control by user-centric environment



Easy gain tuning with automatic inertia estimating function

- Quick & Accurate Inertia Estimating
- On-Line Tuning: L7NH, L7P
- Off-Line Tuning: L7N, L7S
- Parameter for Estimation (Speed & Distance)



Encoder with bi-directional high speed serial communication

- Automatic Identification (Motor ID / Encoder pulse)
- BiSS protocol
- Easy wiring (15 encoder wires → 7 encoder wires) and anti-external noise





Sufficient input/output contacts and various functions

- L7S: Digital input contacts: 10, output contacts: 8 / Analog input contacts: 2 and output contacts: 2
- L7N: Digital input contacts: 6, output contacts: 4 / Analog input contacts: 2 and output contacts: 2
- L7NH: Digital input contacts: 8, output contacts: 4 / Analog input contacts: 1 and output contacts: 2
- L7P: Digital input contacts: 16, output contacts: 8 / Analog input contacts: 2 and output contacts: 2
- PEGASUS: Digital input contacts: 4, output contacts: 2 / Analog input contacts: 1 and output contacts: 1
- Flexible assignment of input/output signals by parameters and contact setting based on the input/output contact type (N.O / N.C contacts)

Using the rotary switch to configure the drive node address [L7NH, L7P, and PEGASUS]

- Using the rotary switch to configure the drive node address conveniently
- L7NH: 0-99, L7P: 0-31, PEGASUS: 0-15




Plug-in type power connector

- Expanded to 100 W - 3.5 kW for improved wiring convenience



Various homing functions [L7NH, L7P, and PEGASUS]

- The drive provides the homing function.
- You can specify the speed, acceleration, offset, and homing method.

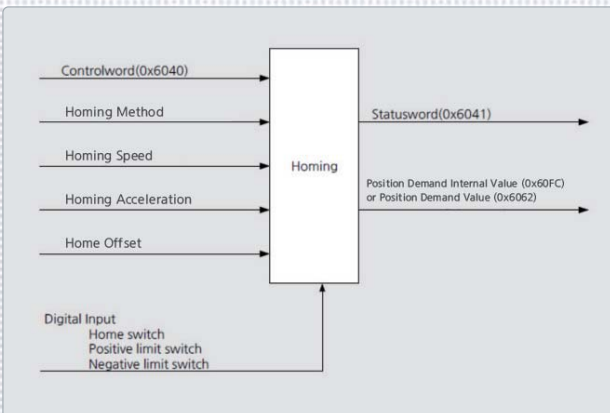

Easy firmware upgrade [L7NH, L7P, and PEGASUS]

- Supporting the USB OTG function to allow firmware download with a USB memory
- Useful where space is limited or environmentally unfavorable



Built-in regenerative braking resistance in the drive

- Drive installed inside to improve user convenience (100 W - 3.5 kW)
- Providing the connection for external installation
- Enhanced protection algorithm



Features

XGT Servo series with high speed, incredible performance,
smart and convenience. It's time to check value of XDL/XML series



High Performance

Serial encoder of high resolution (16 bit - 21 bit)

- Stability improved during precision position control and low-speed operation

Stable low-speed properties based on precise speed measurement

- Stable speed measurement at low speed

Calculation speed improved [L7NH, L7P, and PEGASUS]

- FPU (Floating Point Unit) for reliable precision calculation
- 16 kHz switching frequency for precision current control
- 32 bit operation for increased synchronous command processing rate (MIPS)

Dedicated PC program

- L7S, and L7N: LIVE-I.C.E / L7NH, L7P, and PEGASUS: Drive CM
- PC program for shortened equipment tuning time and debugging
- Monitoring for speed, torque, current feedback, position values and positional error values and alarm occurrence time

Intelligent Control

Notch filter for resonance suppression



- 4-step notch filter
- 2-step vibration suppression filter at the load position
- FFT function for real-time frequency analysis

Various gain switching modes for improved control performance

- P/PI auto-switching function to reduce overshooting during acceleration/deceleration
- Various Gain1 ↔ Gain2 switching modes

Various dynamic brake control modes

- Configuring the operation mode at stop and after stop

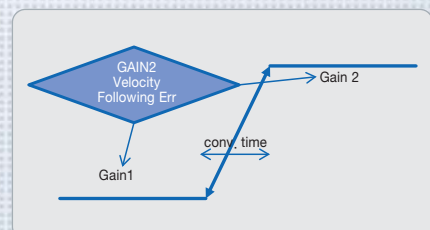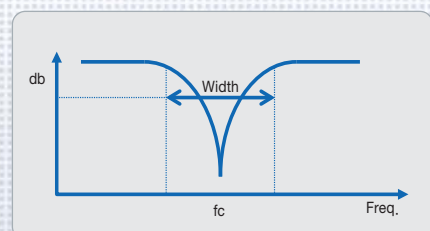

Convenience

Providing various functions– backup, network diagnosis, monitoring and built-in functions focused on improving efficiency



High Performance

- High speed, Real-time capability and Synchronization mechanism

Open Network

- Over 1600 worldwide members

Cost Effective

- Standard Ethernet Cabling + Connectors, Less implementation efforts for master and slave

Easy to Use

- Versatile topology and Diagnostics

XDL Drive with Built-in EtherCAT Interface

- 100BASE-TX(100Mbps) Ethernet based real-time communication
- Support CiA402(IEC61800-7) drive profile
- Interoperability
- Max. 100m between nodes
- Precise synchronization mechanism (1us)
- Freely settable process data length and mapping
- Four status indication LEDs (L/A0, L/A1, RUN, ERR)
- Standard RJ45 connector and cabling(CAT5)
- Support various homing modes
- Support Full-Closed control (Being developed)

Various operation modes

- L7N: Using the EtherCAT communication to support Cyclic (P/S/T) and Profile (P/S/T) modes
- L7NH and PEGASUS: Using the EtherCAT communication to support Cyclic & Profile (P/S/T) modes, EOE, COE, and FOE

Safe torque off function

- Torque-off forced by hardware signals without involvement of the drive CPU and FPGA (ASIC); international standards adopted (IEC61508)

High speed position capture function



- Touch probe function(PROBE1, PROBE2)

Adjustment function linked with XGT series from LSIS

- Inertia detection, position/speed gain manual adjustment, gain switching setup, etc.


Have conformity of EtherCAT device


- In-house test using CTT(Conformance Test Tool)

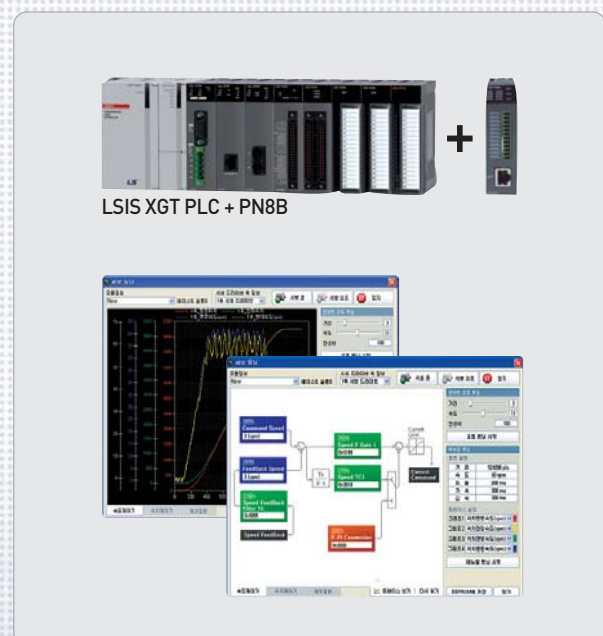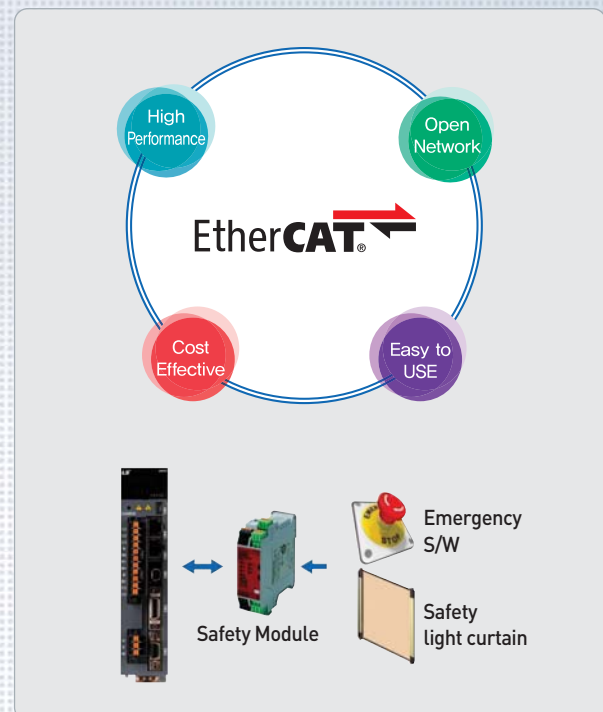

Provide gain tuning tools and commissioning packages

- Automatic inertia tuning and PI gains
- Gain conversion setting
- Manual fine gain tuning tool
- Object save and initialization function
- Alarm history function(recently issued 20 alarm codes)

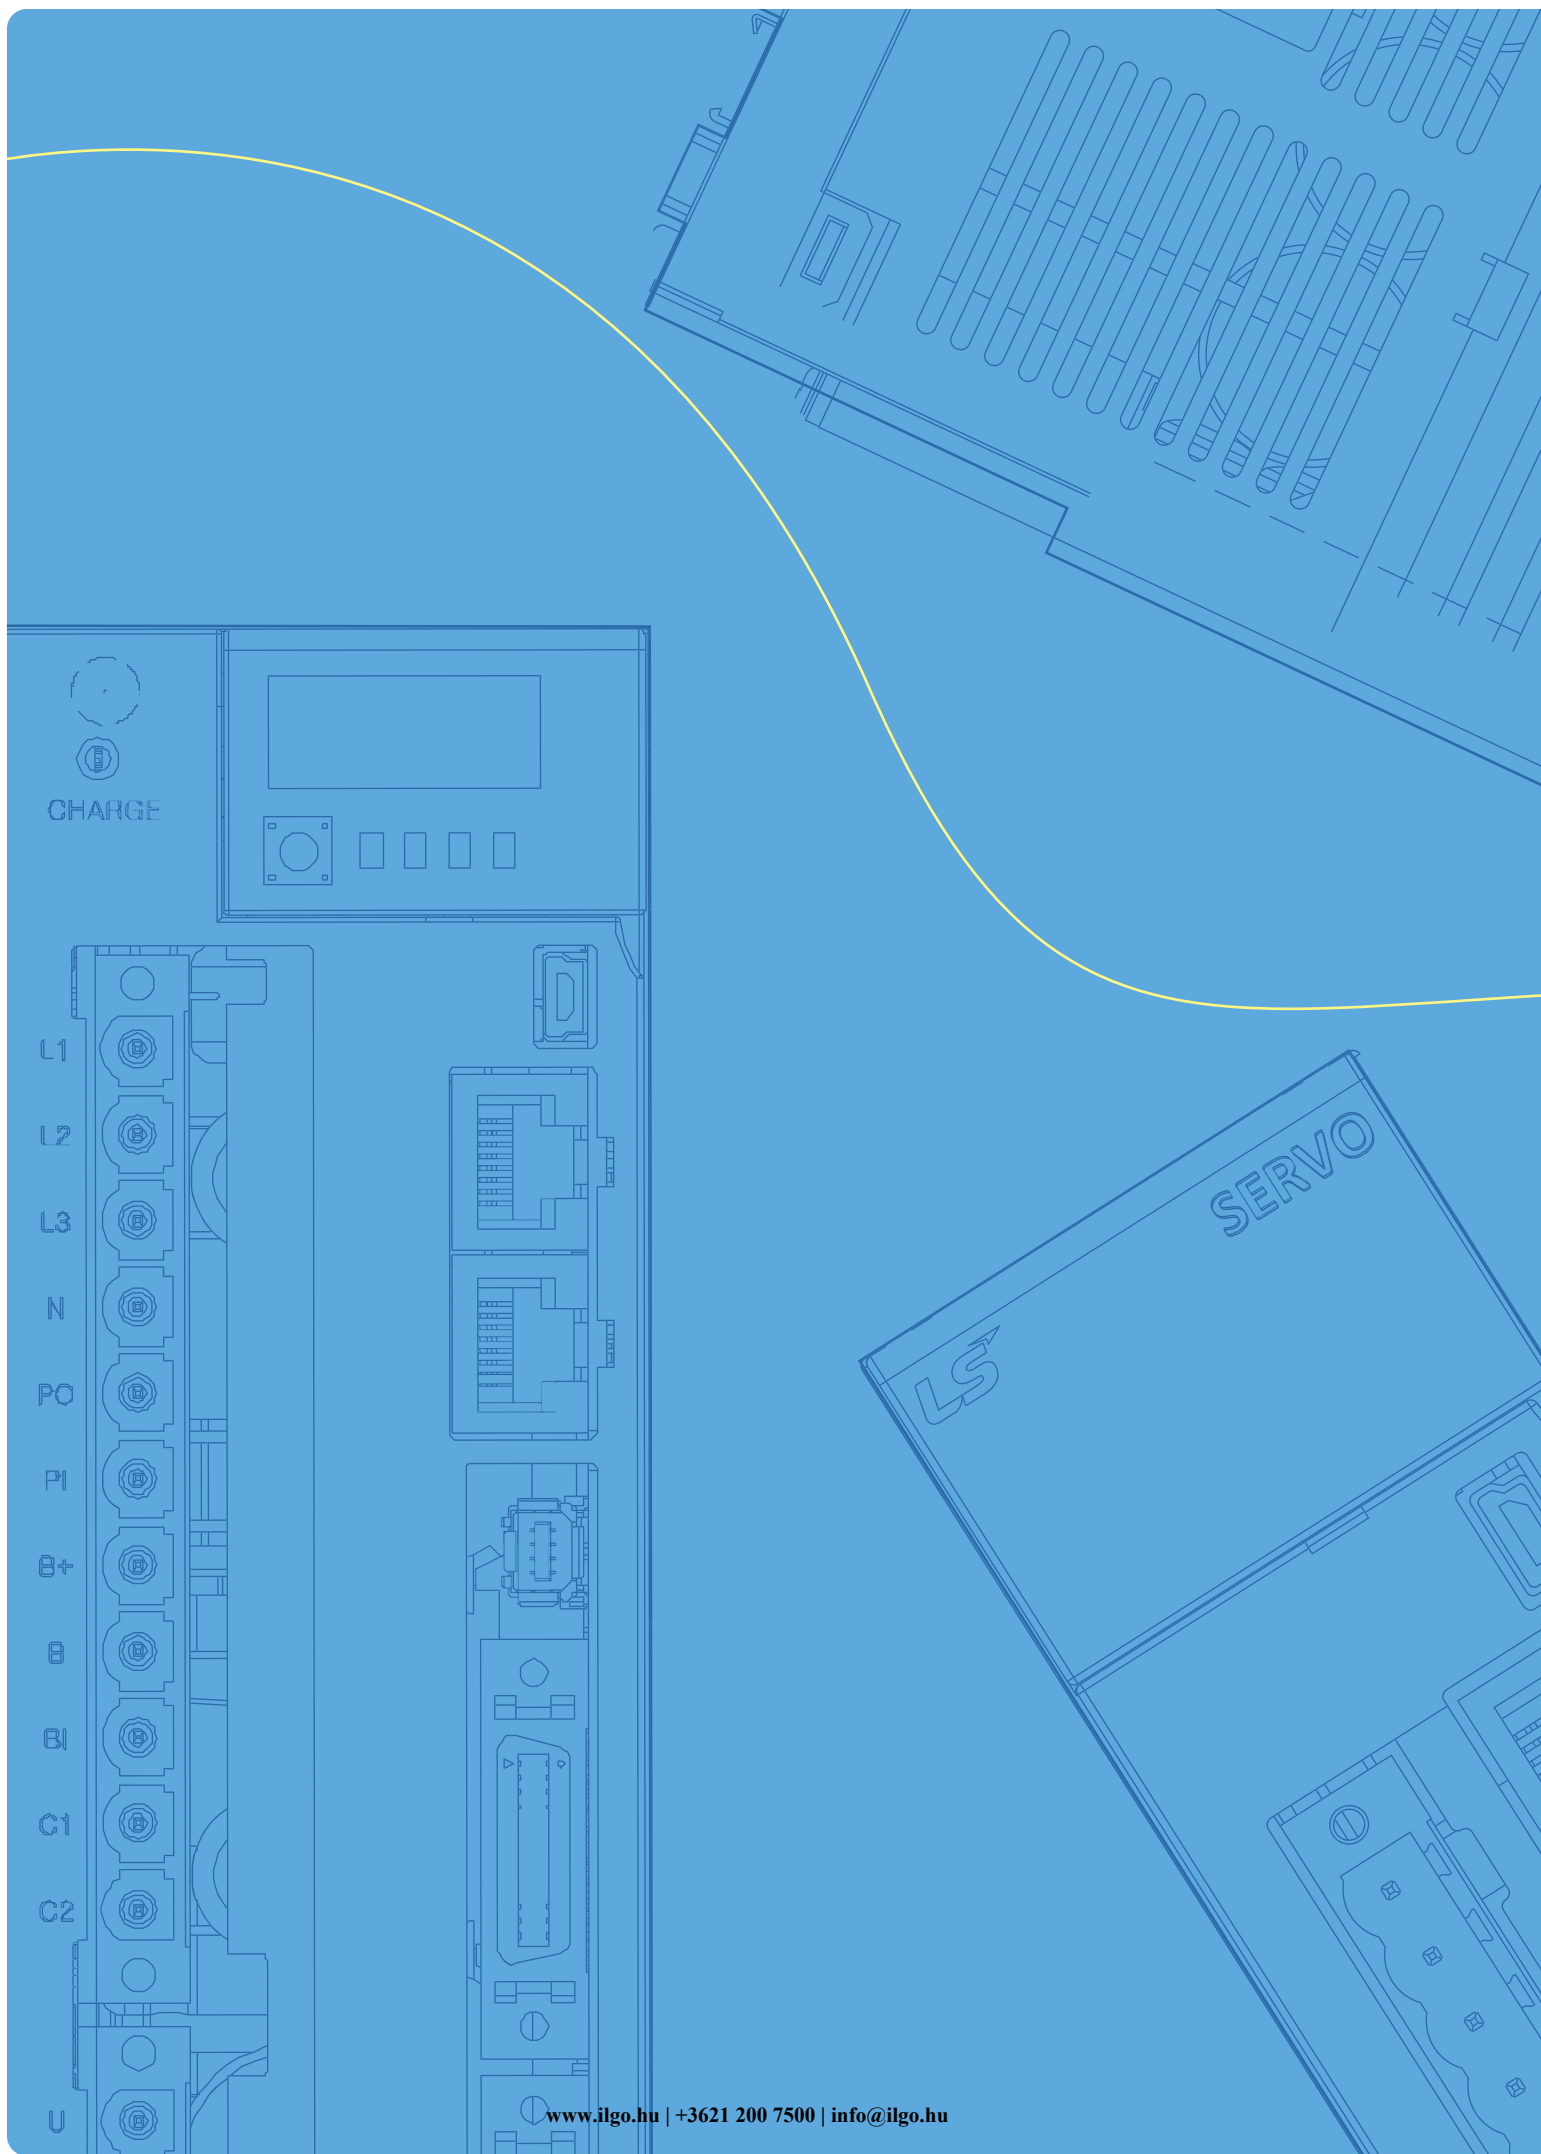



Servo Drive

Contents

L7S Series

Pulse, Analog Command Type ----- 16

L7N Series

EtherCAT Communication Type ----- 28

L7NH Series

All-in-One EtherCAT Communication Type ----- 34

L7P Series

Indexer Function Type ----- 46

XIP(PEGASUS) Series

Integrated Servo System Type ----- 52

XDL-L7S Series



Servo Drive Designation

XDL	-	L7	S	A	004	B	AA
Model Name		Communication	Input Power Supply	Capacity	Encoder Type	Option	
XDL Series		S : Standard I/O Type	A : 200VAC B : 400VAC	001 : 100W 002 : 200W 004 : 400W 008 : 750W 010 : 1.0kW 020 : 2.0kW 035 : 3.5kW 050 : 5.0kW 075 : 7.5kW 150 : 15.0kW	A : Quadrature (Pulse Type) B : Serial (Communication Type)	Exclusive Option Code	

* Range

- 200V : 0.1kW~5.0kW
- 400V : 1.0kW~15kW

Pulse, Analog Command Type XDL-L7S

Easy to USE

- Easy Gain Tuning with Automatic Inertia Estimating Function
- Easy Setting Built-in Panel Operator
- Many I/O Contacts and Various Functions
(Digital Input: 10 contacts, Digital Output: 8 contacts / Analog input, output : 2 contacts)


Reliability for Protection Function

- CE, RoHS Certificated
- Drive Protection Function and Warn unction

High Response for Precision Control

- High Resolutions Serial type Encoder(19Bit, BiSS)
- Improved Speed Response($\approx 1\text{Khz}$) Frequency

- 1 Operation keys (Mode, Up, Down, Set)
- 2 Charge Lamp
- 3 Main Power Connector (L1, L2, L3)
- 4 DC Reactor Connector(PO, PI)
 - Short-Circuit when not used
- 5 Regenerative resistance connector (B+, B, BI)
 - Short-Circuit B, BI terminals when standard type
 - Use B+, B terminals when using external resistor
- 6 Control Power Connector (C1, C2)
- 7 Front Cover
- 8 Motor Power Cable Connector (U, V, W)
- 9 Heat Sink
- 10 Display
- 11 CN5 : USB Connector
- 12 CN4 : RS-422 Communication Connector
- 13 CN3 : RS-422 Communication Connector
- 14 CN1 : Control Signal Connector
- 15 CN2 : Encoder Signal Connector
- 16 Ground

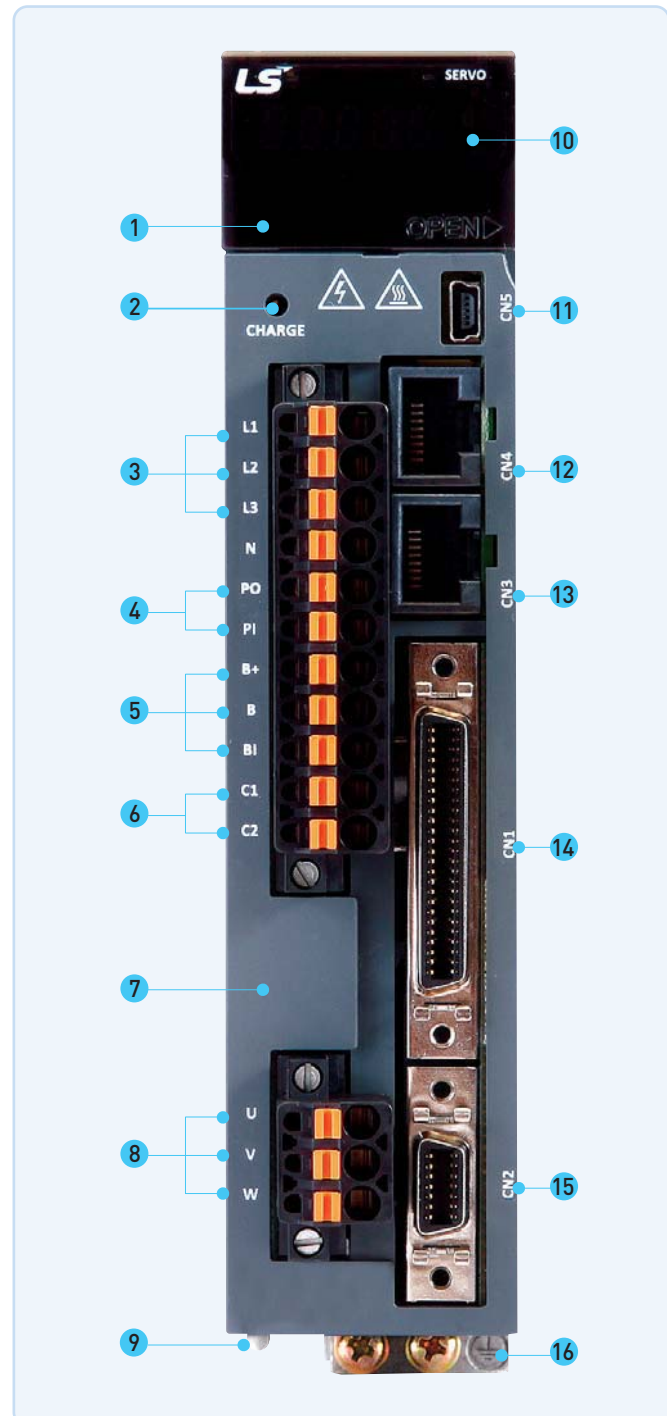

XDL-L7SA Incremental Type

Rated Speed (rpm)	Maximum Speed (rpm)	Flange Size	Applicable Motor	Applicable Drive	Standard Encoder Type	Encoder Cable	Power Cable			
					Quadrature Type	INC	For power	Power + Brake	Brake	
3,000	5,000	□40	SAR3A	L7SA001A	* 2,048P/R	XLCS-E□□□AS	XLCS-P□□□GS		XLCS-P□□□KB	
		□40	SAR5A	L7SA001A						
		□40	SA01A	L7SA001A						
		□40	SA015A	L7SA002A						
		□60	SB01A	L7SA002A						
		□60	SB02A	L7SA002A						
		□60	SB04A	L7SA004A						
		□80	SC04A	L7SA004A						
		□80	SC06A	L7SA008A						
		□80	SC08A	L7SA008A						
		□80	SC10A	L7SA010A						
		□130	SE09A	L7SA008A		XLCS-E□□□BS	XLCS-P□□□HS	XLCS-P□□□NB		
		□130	SE15A	L7SA020A						
		□130	SE22A	L7SA020A			XLCS-P□□□JS	XLCS-P□□□LB		
		□130	SE30A	L7SA050A						
		□180	SF30A	L7SA035A						
		□180	SF50A	L7SA050A						
2,000	3,000	□80	SC03D	L7SA004A	* 3,000P/R	XLCS-E□□□AS	XLCS-P□□□GS		XLCS-P□□□KB	
		□80	SC05D	L7SA008A						
		□80	SC06D	L7SA008A						
		□80	SC07D	L7SA008A						
		□130	SE06D	L7SA008A			XLCS-P□□□HS	XLCS-P□□□NB		
		□130	SE11D	L7SA010A						
		□130	SE16D	L7SA020A			XLCS-P□□□IS	XLCS-P□□□PB		
		□130	SE22D	L7SA020A						
		□180	SF22D	L7SA020A			XLCS-P□□□JS	XLCS-P□□□LB		
		□180	LF35D	L7SA035A						
1,500	3,000	□180	SF55D	L7SA050A		XLCS-E□□□BS	XLCS-P□□□IS		XLCS-P□□□SB	
		□220	SG22D	L7SA020A						
		□220	LG35D	L7SA035A						
		□220	SG55D	L7SA050A						
		□130	SE05G	L7SA008A			XLCS-P□□□HS	XLCS-P□□□NB		
		□130	SE09G	L7SA010A						
		□130	SE13G	L7SA020A			XLCS-P□□□IS	XLCS-P□□□PB		
		□130	SE17G	L7SA020A						

XDL-L7SA Serial Type

Rated Speed (rpm)	Maximum Speed (rpm)	Flange Size	Applicable Motor	Applicable Drive	Standard Encoder Type	Encoder Cable		Power Cable				
					Serial Type	Serial	Abs	For power	Power + Brake	Brake		
3,000	5,000	□40	FALR5A	L7SA001B	* 18Bit Serial / M-Turn Abs	XLCS- E □ □ □ ES	XLCS- E □ □ □ ES1	XLCS- P □ □ □ LS		XLCS- P □ □ □ QS		
		□40	FAL01A	L7SA001B								
		□40	FAL015A	L7SA002B								
		□60	FBL01A	L7SA001B								
		□60	FBL02A	L7SA002B								
		□60	FBL04A	L7SA004B								
		□80	FCL04A	L7SA004B								
		□80	FCL06A	L7SA008B								
		□80	FCL08A	L7SA008B								
		□80	FCL10A	L7SA010B								
		□60	FB01A	L7SA001B				XLCS- P □ □ □ FS				
		□60	FB02A	L7SA002B								
		□60	FB04A	L7SA004B								
		□80	FC04A	L7SA004B								
		□80	FC06A	L7SA008B								
		□80	FC08A	L7SA008B								
		□80	FC10A	L7SA010B								
		□130	FE09A	L7SA010B								
		□130	FE15A	L7SA020B		XLCS- E □ □ □ DS	XLCS- E □ □ □ DS1	XLCS- P □ □ □ HS	XLCS- P □ □ □ NB			
		□130	FE22A	L7SA020B								
		□130	FE30A	L7SA035B				XLCS-P □ □ □ IS	XLCS-P □ □ □ PB			
		□180	FF30A	L7SA035B				XLCS-P □ □ □ JS	XLCS-P □ □ □ LB			
		□180	FF50A	L7SA050B								
		□80	FCL03D	L7SA004B		XLCS- E □ □ □ ES	XLCS- E □ □ □ ES1	XLCS- P □ □ □ LS		XLCS- P □ □ □ QS		
		□80	FCL05D	L7SA008B								
		□80	FCL06D	L7SA008B								
		□80	FCL07D	L7SA008B								
		□80	FC03D	L7SA004B								
		□80	FC05D	L7SA008B				XLCS- P □ □ □ FS				
		□80	FC06D	L7SA008B								
		□80	FC07D	L7SA008B								
		□130	FE06D	L7SA008B								
		□130	FE11D	L7SA010B	* 19Bit Serial / M-Turn Abs			XLCS- P □ □ □ HS	XLCS- P □ □ □ NB			
		□130	FE16D	L7								

XDL-L7SB Serial Type


Rated Speed (rpm)	Maximum Speed (rpm)	Flange Size	Applicable Motor	Applicable Drive	Standard Encoder Type	Encoder Cable		Power Cable			
					Serial Type	Serial	Abs	For power	Power + Brake	Brake	
3,000	5,000	□ 130	FEP09A	L7SB010B	* 19Bit Serial / M-Turn Abs	XLCS-E□□□DS	XLCS-E□□□DS1	XLCS-P□□□HS	XLCS-P□□□NB		
		□ 130	FEP15A	L7SB020B							
		□ 130	FEP22A	L7SB035B							
		□ 130	FEP30A	L7SB035B							
		□ 180	FFP30A	L7SB035B				XLCS-P□□□IS	XLCS-P□□□PB		
		□ 180	FFP50A	L7SB050B							
2,000	3,000	□ 130	FEP06D	L7SB010B				XLCS-P□□□HS	XLCS-P□□□NB		
		□ 130	FEP11D	L7SB010B							
		□ 130	FEP16D	L7SB020B							
		□ 130	FEP22D	L7SB020B							
		□ 180	FFP22D	L7SB020B				XLCS-P□□□IS	XLCS-P□□□PB		
		□ 180	FFP35D	L7SB035B							
		□ 180	FFP55D	L7SB050B				XLCS-P□□□JS	XLCS-P□□□LB		
	2,500	□ 180	FFP75D	L7SB075B							
	3,000	□ 220	FGP22D	L7SB020B				XLCS-P□□□IS		XLCS-P□□□SB	
		□ 220	FGP35D	L7SB035B							
		□ 220	FGP55D	L7SB050B							
	2,500	□ 220	FGP75D	L7SB075B				XLCS-P□□□JS			
		□ 220	FGP110D	L7SB150B							
1,500	3,000	□ 130	FEP05G	L7SB010B				XLCS-P□□□HS	XLCS-P□□□NB		
		□ 130	FEP09G	L7SB010B							
		□ 130	FEP13G	L7SB020B							
		□ 130	FEP17G	L7SB020B							
		□ 180	FFP20G	L7SB020B				XLCS-P□□□IS	XLCS-P□□□PB		
	2,700	□ 180	FFP30G	L7SB035B							
	3,000	□ 180	FFP44G	L7SB050B				XLCS-P□□□JS	XLCS-P□□□LB		
	2,500	□ 180	FFP60G	L7SB075B							
	2,200	□ 180	FFP75G	L7SB075B							

XDL-L7SB Drive

Item		Type Name	XDL-L7SB010 □	XDL-L7SB020 □	XDL-L7SB035 □	XDL-L7SB050 □	XDL-L7SB075 □	XDL-L7SB150 □
Input Power	Main Power Supply		3 Phase AC380 ~ 480[V](-15 ~ +10[%]), 50 ~ 60[Hz]					
	Control Power Supply		Single Phase AC380 ~ 480[V](-15 ~ +10[%]), 50 ~ 60[Hz]					
Rated Current[A]			3.7	8	10.1	17.5	22.8	39
Peak Current[A]			11.1	24	30.3	52.5	57	97.5
Encoder Type			Quad. Type Incremental Line Driver Max 6000 [P/R] Serial Type 19Bit					
Control Performance	Speed Control	Speed Control Range	Maximum 1: 5000					
		Frequency Response	Maximum 1 [kHz] or above (when the 19-bit serial encoder is applied)					
		Speed Command	DC -10 [V]~+10 [V] (Reverse rotation in case of negative voltage)					
		Accel/Decel Time	Straight or S-curve acceleration/deceleration (0-10,000 [ms], possible to be set by one [ms] unit)					
		Speed Variation Ratio	±0.01 [%] or lower [when load changes between 0 and 100%], ±0.1[%] or lower [temperature 25 ± 10°C]					
	Position Control	Input Frequency	1[Mpps], Line Driver / 200[kpps], Open Collector					
		Input Pulse Type	Symbol + pulse series, CW+CCW, A/B phase					
		Electric Gear Ratio	Four digital gear ratios can be set, selected and tuned.					
	Torque Control	Torque Command	DC-10~+10 [V] (Reverse direction torque in case of negative voltage)					
		Speed Limit	DC 0~10 [V], internal speed command within ±1[%]					
		Repetition accuracy	Within ±1[%]					
Input/Output Signal	Analog Input	Input Range	DC 0 ~ 10[V]					
		Resolution	12[bit]					
	Analog Output	Output Range	DC 0 ~ 10[V]					
		Resolution	12[bit]					
	Digital Input		A total of 10 input channels (allocable) SVON, SPD1, SPD2, SPD3, ALMRST, DIR, CCWLIM, CWLIM, EMG, STOP, EGEAR1, EGEAR2, PCON, GAIN2, P_CLR, T_LMT, MODE, ABS_RQ, ZCLAMP You can selectively allocate a total of 19 functions. You can set the positive/negative logic of the selected signal.					
	Digital Output		A total of 5 channels (allocable), 3 channels (fixed with alarm codes) ALARM, READY, ZSPD, BRAKE, INPOS, TLMT, VLMT, INSPD, WARN You can selectively allocate a total of nine kinds of output. You can set the positive/negative logic of the selected signal.					
Communication	RS-422		Accessible to PC software and the RS422 server					
	USB		Status monitoring through PC software, JOG operation, and parameter uploading/downloading are possible.					
Encoder			Serial BiSS encoder and quadrature encoder supported					
Encoder Output Type			Random pre-scale output through FPGA (maximum 6.4 Mpps)					
Built-in functions	Dynamic Braking		Standard built-in (activated when the servo alarm goes off or when the servo is off)					
		Regenerative Braking	Both default built-in and external installation possible					
	Display		Seven segments (5 DIGIT)					


XDL-L7SA001 ~ XDL-L7SA004 [Weight 1.2kg]

*Unit [mm]

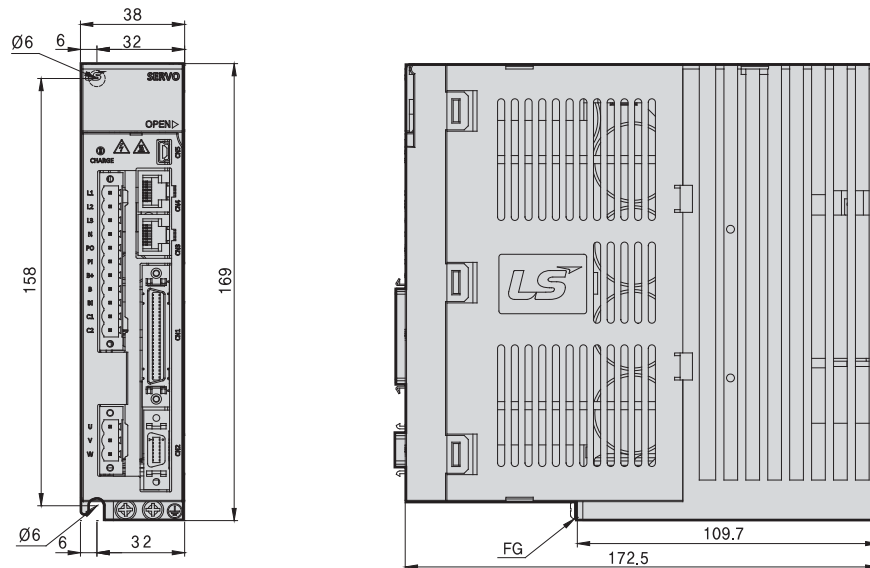


XDL-L7SA008 ~ XDL-L7SA010 [Weight : 1.5kg(Fan-Cooling included)]

*Unit [mm]

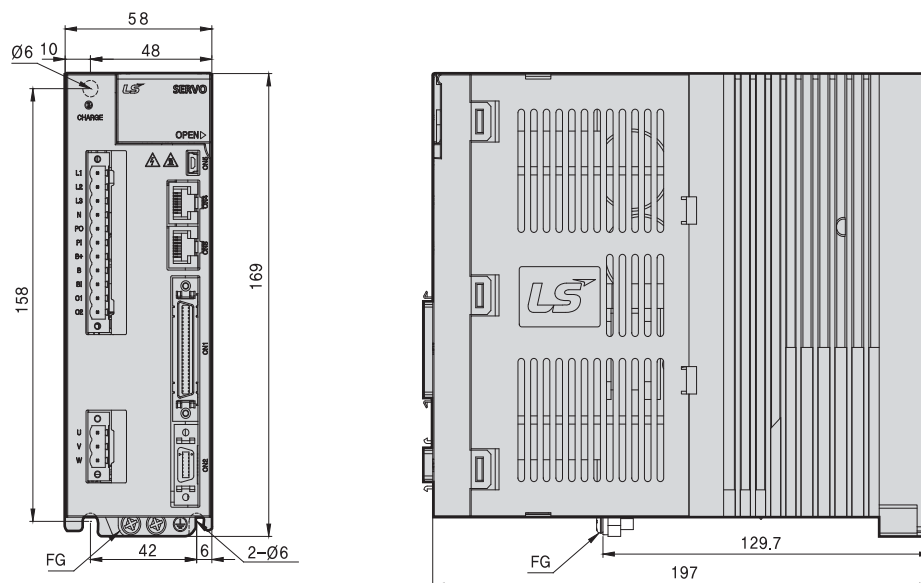


XDL-L7SA020 ~ XDL-L7SA035 [Weight : 2.5kg(Fan-Cooling included)]

*Unit [mm]

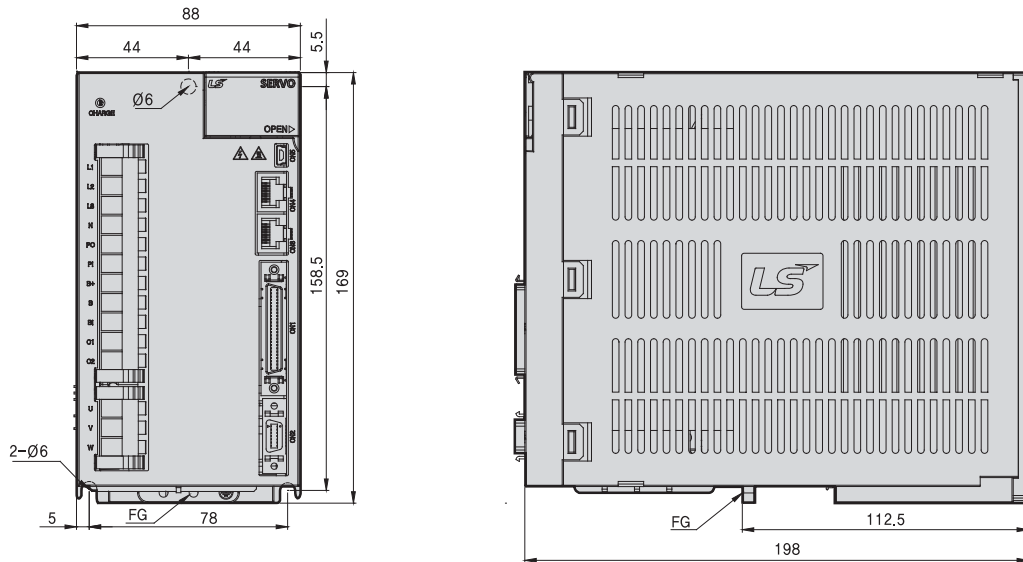



XDL-L7SA050 [Weight : 5.5kg(Fan-Cooling included)]

*Unit [mm]


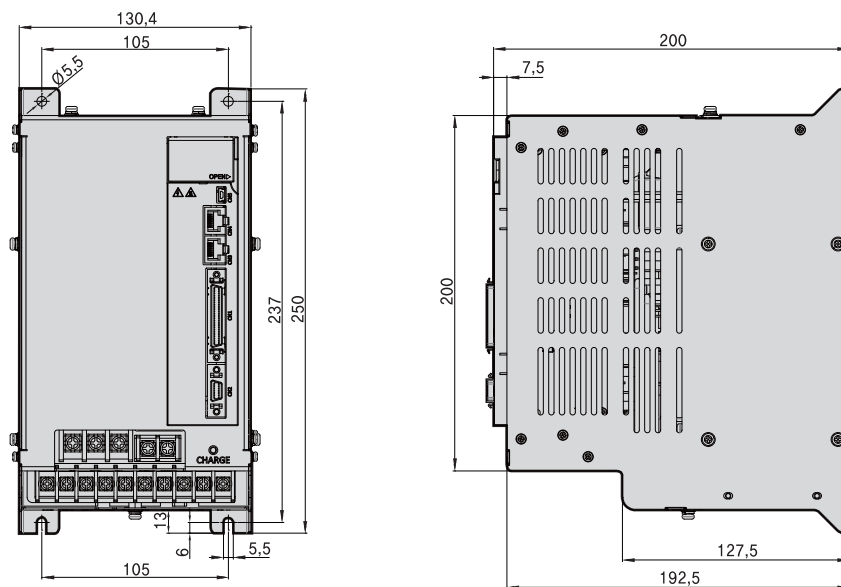


XDL-L7SB010 [Weight : 1.5kg(Fan-Cooling included)]

*Unit [mm]

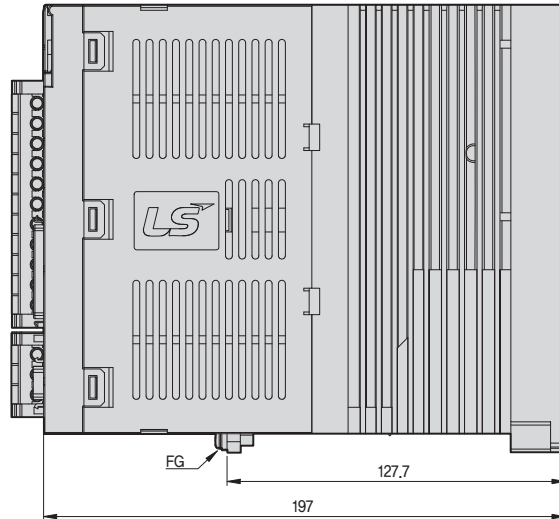
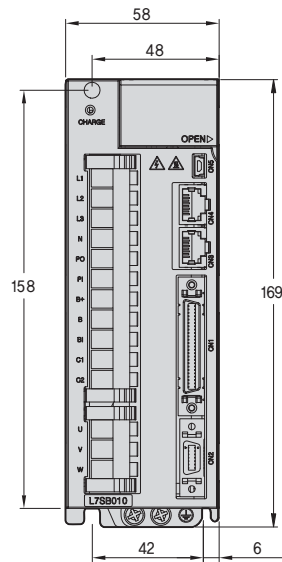
**XDL-L7SB020** / **XDL-L7SB035** [Weight : 2.5kg(Fan-Cooling included)]

*Unit [mm]

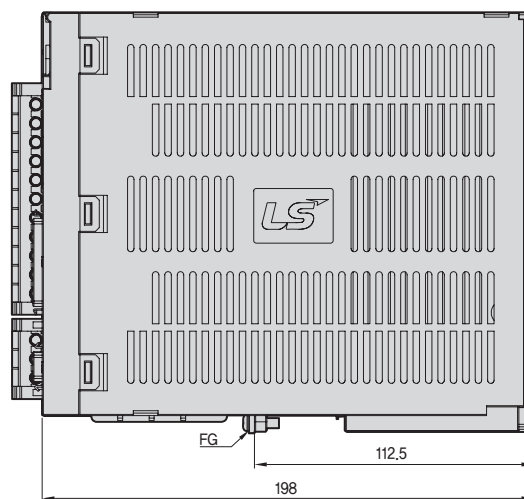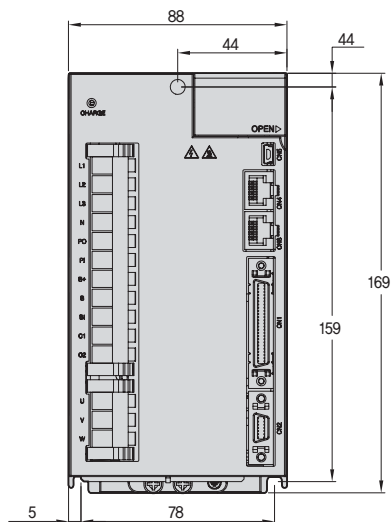



XDL-L7SB050 [Weight : 5.5kg(Fan-Cooling included)]

*Unit [mm]

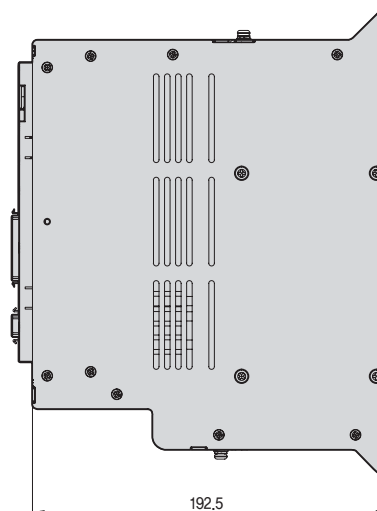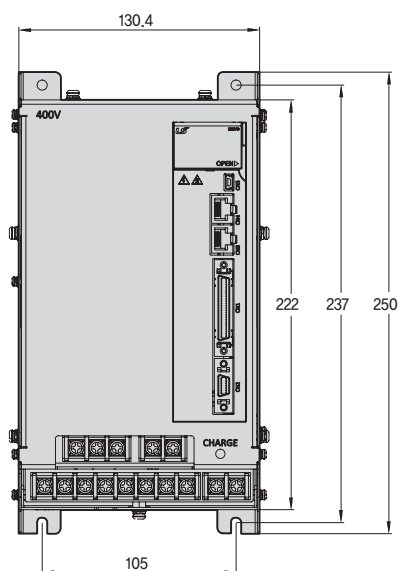

XDL-L7SA075 [Weight : 8.5kg(Fan-Cooling included)]

*Unit [mm]

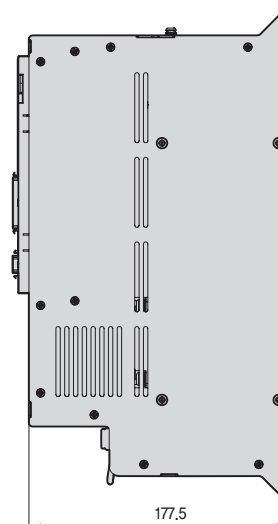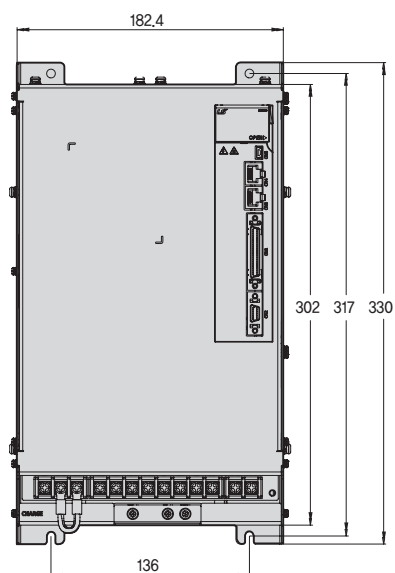

XDL-L7N Series



Servo Drive Designation

XDL	-	L7	N	A	004	B	AA
Model Name		Communication	Input Power Supply	Capacity	Encoder Type	Option	
XDL Series		Network Type	A : 200VAC	001 : 100W 002 : 200W 004 : 400W 008 : 750W 010 : 1.0kW 020 : 2.0kW 035 : 3.5kW 050 : 5.0kW	B : Serial (Communication Type)	Exclusive Option Code	

EtherCAT Communication Type XDL-L7N

Real-time control by EtherCAT

- High speed, Real-time capability and Synchronization mechanism
- 100BASE-TX(100Mbps) EtherNET based real-time communication


Support Various Operation Mode

- Cyclic(P/S/T) Mode and Profile (P/S/T)Mode, Homing Mode

High Response for Precision Control

- High Resolutions Serial type Encoder(19Bit, BiSS)
- Improved Speed Response(=1KHz) Frequency

- 1 Operation keys (Mode, Up, Down, Set)
- 2 Charge lamp
- 3 Main power connector (L1, L2, L3)
- 4 DC reactor connector(PO, PI)
 - Short circuit when not used
- 5 Regenerative Resistor Connector (B+, B, BI)
 - Short-Circuit B, BI terminals when standard type
 - Use B+, B terminals when using external resistor
- 6 Control Power Connector (C1, C2)
- 7 Front cover
- 8 Servo Motor Connecting Terminals (U, V, W)
- 9 Heat Sink
- 10 Display
- 11 Status LED
- 12 CN5:USB connector
- 13 CN4:EtherCAT Communication Port (IN)
- 14 CN3:EtherCAT Communication Port (OUT)
- 15 CN6 : STO Connector
- 16 CN1 : Control Signal Connector
- 17 CN2 : Encoder Signal Connector
- 18 Ground

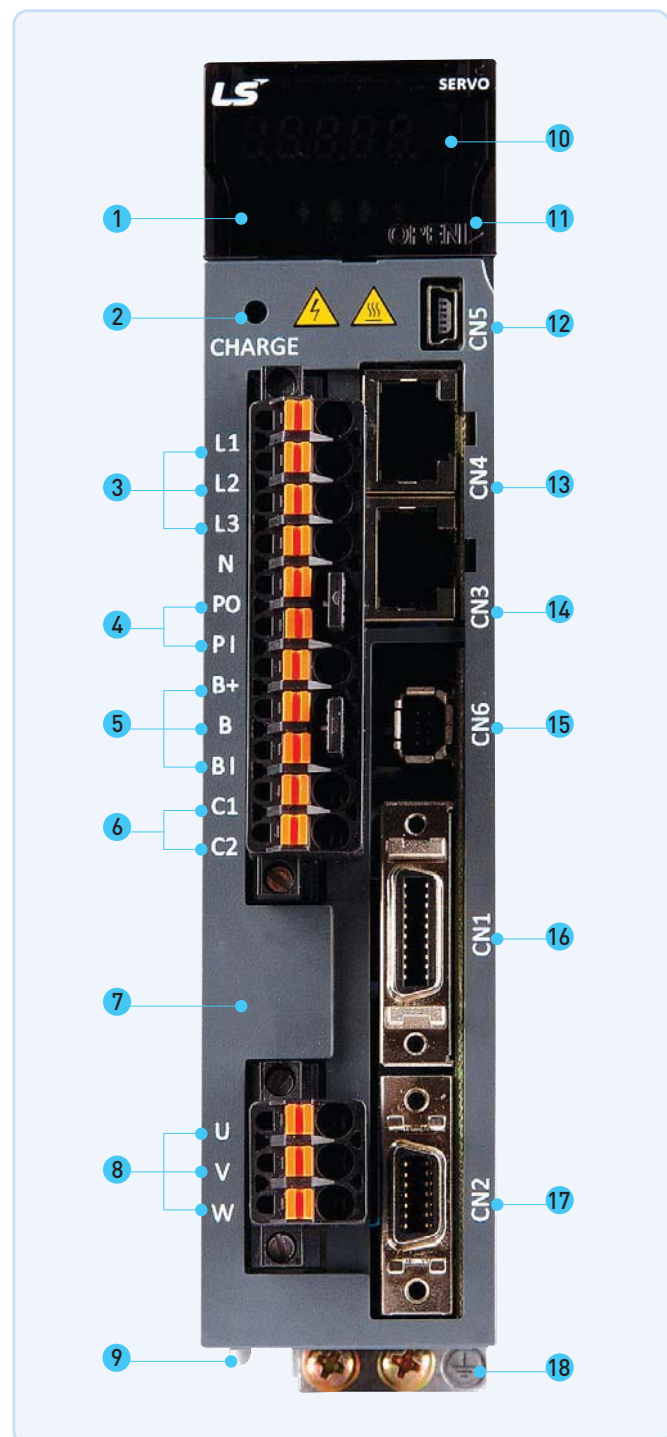

XDL-L7N Serial Type



Rated Speed (rpm)	Maximum Speed (rpm)	Flange Size	Applicable Motor	Applicable Drive	Standard Encoder Type	Encoder Cable		Power Cable				
					Serial Type	Serial	Abs	For power	Power + Brake	Brake		
3,000	5,000	□ 40	FALR5A	L7NA001B	* 18Bit Serial / M-Turn Abs	XLCS- E □ □ □ ES	XLCS- E □ □ □ ES1	XLCS- P □ □ □ LS		XLCS- P □ □ □ QS		
		□ 40	FAL01A	L7NA001B								
		□ 40	FAL015A	L7NA002B								
		□ 60	FBL01A	L7NA001B								
		□ 60	FBL02A	L7NA002B								
		□ 60	FBL04A	L7NA004B								
		□ 80	FCL04A	L7NA004B								
		□ 80	FCL06A	L7NA008B								
		□ 80	FCL08A	L7NA008B								
		□ 80	FCL10A	L7NA010B								
		□ 60	FB01A	L7NA001B				XLCS- P □ □ □ FS				
		□ 60	FB02A	L7NA002B								
		□ 60	FB04A	L7NA004B								
		□ 80	FC04A	L7NA004B								
		□ 80	FC06A	L7NA008B								
		□ 80	FC08A	L7NA008B								
		□ 80	FC10A	L7NA010B								
		□ 130	FE09A	L7NA010B								
		□ 130	FE15A	L7NA020B		XLCS- E □ □ □ DS	XLCS- E □ □ □ DS1	XLCS- P □ □ □ HS	XLCS- P □ □ □ NB			
		□ 130	FE22A	L7NA020B				XLCS-P □ □ □ S	XLCS-P □ □ □ PB			
		□ 130	FE30A	L7NA035B				XLCS-P □ □ □ JS	XLCS-P □ □ □ LB			
		□ 180	FF30A	L7NA035B								
		□ 180	FF50A	L7NA050B		XLCS- E □ □ □ ES	XLCS- E □ □ □ ES1	XLCS- P □ □ □ LS		XLCS- P □ □ □ QS		
		□ 80	FCL03D	L7NA004B								
		□ 80	FCL05D	L7NA008B								
		□ 80	FCL06D	L7NA008B								
		□ 80	FCL07D	L7NA008B								
		□ 80										

XDL-L7NA Drive

Item		Type Name	XDL-L7NA001B	XDL-L7NA002B	XDL-L7NA004B	XDL-L7NA008B	XDL-L7NA010B	XDL-L7NA020B	XDL-L7NA035B	XDL-L7NA050B
Input Power	Main Power Supply	3 Phase AC200 ~ 230[V](-15 ~ +10[%]), 50 ~ 60[Hz]								
	Control Power Supply	Single Phase AC200 ~ 230[V](-15 ~ +10[%]), 50 ~ 60[Hz]								
Rated Current[A]			1.4	1.7	3.0	5.2	6.75	13.5	16.7	32
Peak Current[A]			4.2	5.1	9.0	15.6	20.25	40.5	50.1	96
Encoder Type		Quad. Type Incremental Line Driver Max 6000 [P/R] Serial Type 19Bit								
Control Performance	Speed Control Range	Maximum 1: 5000								
	Frequency Response	Maximum 1 kHz or more (when the 19-bit serial encoder is applied)								
	Speed Variation Ratio	±0.01[%] or lower(When the load changes between 0 and 100%), ±0.1[%] or less(Temperature of 25°C[±10])								
	Torque Control Repetition Accuracy	Within ±1%								
Supported Drive Modes (CiA402)		Profile Position Mode Profile Velocity Mode Profile Torque Mode Interpolated Position Mode Cyclic Synchronous Position Mode Cyclic Synchronous Velocity Mode Cyclic Synchronous Torque Mode Homing Mode								
Digital Input/Output	Digital Input	Total 6 input channels (allocable) PCON, GAIN2, ALMRST, HOME, P-OT, N-OT Above 6 functions can be used selectively for assignment. Signal can be set as positive logic or negative logic.								
	Touch Probe Input	There are 2 input channels. Provides rising and falling edge detection functions for each channel.								
	Digital Output	Total 4 channels (allocable) ALARM, READY, ZSPD, BRAKE, INPOS, INSPD, WARN Above 7 outputs can be used selectively for assignment. Signal can be set as positive logic or negative logic.								
Additional Communication	USB	Program download is available with USB Communication.								
Built-in Functions	Dynamic Braking	Built-in type(operates when Servo alarm or Servo off)								
	Regenerative Braking	Built-in type, and also external connection is available								
	Display	7 segments(5DIGIT)								
	Setting Function	Loder(SET), (MODE)								
	Additional Function	Auto gain tuning function								
	Protective Function	Overcurrent, overload, overvoltage, insufficient voltage, main power input problem, control power input problem, overspeed, motor cable, overheat(power module overheat, abnormal drive operation ⁰ s temp), encoder problem, over-regenerative, sensor problem, communication problem								
Operation Environment	Temperature	0 ~ 50[°C]								
	Humidity	Below 90[%]RH(avoid dew-condensation)								
	Environment	Indoor, Avoid corrosive, inflammable gas or liquid, and electrically conductive dust.								



XDL-L7NA001B ~ XDL-L7NA004B[Weight : 1.2kg]

*Unit [mm]

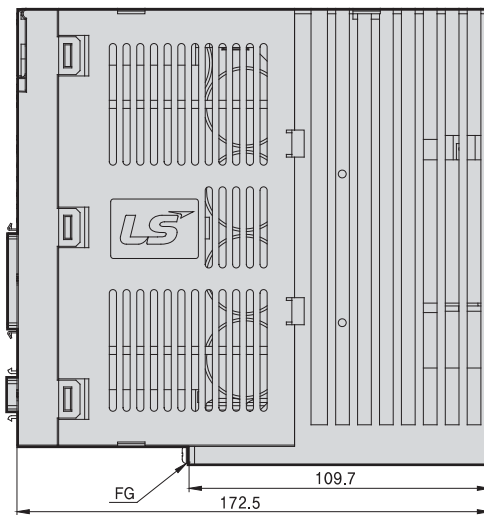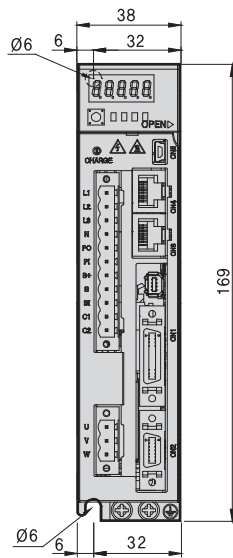


XDL-L7NA008B / XDL-L7NA010B[Weight : 1.5kg(Fan-Cooling included)]

*Unit [mm]

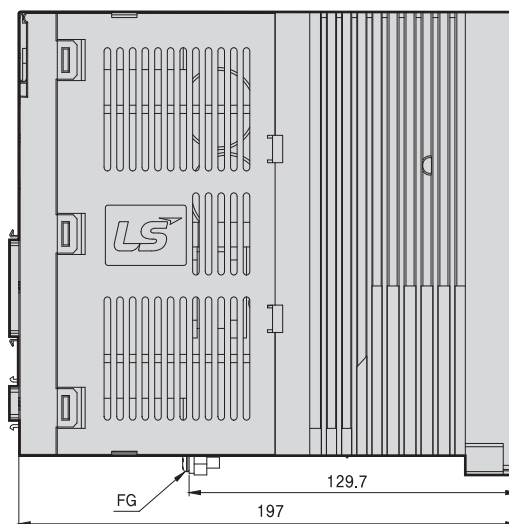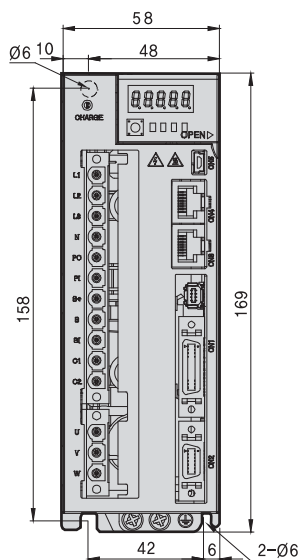


XDL-L7NA020B / XDL-L7NA035B[Weight : 2.5kg(Fan-Cooling included)]

*Unit [mm]

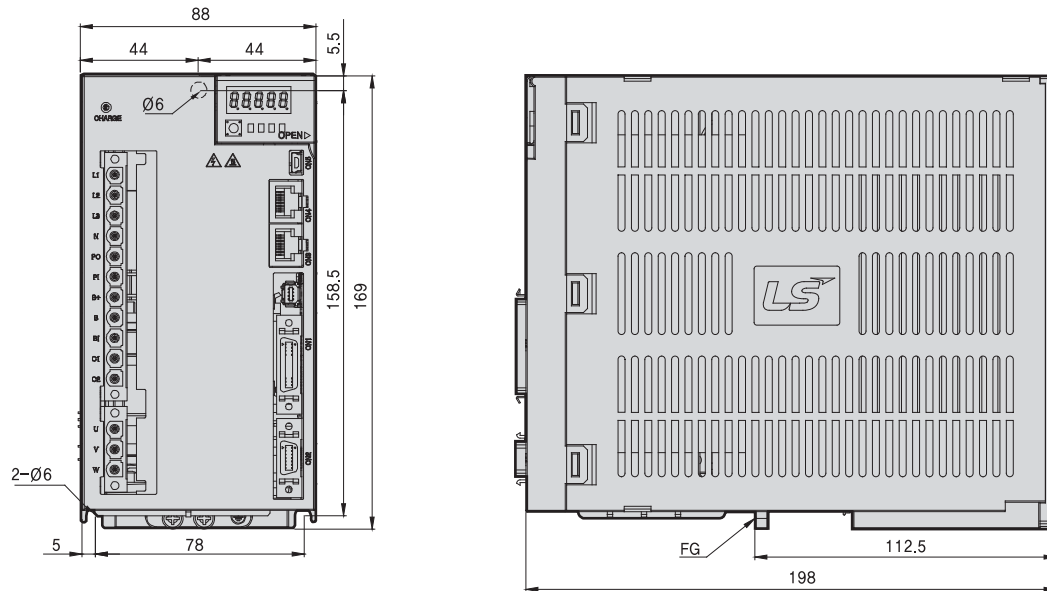**XDL-L7NA050B[Weight : 5.5kg(Fan-Cooling included)]**

*Unit [mm]

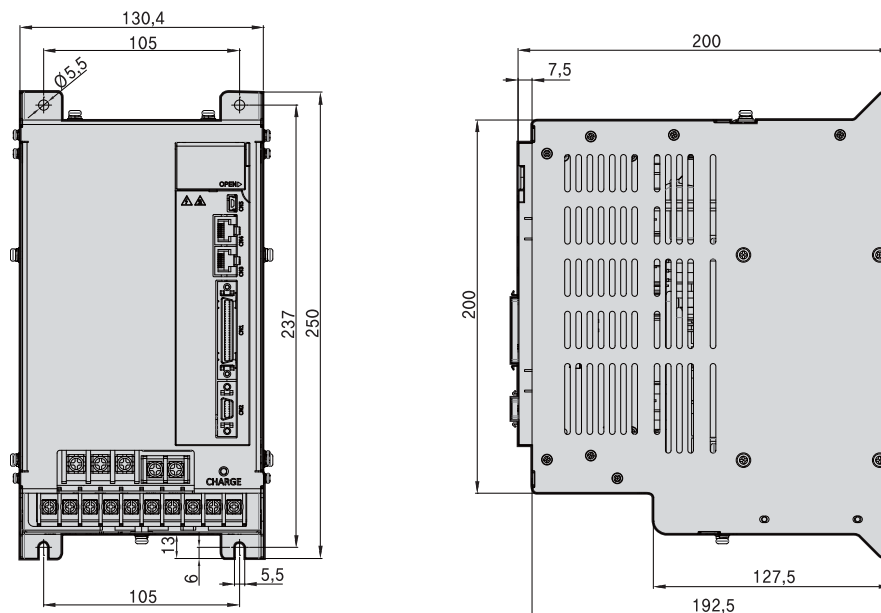

XDL-L7NH Series



Servo Drive Designation

XDL	-	L7	NH	A	004	B	AA
Model Name		Communication	Input Power Supply	Capacity	Encoder Type	Option	
XDL Series		Network / All-in-One Type	A:200VAC B:400VAC	001:100W 002:200W 004:400W 008:750W 010:1.0kW 020:2.0kW 035:3.5kW 050:5.0kW 075:7.5kW 110:11kW 150:15kW	U:Universal	Exclusive Option Code	

* Range

- 200V : 0.1kW~3.5kW
- 400V : 1.0kW~15kW

All-in-One EtherCAT Communication Type XDL-L7NH

Real-time control through EtherCAT

- High speed, Real-time capability and Synchronization mechanism
- Improved EtherCAT communication speed (min. 250us, DC support)
- Supporting CoE, EoE and FoE
- Improved Speed Response(=1.6Khz) Frequency


Support various motor and Encoder drive

- Supporting Rotary, DD and Motor drive (supporting 3rd party motor)
- Quadrature, BiSS-C, Tamagawa serial abs, EnDat 2.2, Resolver

Improved Control Performance

- Improved Control bandwidth
- Providing 4-step Notch-Filter
- Vibration control by Real-time FET
- Real-time gain tuning function

- 1 Display
- 2 State LED
- 3 Charge Lamp
- 4 Main Power Connector (L1, L2, L3)
- 5 DC Reactor Connector (PO, PI)
- 6 Regenerative Resistance Connector (B+, B, BI)
 - Short-Circuit B, BI terminals when standard type
 - Use B+, B terminals when using external resistor
- 7 Control Power Connector (C1, C2)
- 8 Servo Motor Connecting Terminal (U,V,W)
- 9 Connector for Analog Monitor
- 10 Node Address Setting Switch
- 11 USB Connector
- 12 EtherCAT Communication Port (IN)
- 13 EtherCAT Communication Port (OUT)
- 14 Safety Connector (STO)
- 15 Input / Output signal /Connector
- 16 Encoder Connector (ENCODER)
- 17 Ground Terminal

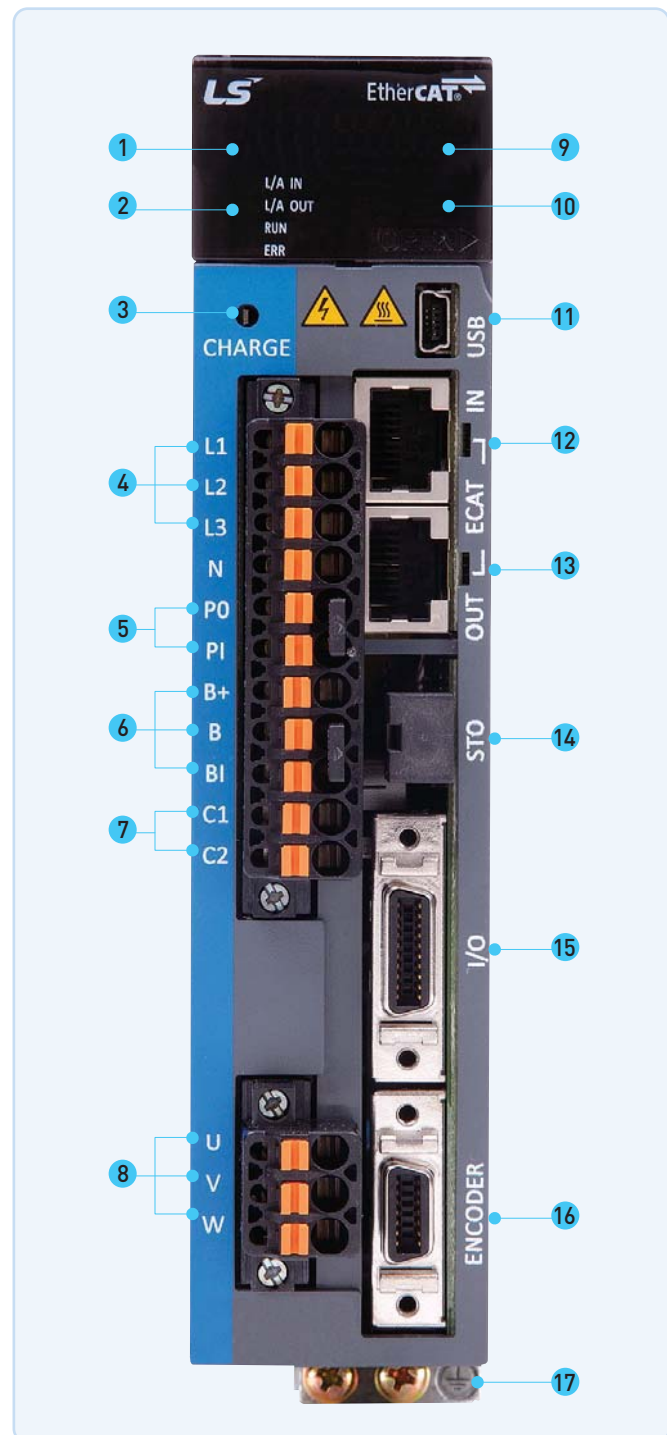

XDL-L7NHA Incremental Type

Rated Speed (rpm)	Maximum Speed (rpm)	Flange Size	Applicable Motor	Applicable Drive	Standard Encoder Type	Encoder Cable	Power Cable		
					Quadrature Type	INC	For power	Power + Brake	Brake
3,000	5,000	□40	SAR3A	L7NHA001U	* 2,048P/R	XLCS-E□□□AS	XLCS-P□□□GS	XLCS-P□□□NB	XLCS-P□□□KB
		□40	SAR5A	L7NHA001U					
		□40	SA01A	L7NHA001U					
		□40	SA015A	L7NHA002U					
		□60	SB01A	L7NHA002U					
		□60	SB02A	L7NHA002U					
		□60	SB04A	L7NHA004U					
		□80	SC04A	L7NHA004U					
		□80	SC06A	L7NHA008U					
		□80	SC08A	L7NHA008U					
		□80	SC10A	L7NHA010U					
		□130	SE09A	L7NHA008U		XLCS-E□□□BS	XLCS-P□□□HS	XLCS-P□□□NB	
		□130	SE15A	L7NHA020U					
		□130	SE22A	L7NHA020U					
		□180	SF30A	L7NHA035U					
2,000	3,000	□80	SC03D	L7NHA004U	* 3,000P/R	XLCS-E□□□AS	XLCS-P□□□GS	XLCS-P□□□NB	XLCS-P□□□QS
		□80	SC05D	L7NHA008U					
		□80	SC06D	L7NHA008U					
		□80	SC07D	L7NHA008U					
		□130	SE06D	L7NHA008U					
		□130	SE11D	L7NHA010U					
		□130	SE16D	L7NHA020U					
		□130	SE22D	L7NHA020U					
		□180	SF22D	L7NHA020U					
		□180	LF35D	L7NHA035U					
		□220	SG22D	L7NHA020U					
		□220	LG35D	L7NHA035U					
		□130	SE05G	L7NHA008U		XLCS-E□□□BS	XLCS-P□□□HS	XLCS-P□□□NB	XLCS-P□□□SB
		□130	SE09G	L7NHA010U					
		□130	SE13G	L7NHA020U					

XDL-L7NHA Serial Type

Rated Speed (rpm)	Maximum Speed (rpm)	Flange Size	Applicable Motor	Applicable Drive	Standard Encoder Type	Encoder Cable		Power Cable				
					Serial Type	Serial	Abs	For power	Power + Brake	Brake		
3,000	5,000	□40	FALR5A	L7NHA001U	* 18Bit Serial / M-Turn Abs	XLCS- E□□□ES	XLCS- E□□□ES1	XLCS- P□□□LS		XLCS- P□□□QS		
		□40	FAL01A	L7NHA001U								
		□40	FAL015A	L7NHA002U								
		□60	FBL01A	L7NHA001U								
		□60	FBL02A	L7NHA002U								
		□60	FBL04A	L7NHA004U								
		□80	FCL04A	L7NHA004U								
		□80	FCL06A	L7NHA008U								
		□80	FCL08A	L7NHA008U								
		□80	FCL10A	L7NHA010U								
		□60	FB01A	L7NHA001U				XLCS- P□□□FS				
		□60	FB02A	L7NHA002U								
		□60	FB04A	L7NHA004U								
		□80	FC04A	L7NHA004U								
		□80	FC06A	L7NHA008U								
		□80	FC08A	L7NHA008U								
		□80	FC10A	L7NHA010U								
		□130	FE09A	L7NHA010U								
		□130	FE15A	L7NHA020U		XLCS- E□□□DS	XLCS- E□□□DS1	XLCS- P□□□HS	XLCS- P□□□NB			
		□130	FE22A	L7NHA020U								
		□130	FE30A	L7NHA035U				XLCS-P□□□S	XLCS-P□□□PB			
		□180	FF30A	L7NHA035U								
2,000	3,000	□80	FCL03D	L7NHA004U	* 19Bit Serial / M-Turn Abs	XLCS- E□□□ES	XLCS- E□□□ES1	XLCS- P□□□LS		XLCS- P□□□QS		
		□80	FCL05D	L7NHA008U				XLCS- P□□□FS				
		□80	FCL06D	L7NHA008U								
		□80	FCL07D	L7NHA008U								
		□80	FC03D	L7NHA004U								

XDL-L7NHB Incremental Type

Rated Speed (rpm)	Maximum Speed (rpm)	Flange Size	Applicable Motor	Applicable Drive	Standard Encoder Type	Encoder Cable	Power Cable		
					Quadrature Type	INC	For power	Power + Brake	Brake
3,000	5,000	□ 130	SEP09A	L7NHB010U	* 3,000P/R	XLCS- E □ □ □ BS	XLCS- P □ □ □ HS	XLCS- P □ □ □ NB	
		□ 130	SEP15A	L7NHB010U					
		□ 130	SEP22A	L7NHB020U					
		□ 130	SEP30A	L7NHB035U					
		□ 180	SFP30A	L7NHB035U			XLCS-P □ □ □ IS	XLCS-P □ □ □ PB	
		□ 180	SFP50A	L7NHB050U			XLCS-P □ □ □ JS	XLCS-P □ □ □ LB	
2,000	3,000	□ 130	SEP06D	L7NHB010U					
		□ 130	SEP11D	L7NHB010U					
		□ 130	SEP16D	L7NHB020U			XLCS- P □ □ □ HS	XLCS- P □ □ □ NB	
		□ 130	SEP22D	L7NHB020U					
		□ 180	SFP22D	L7NHB020U					
		□ 180	SFP35D	L7NHB035U			XLCS- P □ □ □ IS	XLCS- P □ □ □ PB	
		□ 180	SFP55D	L7NHB050U					
		□ 180	SFP75D	L7NHB075U			XLCS- P □ □ □ JS	XLCS- P □ □ □ LB	
		□ 220	SGP22D	L7NHB020U			XLCS- P □ □ □ IS		XLCS- P □ □ □ SB
		□ 220	SGP35D	L7NHB035U					
		□ 220	SGP55D	L7NHB050U			XLCS- P □ □ □ JS		
		□ 220	SGP75D	L7NHB075U			XLCS-P □ □ □ MS		
	2,500	□ 220	SGP110D	L7NHB150U					
1,500	3,000	□ 130	SEP05G	L7NHB010U					
		□ 130	SEP09G	L7NHB010U					
		□ 130	SEP13G	L7NHB020U			XLCS- P □ □ □ HS	XLCS- P □ □ □ NB	
		□ 130	SEP17G	L7NHB020U					
		□ 180	SFP20G	L7NHB020U			XLCS- P □ □ □ IS	XLCS- P □ □ □ PB	
		□ 180	SFP30G	L7NHB050U					
		□ 180	SFP44G	L7NHB050U			XLCS- P □ □ □ JS	XLCS- P □ □ □ LB	
		□ 180	SFP60G	L7NHB075U			XLCS-P □ □ □ MS		
	2,500	□ 180	SFP75G	L7NHB075U					XLCS- P □ □ □ SB
		□ 220	SGP20G	L7NHB020U			XLCS- P □ □ □ IS		
	3,0								

XDL-L7NHB Serial Type

Rated Speed (rpm)	Maximum Speed (rpm)	Flange Size	Applicable Motor	Applicable Drive	Standard Encoder Type	Encoder Cable		Power Cable		
					Serial Type	Serial	Abs	For power	Power + Brake	Brake
3,000	5,000	□130	FEP09A	L7NHB010U	* 19Bit Serial / M-Turn Abs	XLCS- E □ □ □ DS	XLCS- E □ □ □ DS1	XLCS- P □ □ □ HS	XLCS- P □ □ □ NB	
		□130	FEP15A	L7NHB020U						
		□130	FEP22A	L7NHB035U						
		□130	FEP30A	L7NHB035U						
		□180	FFP30A	L7NHB035U				XLCS-P □ □ □ IS	XLCS-P □ □ □ PB	
		□180	FFP50A	L7NHB050U				XLCS-P □ □ □ JS	XLCS-P □ □ □ LB	
2,000	3,000	□130	FEP06D	L7NHB010U						
		□130	FEP11D	L7NHB010U						
		□130	FEP16D	L7NHB020U				XLCS- P □ □ □ HS	XLCS- P □ □ □ NB	
		□130	FEP22D	L7NHB020U						
		□180	FFP22D	L7NHB020U				XLCS- P □ □ □ IS	XLCS- P □ □ □ PB	
		□180	FFP35D	L7NHB035U						
		□180	FFP55D	L7NHB050U				XLCS- P □ □ □ JS	XLCS- P □ □ □ LB	
	2,500	□180	FFP75D	L7NHB075U						XLCS- P □ □ □ SB
	3,000	□220	FGP22D	L7NHB020U				XLCS- P □ □ □ IS		
	2,700	□220	FGP35D	L7NHB035U						
	3,000	□220	FGP55D	L7NHB050U				XLCS- P □ □ □ JS		
	2,500	□220	FGP75D	L7NHB075U						
		□220	FGP110D	L7NHB150U				XLCS-P □ □ □ MS		
1,500	3,000	□130	FEP05G	L7NHB010U						
		□130	FEP09G	L7NHB010U						
		□130	FEP13G	L7NHB020U				XLCS- P □ □ □ HS	XLCS- P □ □ □ NB	
		□130	FEP17G	L7NHB020U						
		□180	FFP20G	L7NHB020U						
	2,700	□180	FFP30G	L7NHB050U				XLCS- P □ □ □ IS	XLCS- P □ □ □ PB	
	3,000	□180	FFP44G	L7NHB050U						
	2,500	□180	FFP60G	L7NHB075U				XLCS- P □ □ □ JS	XLCS- P □ □ □ LB	
	2,200	□180	FFP75G	L7NHB075U						

XDL-L7NHA Drive


Item		Type Name	XDL-L7NHA001U	XDL-L7NHA002U	XDL-L7NHA004U	XDL-L7NHA008U	XDL-L7NHA010U	XDL-L7NHA020U	XDL-L7NHA035U
Input Power	Main Power Supply	3 Phase AC200 ~ 230[V](-15 ~ +10[%]), 50 ~ 60[Hz]							
	Control Power Supply	Single Phase AC200 ~ 230[V](-15 ~ +10[%]), 50 ~ 60[Hz]							
Rated Current[A]			1.4	1.7	3.0	5.2	6.75	13.5	16.7
Peak Current[A]			4.2	5.1	9.0	15.6	20.25	40.5	50.1
Encoder Type		Quadrature(Incremental) BiSS-B, BiSS-C(Absolute, Incremental) Tamagawa Serial(Absolute, Incremental) EnDat 2.2							
Control Performance	Speed Control Range	Maximum 1: 5000							
	Frequency Response	Maximum 1[kHz] or above(When the 19-bit Serial Encoder is applied)							
	Speed Variation Ratio	$\pm 0.01[\%]$ or lower(When the load changes between 0 and 100%) $\pm 0.1[\%]$ or less(Temperature of 25°C[± 10])							
	Torque Control Repetition Accuracy	Within $\pm 1\%$							
EtherCAT Communication Specifications	Communication Standard	FoE (Firmware download) EoE (Parameter setting by UDP, Tuning, Secondary function, Parameter copy) CoE (IEC 61158 Type12, IEC 61800-7 CIA 402 Drive profile)							
	Physical Layer	100BASE-TX(IEEE802.3)							
	Connector	RJ45 x 2							
	Communication distance	Within connection between nodes 100[m]							
	DC(Distributed Clock)	By DC mode synchronism. minimum DC cycle: 250[us]							
	LED Display	LinkAct IN, LinkAct OUT, RUN, ERR							
	Cia402 Drive Profile	Profile Position Mode Profile Velocity Mode Profile Torque Mode Cyclic Synchronous Position Mode Cyclic Synchronous Velocity Mode Cyclic Synchronous Torque Mode Homing Mode							
Digital Input/ Output	Digital Input	Input Voltage range : DC 12[V] ~ DC 24[V] Total 8 input channels (allocable) Above 12 functions can be used selectively for assignment. (*POT, *NOT, *HOME, *STOP, *PCON, *GAIN2, *P_CL, *N_CL, PROBE1, PROBE2, EMG, A_RST) *Basic allocation signal							
	Digital Output	Service rating: DC 24[V] $\pm 10\%$, 120[mA] Total 4 input channels (allocable) Above 11 functions can be used selectively for assignment. (*BRAKE $\pm$, *ALARM $\pm$, *READY $\pm$, *ZSPD $\pm$, INPOS $\pm$, TLMT $\pm$, VLMT $\pm$, INSPD $\pm$, WARN $\pm$, TGON $\pm$, INPOS $\pm$) *Basic allocation signal							
Analog Monitor		There are 2 input channels. Above 15 functions can be used selectively for assignment.							
Safety Function									

XDL-L7NHB Drive

Item		Type Name	XDL-L7NHB010U	XDL-L7NHB020U	XDL-L7NHB035U	XDL-L7NHB050U	XDL-L7NHB075U	XDL-L7NHB150U
Input Power	Main Power Supply		3 Phase AC380 ~480[V](-15 ~ +10[%]), 50 ~ 60[Hz]					
	Control Power Supply		Single Phase AC380 ~ 480[V](-15 ~ +10[%]), 50 ~ 60[Hz]					
Rated Current[A]			3.7	8	10.1	17.5	22.8	39
Peak Current[A]			11.1	24	30.3	47.25	57	97.5
Encoder Type			Quadrature(Incremental) BiSS-B, BiSS-C(Absolute, Incremental) Tamagawa Serial(Absolute, Incremental) EnDat 2.2					
Control Performance	Speed Control Range		Maximum 1: 5000					
	Frequency Response		Maximum 1[kHz] or above(When the 19-bit Serial Encoder is applied)					
	Speed Variation Ratio		± 0.01 [%] or lower(When the load changes between 0 and 100%) ± 0.1 [%] or less(Temperature of 25°C[± 10])					
	Torque Control Repetition Accuracy		Within ± 1 %					
EtherCAT Communication Specifications	Communication Standard		FoE (Firmware download) EoE (Parameter setting by UDP, Tuning, Secondary function, Parameter copy) CoE (IEC 61158 Type12, IEC 61800-7 CIA 402 Drive profile)					
	Physical Layer		100BASE-TX(IEEE802.3)					
	Connector		RJ45 x 2					
	Communication distance		Within connection between nodes 100[m]					
	DC(Distributed Clock)		By DC mode synchronism. minimum DC cycle: 250[us]					
	LED Display		LinkAct IN, LinkAct OUT, RUN, ERR					
	Cia402 Drive Profile		Profile Position Mode					
			Profile Velocity Mode					
			Profile Torque Mode					
			Cyclic Synchronous Position Mode Cyclic Synchronous Velocity Mode Cyclic Synchronous Torque Mode Homing Mode					
Digital Input/ Output	Digital Input		Input Voltage range : DC 12[V] ~ DC 24[V] Total 8 input channels (allocable) Above 12 functions can be used selectively for assignment. (*POT, *NOT, *HOME, *STOP, *PCON, *GAIN2, *P_CL, *N_CL, PROBE1, PROBE2, EMG, A_RST) *Basic allocation signal					
	Digital Output		Service rating: DC 24[V] ± 10 %, 120[mA] Total 4 input channels (allocable) Above 11 functions can be used selectively for assignment. (*BRAKE $\pm$, *ALARM $\pm$, *READY $\pm$, *ZSPD $\pm$, INPOS $\pm$, TLMT $\pm$, VLMT $\pm$, INSPD $\pm$, WARN $\pm$, TGON $\pm$, INPOS $\pm$) *Basic allocation signal					
Analog Monitor			There are 2 input channels. Above 15 functions can be used selectively for assignment.					
Safety Function			2 Input Channels (STO1, STO2), 1 Output Channels (EDM $\pm$)					
USB Communication	Function		Firmware download, Parameter setting, Tuning, Secondary function, Parameter copy					
	Communication Standard		USB 2.0 Full Speed (applies standard)					
	Connect		PC or USB storing medium					
Internal Function	Dynamic Br							


XDL-L7NHA001U ~ XDL-L7NHA004U[Weight : 1.0kg]

*Unit [mm]

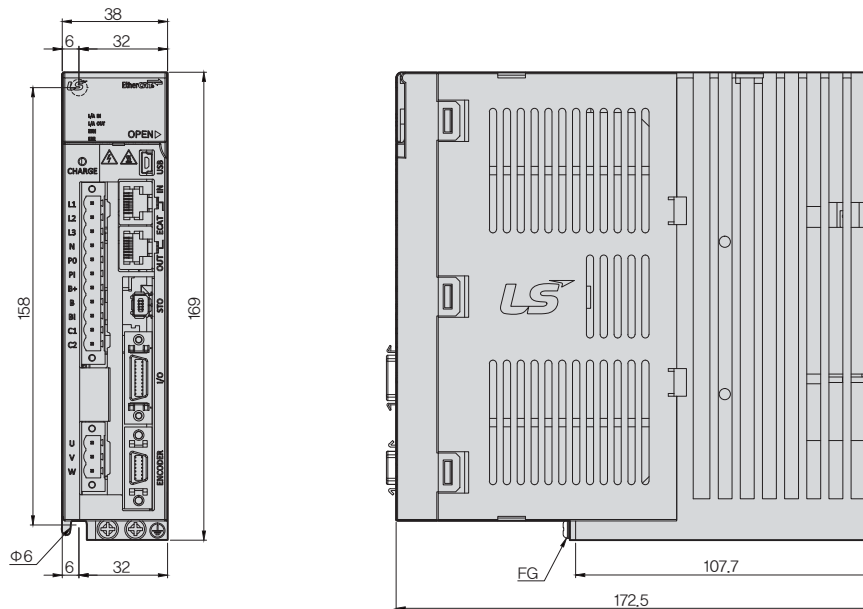



XDL-L7NHA008U / XDL-L7NHA010U[Weight : 1.5kg(Fan-Cooling included)]

*Unit [mm]


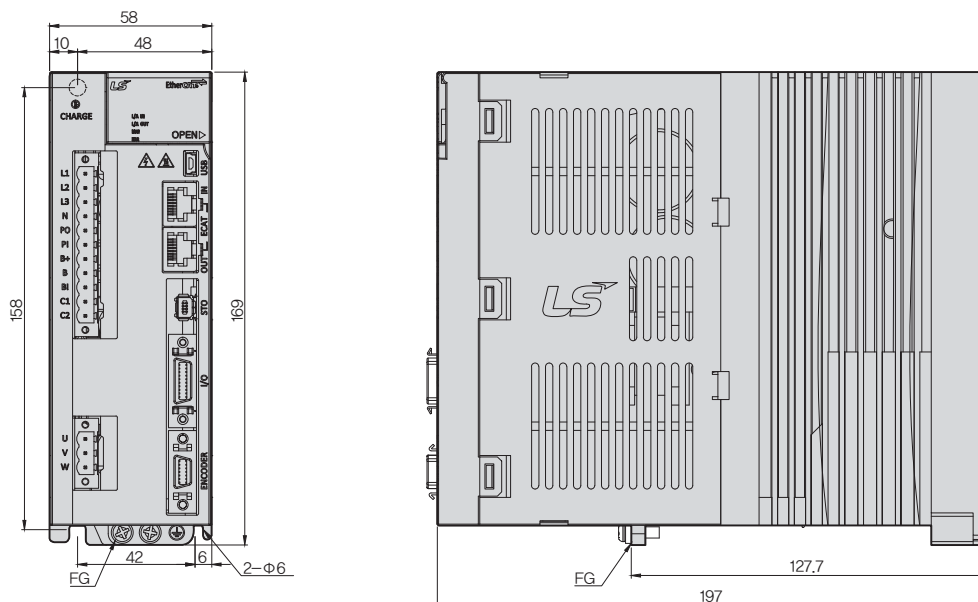


XDL-L7NHA020U / XDL-L7NHA035U[Weight : 2.5kg(Fan-Cooling included)]

*Unit [mm]

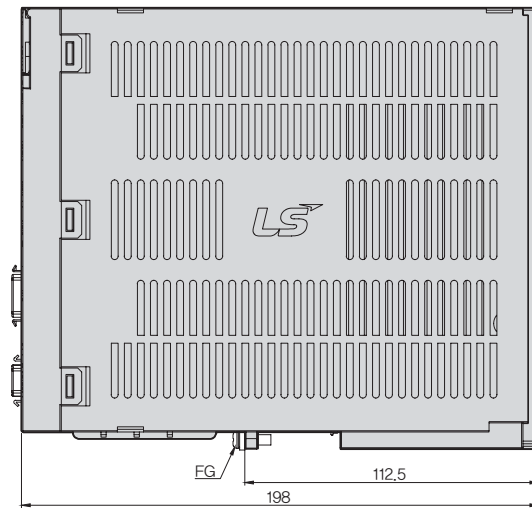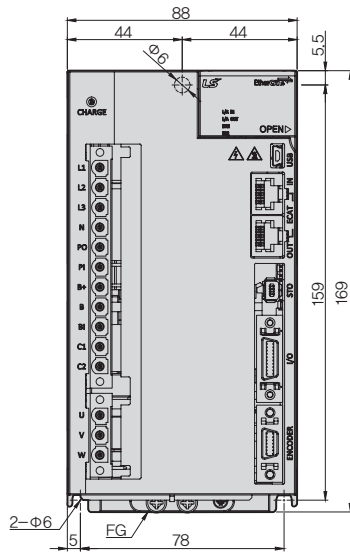
**XDL-L7NHB010U[Weight : 1.5kg(Fan-Cooling included)]**

*Unit [mm]

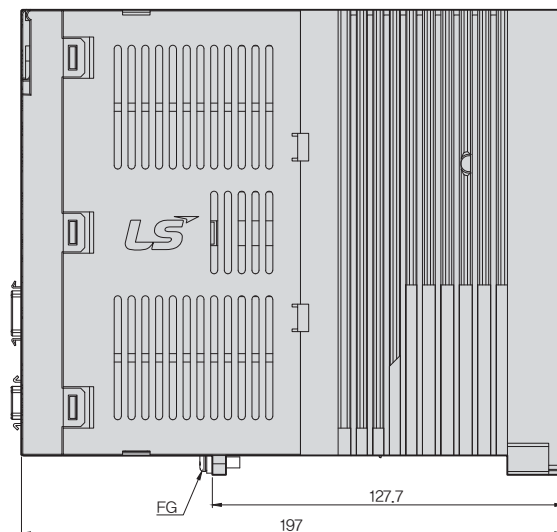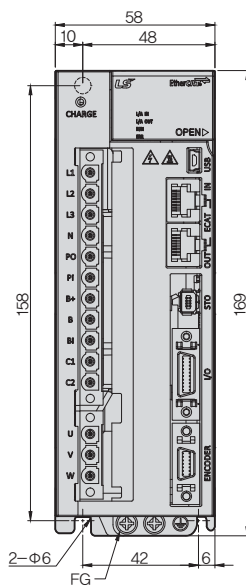


XDL-L7NHB020U / XDL-L7NHB035U [Weight : 2.5kg (Fan-Cooling included)]

*Unit [mm]

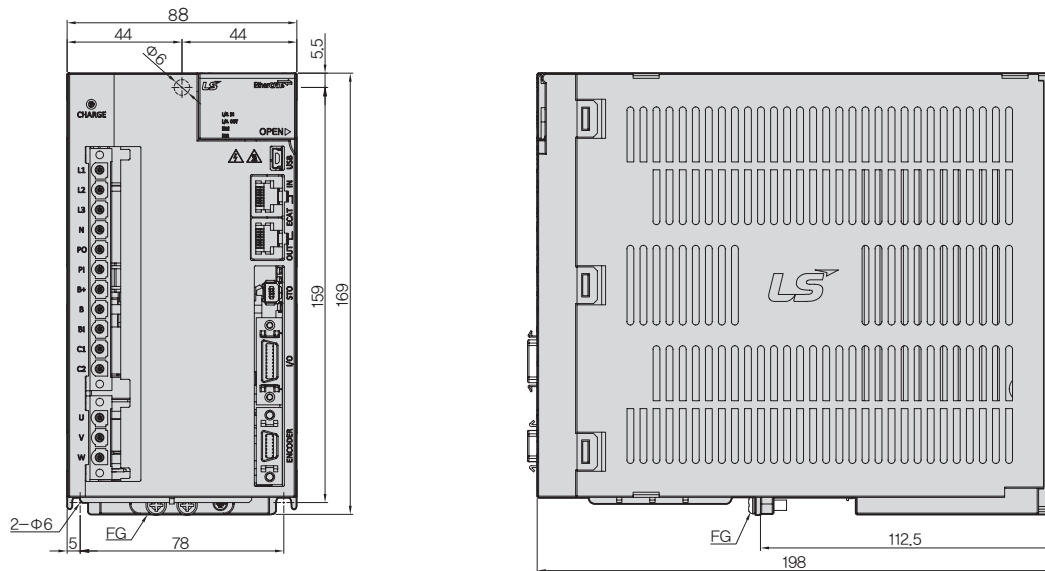


XDL-L7NB050U [Weight : 5.5kg (Fan-Cooling included)]

*Unit [mm]

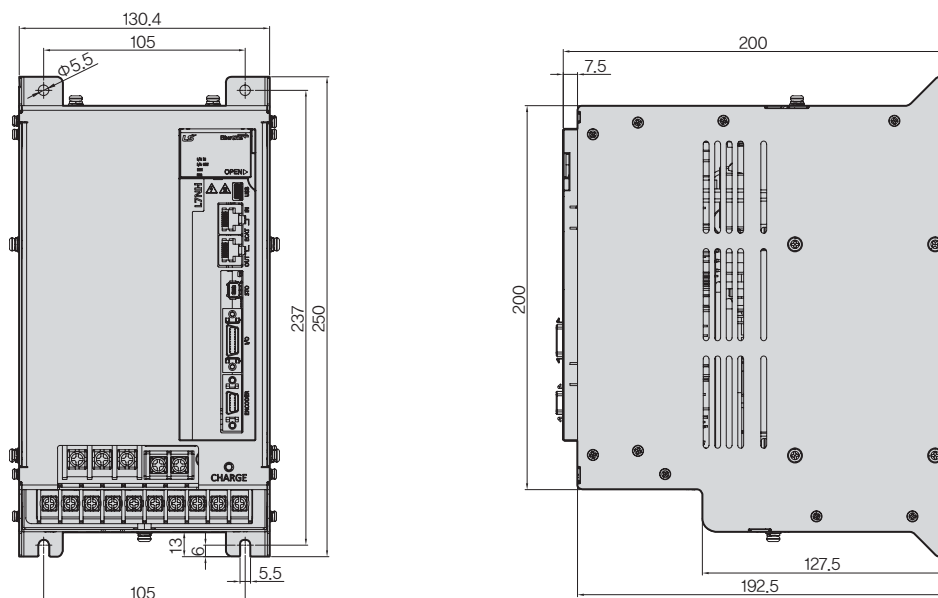


XDL-L7NHB075U[Weight : 8.5kg(Fan-Cooling included)]

*Unit [mm]

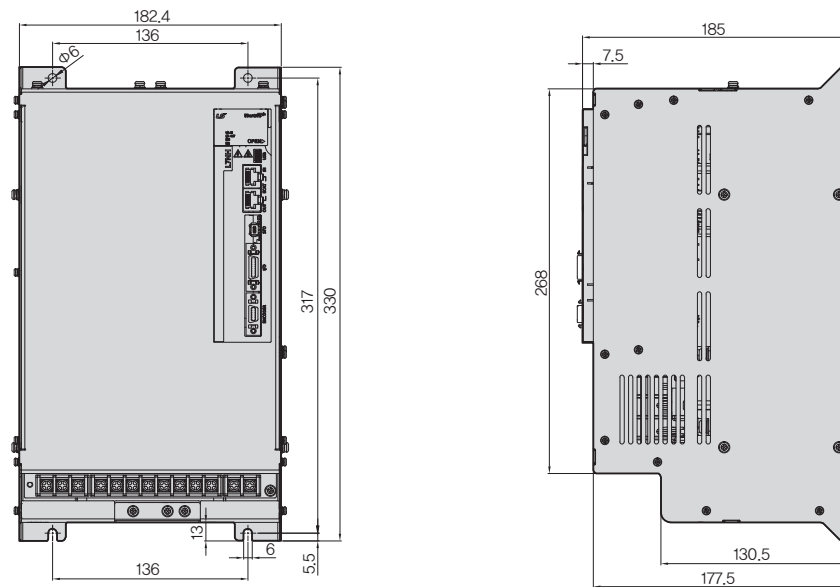**XDL-L7NHB150U[Weight : 15.5kg(Fan-Cooling included)]**

*Unit [mm]

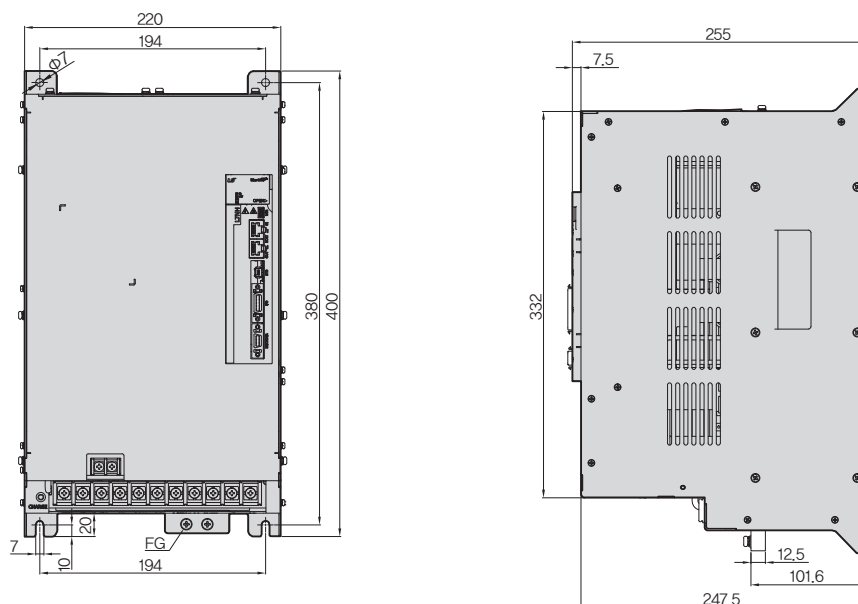

XDL-L7P Series



Servo Drive Designation

XDL	-	L7	P	A	004	B	AA
Model Name		Communication	Input Power Supply	Capacity	Encoder Type	Option	
XDL Series		Stand I/O & Index Type	A:200VAC	001:100W 002:200W 004:400W 008:750W 010:1.0kW 020:2.0kW 035:3.5kW	U:Universal	Exclusive Option Code	

Indexer Function Type **XDL-L7P**

Providing Program Function built-in single axis position determination module

- Supporting position control mode by pulse input
- Position control mode
- Possible to use without upper controller
- Modbus RTU Protocol (RS-422)


Support various motor and Encoder drive

- Supporting Rotary, DD and Motor drive (supporting 3rd party motor)
- Quadrature, BiSS-C, Tamagawa serial abs, EnDat 2.2, Resolver

Improved Control Performance

- Improved Control bandwidth
- Providing 4-step Notch-Filter
- Vibration control by Real-time FET
- Real-time gain tuning function

- 1 Display
- 2 Status LED
- 3 Charge Lamp
- 4 Main Power Connector (L1, L2, L3)
- 5 DC Reactor Connector(P0, PI) Short-Circuit When Not used
- 6 Regenerative Resistor Connector (B+, B, BI)
 - Short-Circuit B, BI terminals when standard type
 - Use B+, B terminals when using external resistor
- 7 Control Power connector (C1, C2)
- 8 Motor power connector(U, V, W)
- 9 Connector for analogue monitor
- 10 Switch for nod address setting
- 11 USB connector (USB)
- 12 RS-422 communication connector (CN3, CN4)
- 13 Control signal connector (I/O)
- 14 Encoder Connector (ENCODER)
- 15 Ground

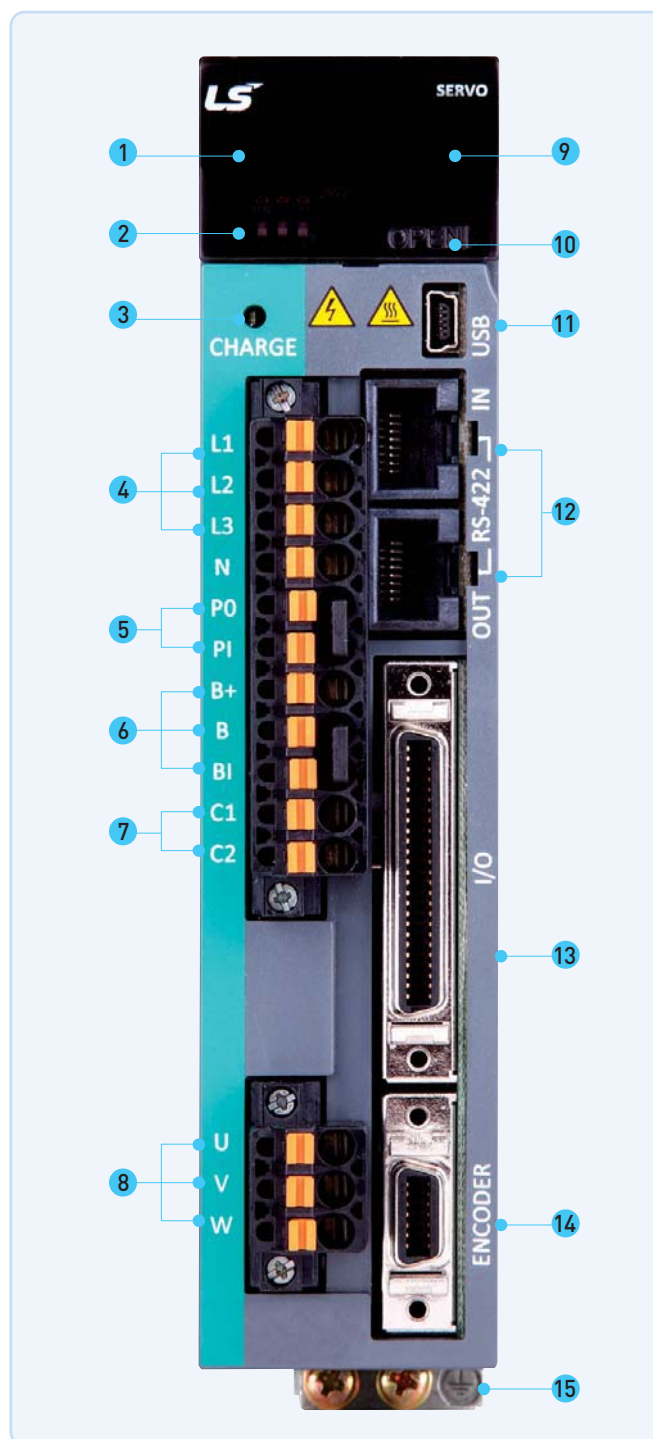

XDL-L7P Incremental Type

Rated Speed (rpm)	Maximum Speed (rpm)	Flange Size	Applicable Motor	Applicable Drive	Standard Encoder Type	Encoder Cable	Power Cable			
					Quadrature Type	INC	For power	Power + Brake	Brake	
3,000	5,000	□40	SAR3A	L7PA001U	* 2,048P/R	XLCS-E□□□AS	XLCS-P□□□GS		XLCS-P□□□KB	
		□40	SAR5A	L7PA001U						
		□40	SA01A	L7PA001U						
		□40	SA015A	L7PA002U						
		□60	SB01A	L7PA002U						
		□60	SB02A	L7PA002U						
		□60	SB04A	L7PA004U						
		□80	SC04A	L7PA004U						
		□80	SC06A	L7PA008U						
		□80	SC08A	L7PA008U						
		□80	SC10A	L7PA010U						
		□130	SE09A	L7PA008U		XLCS-E□□□BS	XLCS-P□□□HS	XLCS-P□□□NB		
		□130	SE15A	L7PA020U						
		□130	SE22A	L7PA020U			XLCS-P□□□IS	XLCS-P□□□PB		
		□180	SF30A	L7PA035U						
2,000	3,000	□80	SC03D	L7PA004U	* 3,000P/R	XLCS-E□□□AS	XLCS-P□□□GS		XLCS-P□□□KB	
		□80	SC05D	L7PA008U						
		□80	SC06D	L7PA008U						
		□80	SC07D	L7PA008U						
		□130	SE06D	L7PA008U		XLCS-E□□□BS	XLCS-P□□□HS	XLCS-P□□□NB		
		□130	SE11D	L7PA010U						
		□130	SE16D	L7PA020U			XLCS-P□□□IS	XLCS-P□□□PB		
		□130	SE22D	L7PA020U						
		□180	SF22D	L7PA020U			XLCS-P□□□IS		XLCS-P□□□SB	
		□180	LF35D	L7PA035U						
		□220	SG22D	L7PA020U			XLCS-P□□□HS	XLCS-P□□□NB		
		□220	LG35D	L7PA035U						
		□130	SE05G	L7PA008U			XLCS-P□□□IS	XLCS-P□□□PB		
		□130	SE09G	L7PA010						

XDL-L7P Serial Type

Rated Speed (rpm)	Maximum Speed (rpm)	Flange Size	Applicable Motor	Applicable Drive	Standard Encoder Type	Encoder Cable		Power Cable				
					Serial Type	Serial	Abs	For power	Power + Brake	Brake		
3,000	5,000	□40	FALR5A	L7PA001U	* 18Bit Serial / M-Turn Abs	XLCS- E□□□ES	XLCS- E□□□ES1	XLCS- P□□□LS		XLCS- P□□□QS		
		□40	FAL01A	L7PA001U								
		□40	FAL015A	L7PA002U								
		□60	FBL01A	L7PA001U								
		□60	FBL02A	L7PA002U								
		□60	FBL04A	L7PA004U								
		□80	FCL04A	L7PA004U								
		□80	FCL06A	L7PA008U								
		□80	FCL08A	L7PA008U								
		□80	FCL10A	L7PA010U								
		□60	FB01A	L7PA001U				XLCS- P□□□FS				
		□60	FB02A	L7PA002U								
		□60	FB04A	L7PA004U								
		□80	FC04A	L7PA004U								
		□80	FC06A	L7PA008U								
		□80	FC08A	L7PA008U								
		□80	FC10A	L7PA010U								
		□130	FE09A	L7PA010U								
		□130	FE15A	L7PA020U		XLCS- E□□□DS	XLCS- E□□□DS1	XLCS- P□□□HS	XLCS- P□□□NB			
		□130	FE22A	L7PA020U								
		□130	FE30A	L7PA035U								
		□180	FF30A	L7PA035U				XLCS-P□□□S	XLCS-P□□□PB			
		□80	FCL03D	L7PA004U				XLCS- P□□□LS		XLCS- P□□□QS		
2,000	3,000	□80	FCL05D	L7PA008U	* 19Bit Serial / M-Turn Abs	XLCS- E□□□ES	XLCS- E□□□ES1					
		□80	FCL06D	L7PA008U			XLCS- P□□□FS					
		□80	FCL07D	L7PA008U								
		□80	FC03D	L7PA004U								

XDL-L7PA Drive


Item		Type Name	XDL-L7PA001U	XDL-L7PA002U	XDL-L7PA004U	XDL-L7PA008U	XDL-L7PA010U	XDL-L7PA020U	XDL-L7PA035U
Input Power	Main Power Supply	3 Phase AC200 ~ 230[V](-15 ~ +10[%]), 50 ~ 60[Hz]							
	Control Power Supply	Single Phase AC200 ~ 230[V](-15 ~ +10[%]), 50 ~ 60[Hz]							
Rated Current[A]			1.4	1.7	3.0	5.2	6.75	13.5	16.7
Peak Current[A]			4.2	5.1	9.0	15.6	20.25	40.5	50.1
Encoder Type		Quadrature(Incremental) BiSS-B, BiSS-C(Absolute, Incremental) Tamagawa Serial(Absolute, Incremental) EnDat 2.2							
Control Performance	Speed Control Range	Maximum 1: 5000							
	Frequency Response	Maximum 1 [kHz] or above (When using 19bit Serial Encoder)							
	Speed Variation Ratio	± 0.01 [%] or lower [when load changes between 0 and 100%] ± 0.1 [%] or lower [temperature 25 $\pm 10^{\circ}\text{C}$]							
	Accel/Decel Time	Straight or S-curve acceleration/deceleration [0~10,000[ms], 0~1,000[ms] Unit configurable]							
	Input Frequency	1[Mpps], line drive / 200[kpps], Open Collector							
	Input Pulse Type	Symbol + Pulse Series, CW+CCW, A/B Phase							
RS422 Communication Specifications	Communication Specifications	ANSI/TIA/EIA-422 Standard Specifications							
	Communication Protocol	MODBUS-RTU							
	Connector	RJ45 x 2							
	Synchro Method	Asynchronous							
	Transmission Speed	9600 /19200/38400/57600 [bps] Can be configured at [0x3002]							
	Transmission Distance	Maximum 200 [m]							
	Power Consumption	100[mA]							
	Terminating Resistance	Dip S/W(On/Off), Built-In 120 Ω							
Input/Output Signal	Digital Input	Input voltage range: DC 12[V] ~ DC 24[V] Total 16 input channel (allocatable) 32 function inputs can be selectively allocated (*SV_ON, *POT, *NOT, *A-RST, *START, *STOP, *REGT, *EMG, *HOME, *HSTART, *ISEL0, *ISEL1, *ISEL2, *ISEL3, *ISEL4, *ISEL5, PCON, GAIN2, P_CL, N_CL, MODE, PAUSE, ABSRQ, JSTART, JDIR, PCLR, AOV, SPD1/LVSF1, SPD2/LVSF2, SPD3, PROBE1, PROBE2) * Basic allocation signal.							
	Digital Output	Use rating: DC 24[V] $\pm 10\%$, 120[βA] Total 8 input channel (allocatable) 19 function inputs can be selectively allocated (*ALARM $\pm$, *READY $\pm$, *BRAKE $\pm$, *INPOS1 $\pm$, *ORG $\pm$, *EOS $\pm$, *TGON $\pm$, *TLMT $\pm$, VLMT $\pm$, INSPD $\pm$, ZSPD $\pm$, WARN $\pm$, INPOS2 $\pm$, IOUT0 $\pm$, IOUT1 $\pm$, IOUT2 $\pm$, IOUT3 $\pm$, IOUT4 $\pm$, IOUT5 $\pm$) * Standard Allocation signal							
Analog Input/output	Analog input								

External Dimensions

XGT Servo System(XDL/XML) 50 / 51


*Unit [mm]

**XDL-L7PA001U ~
XDL-L7PA004U**
[Weight : 1.0kg
(Fan-Cooling included)]

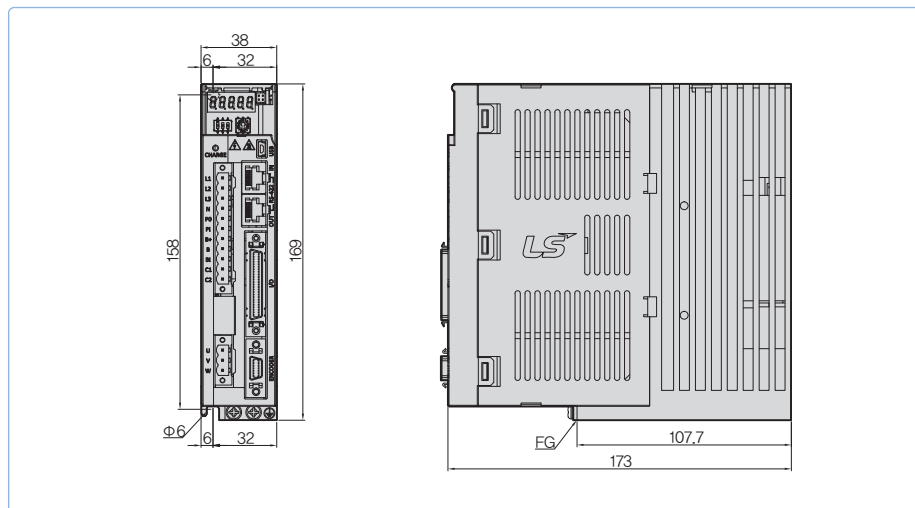


*Unit [mm]

**XDL-L7PA008U /
XDL-L7PA010U**
[Weight : 1.5kg
(Fan-Cooling included)]

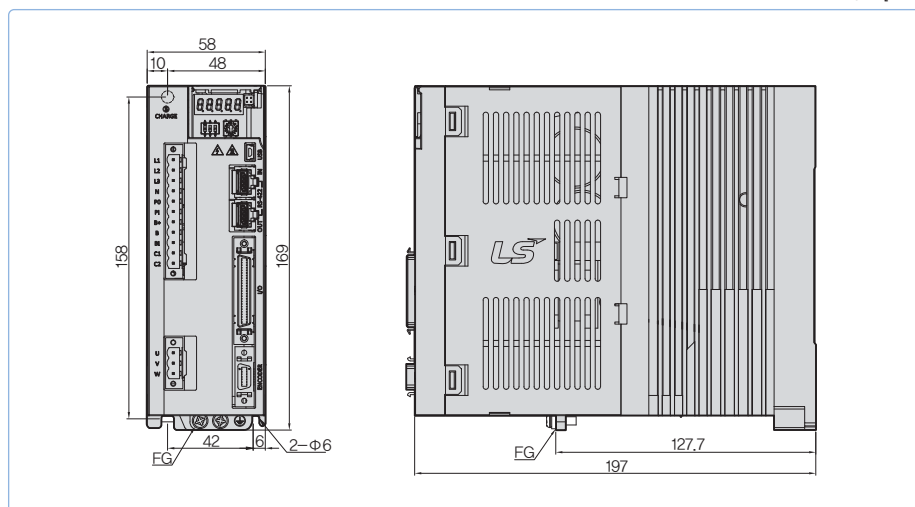

*Unit [mm]


**XDL-L7PA020U /
XDL-L7PA035U**
[Weight : 2.5kg
(Fan-Cooling included)]

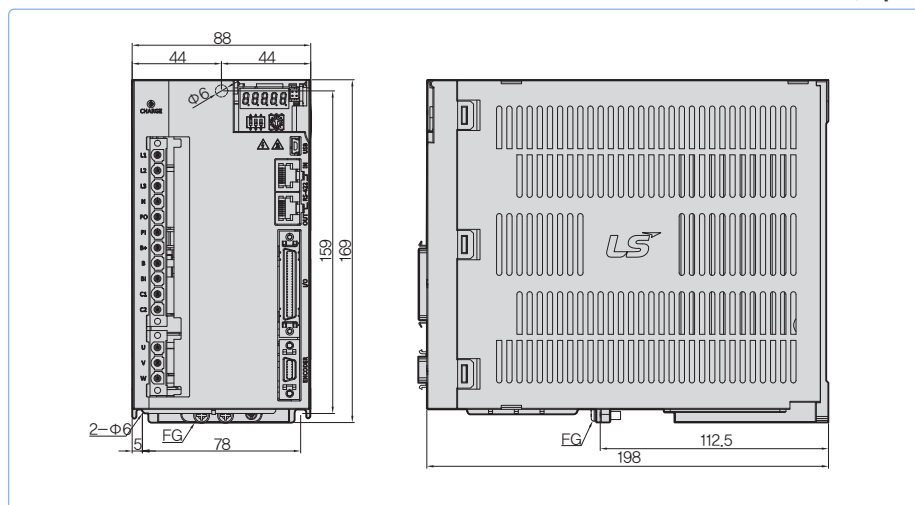

XIP(PEGASUS) Series



Servo Drive Designation

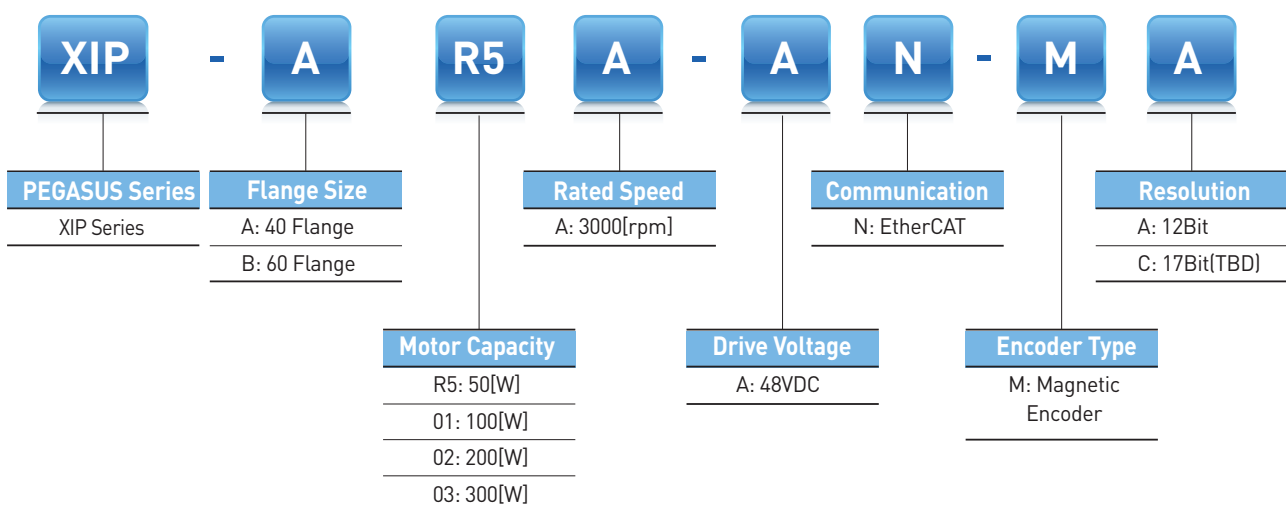

Integrated Servo System Type XIP(PEGASUS)

Enhanced efficiency integrated servo system

- Cost effective from installation by integrated system of motor, encoder cable and drive
- Maximization for useful space when installed at limited and small space
- High effectiveness for application of multi axis because there is no limitation for space of installation

Real-time control through EtherCAT

- High speed, Real-time capability and Synchronization mechanism
- Improved EtherCAT communication speed
- Supporting CoE, EoE and FoE

- ① Input / Output Signal Connector (CN1)
 - This Connector is for Sequence Input / Output Signals
- ② EtherCAT Communication Output Port (OUT)
- ③ Status LED
 - It Indicates the current state of EtherCAT Communication
- ④ Power Connector (CN3)
- ⑤ EtherCAT Communication Input Port (IN)
- ⑥ Safety Connector (CN2)
 - This Connector connects Safety Devices
- ⑦ USB Connector (CN5, Mini B type)
 - This Connector is to Communicate With a PC
- ⑧ Node Address Setting Switch
 - This Switch is to set the node address of the drive
 - You can set the node addresses from 0 to 15



Rated Values of
Servo Drive

Rated	□40 50W	□40 100W	□60 100W	□60 200W	□60 300W
Continuous output current [Arms]	1.77	2.38	3.62	5	6.8
Maximum output current [Arms]	3.54	3.75	7.24	10	13.6
Input voltage	DC 48V ~ DC 60V				

Basic
Specifications

Category		Details
Use conditions	Control method	PWM controlled sine wave current driving method
	Operating temperature /storage temperature	0~+40[°C] / -20~ +60[°C]
	Operating humidity /storage humidity	Below 80% RH / Below 90% RH (no freeze or condensation)
	Vibration-/impact-resistance	TBD
	Degree of protection /degree of pollution	TBD
	Altitude	1000m or lower
	Other	To be free from electrostatic noise, strong electrolysis, or radiation.
Performance	Speed variation	Load variation At 0 to 100% load: $\pm 3\%$ (at rated speed)
		Voltage variation Rated voltage $\pm 10\%$: 0% (at rated speed)
		Temperature variation 25°C: $\pm 0.1\%$ or less (at rated speed)
Input/ output signal	Input signal	Input voltage range: DC 12 V - DC 30 V The 4-channel input signal can be assigned to 12 functions: POT, NOT, HOME, STOP, PCON, GAIN2, PCL, NCL, PROBE1, PROB2, EMG, and ARST.
	Output signal	Rated voltage and current: DC 24 V $\pm 10\%$, 120 [mA] The 2-channel output signal can be assigned to 11 functions: BRAKE, ALARM, RDY, ZSPD, INPOS1, TLMT, VLMT, INSPD, WARN, TGON, and INPOS2.
Analog Monitor		Number of channels: 1, Output voltage range: $\pm 4V$, Angular resolution: 12 bits, Stabilization time: 15 us
USB communica- tion	Connecting device	PC or USB storage medium
	Communication standard	Conform to the USB 2.0 Full Speed Standard.
		Function Firmware download, parameter setting, adjustment, auxiliary functions, and parameter copy function.
Dynamic brake (three-phase short-circuit)		Activates when servo alarm, servo OFF, or Emergency stop (POT, NOT and EMG) is input.
Protection functions		Overcurrent, overload, current limit, overheat, overvoltage, undervoltage, overspeed, encoder error, position follow error, etc.
Auxiliary functions		Gain adjustment, alarm history, JOG drive, programmed JOG drive, etc.
Safety functions	Input	STO1 and STO2
	Compatible standard	TBD

EtherCAT
Communication
Specification

Category		Details
Communicati on standard	FoE	Firmware download
	EoE	Parameter setting, adjustment, auxiliary functions, and parameter copy through UDP.
	CoE	IEC 61158 Type12, IEC 61800-7 CiA 402 drive profile
Physical layer		100BASE-TX(IEEE802.3)
Connector		RJ45 x 2
Distance		Within 100 m between nodes
DC (Distributed Clock)		Sync by DC mode
LED Display		• L/A0(Link/Act IN) • L/A1(Link/Act OUT) • RUN • ERR
Cia402 drive Profile		Supports CSP, CSV, CST, PP, PV, PT, and HM Modes.

Encoder Specification




Category	Details
Encoder Type	Magnetic Encoder (12bit)

Motor Specification

Model	Unit	□40 50W	□40 100W	□60 100W	□60 200W	□60 300W
Rated Torque	[Kgf cm]	1.62	3.25	3.25	6.50	9.74
Max. Torque	[Kgf cm]	3.24	4.88	6.50	13.0	19.48
Rated Speed	[rpm]	3000	2400	3000	3000	3000
Max Speed	[rpm]	3000	3000	3000	3000	3000
Inertia	[Kg m ² x 10 ⁻⁴]	0.0240	0.0450	0.114	0.182	0.321




XIP-B01A

*Unit [mm]

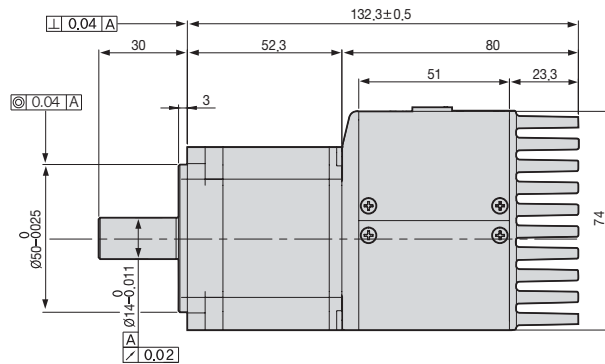





XIP-B02A

*Unit [mm]

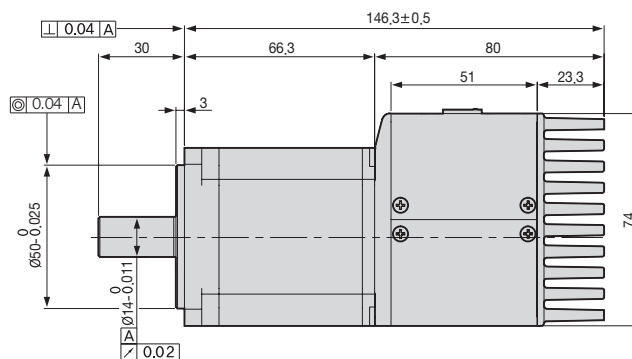

XIP-B03A

*Unit [mm]

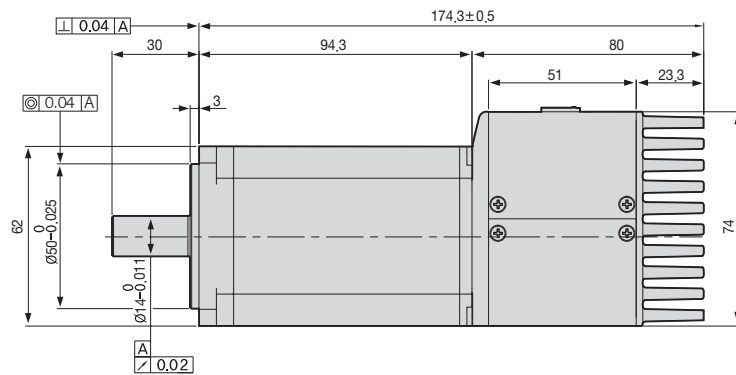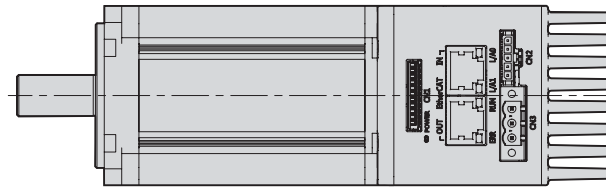



Servo Motor

Contents

S Series

Solid/Hollow Shaft Type Rotating Servo Motor ----- 60

F Series

Flat Type Rotating Servo Motor ----- 76

MDM Series

Direct-Drive Motor ----- 91

Servo Motor Designation



XML	S	E	P	04	A	E	K	1
Model Name XML Series	Motor Shaft S : Solid Shaft(Standard) L : Solid Shaft(Low Current) H : Hollow Shaft	Input Power Supply						

Motor Specifications [Rated 3000r/min]

Servo Motor (XML-□□□□)		SAR5A	SA01A	SA015A	SB01A	SB02A	SB04A	SC04A	SC06A	SC08A	SC10A				
Applicable Drive (L7□A□□)		L7□A001		L7□A002		L7□A004		L7□A008		L7□A010					
Flange Size(□)		□40			□60			□80							
Rated Output	[kW]	0.05	0.1	0.15	0.1	0.2	0.4	0.4	0.6	0.8	1				
Rated Torque	[N · m]	0.16	0.32	0.48	0.32	0.64	1.27	1.27	1.91	2.55	3.19				
	[kgf · cm]	1.62	3.25	4.87	3.25	6.49	12.99	12.99	19.49	25.98	32.48				
Max. Instantaneous	[N · m]	0.48	0.96	1.43	0.96	1.91	3.82	3.82	5.73	7.64	9.56				
	[kgf · cm]	4.87	9.74	14.62	9.74	19.48	38.96	38.96	58.47	77.95	97.43				
Rated Current	[A]	1.2	1.38	1.73	1.65	1.63	2.89	2.82	3.58	4.83	5.37				
Max. Current	[A]	3.6	4.14	5.19	4.95	4.89	8.67	8.46	10.74	14.49	16.11				
Rated Speed	[r/min]	3000													
Max. Speed	[r/min]	5000													
Inertia	[kg · m ² × 10 ⁻⁴]	0.02	0.05	0.06	0.11	0.18	0.32	0.67	1.09	1.51	1.93				
	[gf · cm · s ²]	0.02	0.05	0.07	0.12	0.19	0.33	0.69	1.11	1.54	1.97				
Allowable Load Inertia Ratio		30 times of motor inertia			20 times of motor inertia			15 times of motor inertia							
Rated Power Rate	[kW/s]	10.55	23.78	35.34	8.89	22.26	50.49	24.05	33.39	43.02	52.57				
Speed/Position Detector	Standard Note1	Quad.Type Incremental 2048[P/R]				Quad.Type Incremental 3000[P/R]									
	Option	Serial Type 18[Bit]				Serial Type 19[Bit]									
Specifications & Features	Structure	Fully closed · Self cooling IP55 Note1						Fully closed · Self cooling IP65 Note1							
	Rated Time	Continuous													
	Ambient Temp	Operating : 0 ~ 40[°C] Storage : -10 ~ 60[°C]													
	Ambient Humidity	20 ~ 80[%] (avoid dew-condensation)													
	Atmosphere	Avoid direct sunlight, no corrosive													

Motor Specifications [Rated 3000r/min]

Servo Motor (XML-□□□□)		SE09A	SE15A	SE22A	SE30A	SF30A	SF50A	HB01A	HB02A	HB04A	HE09A	HE15A	HE30A
Applicable Drive (L7□A□□)		L7□A008	L7□A020	L7□A050	L7□A035	L7□A050		L7□A002	L7□A004	L7□A008	L7□A020	L7□A050	
Flange Size(□)		□130				□180		□60			□130		
Rated Output	[kW]	0.9	1.5	2.2	3	3	5	0.1	0.2	0.4	0.9	1.5	3
	[N · m]	2.86	4.77	7	9.55	9.55	15.91	0.32	0.64	1.27	2.86	4.77	9.55
Rated Torque	[kgf · cm]	29.23	48.72	71.45	97.43	97.43	162.38	3.25	6.49	12.99	29.23	48.72	97.43
	[N · m]	8.59	14.32	21.01	28.64	28.64	47.74	0.96	1.91	3.82	8.59	14.32	28.64
Max. Instantaneous	[kgf · cm]	87.69	146.15	214.35	292.29	292.29	487.15	9.74	19.48	38.96	87.69	146.15	292.29
	[A]	4.95	8.23	11.98	17.16	16.7	27.4	1.65	1.63	2.89	4.95	8.23	17.16
Rated Current	[A]	14.85	24.69	35.94	51.48	50.1	82.2	4.95	4.89	8.67	14.85	24.69	51.48
Rated Speed	[r/min]	3000											
Max. Speed	[r/min]	5000						3500					
	[kg · m ² × 10 ⁻⁴]	6.66	12	17.34	22.68	30.74	52.13	0.27	0.33	0.46	19.56	22.27	31.81
Inertia	[gf · cm · s ²]	6.8	12.24	17.69	23.14	31.37	53.19	0.27	0.34	0.47	19.96	22.72	32.46
Allowable Load Inertia Ratio		10 times of motor inertia				5 times of motor inertia		20 times of motor inertia			10 times of motor inertia		
Rated Power Rate		12.32	18.99	28.28	40.20	29.66	48.58	3.34	11.98	34.47	4.10	10.01	22.03
Speed/Position Detector	Standard Note1	Quad. Type Incremental 3000[P/R]						Quad.Type Incremental 1024[P/R]			Quad.Type Incremental 2048[P/R]		
	Option	Serial Type 19[Bit]						X					
Specifications & Features	Structure	Fully closed · Self cooling IP65 Note1						Fully closed · Self cooling IP55 Note1					

Motor Specifications [Rated 2000r/min]

Servo Motor (XML-□□□□)		SC03D	SC05D	SC06D	SC07D	SE06D	SE11D	SE16D	SE22D
Applicable Drive (L7□A□□)		L7□A004	L7□A008			L7□A008	L7□A010	L7□A020	
Flange Size(□)		□80				□130			
Rated Output	[kW]	0.3	0.45	0.55	0.65	0.6	1.1	1.6	2.2
	[N · m]	1.43	2.15	2.63	3.1	2.86	5.25	7.64	10.5
Rated Torque	[kgf · cm]	14.61	21.92	26.79	31.66	29.23	53.59	77.94	107.17
	[N · m]	4.3	6.45	7.88	9.31	8.59	15.75	22.92	31.51
Max. Instantaneous	[kgf · cm]	43.84	65.77	80.38	94.99	87.69	160.76	233.83	321.52
	[A]	2.59	3.23	3.82	4.42	3.97	6.28	9.23	12.37
Rated Current	[A]	2.59	3.23	3.82	4.42	3.97	6.28	9.23	12.37
Max. Current	[A]	7.77	9.69	11.46	13.26	11.91	18.84	27.69	37.11
Rated Speed	[r/min]	2000							
Max. Speed	[r/min]	3000							
Inertia	[kg · m ² × 10 ⁻⁴]	0.67	1.09	1.51	1.93	6.66	12	17.34	22.68
	[gf · cm · s ²]	0.69	1.11	1.54	1.97	6.8	12.24	17.69	23.14
Allowable Load Inertia Ratio		15 times of motor inertia				10 times of motor inertia			
Rated Power Rate	[kW/s]	30.43	42.27	45.69	49.97	12.32	22.98	33.65	48.64
Speed/Position Detector	Standard Note1)	Quad. Type Incremental 3000[P/R]							
	Option	Serial Type 19[Bit]							
Specifications & Features	Structure	Fully closed · Self cooling IP65 Note1)							
	Rated Time	Continuous							
	Ambient Temp	Operating : 0 ~ 40[°C] Storage : -10 ~ 60[°C]							
	Ambient Humidity	90[%]RH Below [avoid dew-condensation]							
	Atmosphere	Avoid direct sunlight, no corrosive gas, inflammable gas, oil mist, or dust.							
	E/V	Elevation/vibration 49[m/s ²][5G]							
Weight	[kg]	1.9	2.5	3.2	3.9	5.5	7.5	9.7	11.8

Note1) Except for axis penetration, when you attach reducer to the motor, we don't guarantee IP for reducer. If you

Motor Specifications [Rated 2000r/min]

Servo Motor (XML-□□□□)		SF22D	LF35D	SF55D	SF75D	SG22D	LG35D	SG55D	SG75D
Applicable Drive (L7□A□□)		L7□A020	L7□A035	L7□A050	L7□A075	L7□A020	L7□A035	L7□A050	L7□A075
Flange Size(□)		□ 180				□ 220			
Rated Output	[kW]	2.2	3.5	5.5	7.5	2.2	3.5	5.5	7.5
	[N · m]	10.5	16.71	26.26	35.81	10.5	16.71	26.26	35.81
Rated Torque	[kgf · cm]	107.17	170.5	267.93	365.36	107.2	170.52	267.9	365.4
	[N · m]	31.51	50.13	78.77	89.51	31.51	50.13	78.77	89.51
Max. Instantaneous	[kgf · cm]	321.52	511.51	803.8	913.41	321.52	511.51	803.8	913.4
	[A]	13.5	15.85	30.25	34.6	12.3	16.05	30.25	38
Rated Current	[A]	40.5	47.55	90.75	86.5	36.9	48.15	90.75	102
Rated Speed	[r/min]	2000							
Max. Speed	[r/min]	3000				2500			
Inertia	[kg · m ² × 10 ⁻⁴]	30.74	52.13	83.6	121.35	51.42	80.35	132.41	172.91
	[gf · cm · s ²]	31.35	53.16	85.31	123.74	52.47	81.99	135.11	176.44
Allowable Load Inertia Ratio		5 times of motor inertia							
Rated Power Rate	[kW/s]	35.88	53.56	82.56	105.75	21.45	34.75	52.07	74.15
Speed/Position Detector	Standard Note1	Quad. Type Incremental 3000[P/R]							
	Option	Serial Type 19[Bit]							
Specifications & Features	Structure	Fully closed · Self cooling IP65 Note1							
	Rated Time	Continuous							
	Ambient Temp	Operating : 0 ~ 40[°C] Storage : -10 ~ 60[°C]							
	Ambient Humidity	90[%]RH Below (avoid dew-condensation)							
	Atmosphere	Avoid direct sunlight, no corrosive gas, inflammable gas, oil mist, or dust.							
	E/V	Elevation/vibration 49[m/s ²][5G]							
Weight	[kg]	12.4	17.7	26.3	35.6	17	22	30.8	37.5

Motor Specifications [Rated 1500r/min]

Servo Motor (XML-□□□□)		SE05G	SE09G	SE13G	SE17G	SF20G	LF30G	SF44G	SF60G	SG20G	LG30G	SG44G	SG60G
Applicable Drive (L7□A□□)		L7□A008	L7□A010	L7□A020		L7□A035		L7□A050	L7□A075	L7□A020	L7□A035	L7□A050	L7□A075
Flange Size(□)		□130				□180				□220			
Rated Output	[kW]	0.45	0.85	1.3	1.7	1.8	2.9	4.4	6	1.8	2.9	4.4	6
	[N · m]	2.86	5.41	8.28	10.82	11.46	18.46	28.01	38.19	11.46	18.46	28.01	38.19
Rated Torque	[kgf · cm]	29.23	55.21	84.44	110.42	116.92	188.37	285.8	389.7	116.92	188.37	285.8	389.7
	[N · m]	8.59	16.23	24.83	32.46	34.37	55.38	84.02	95.48	34.47	55.38	84.02	95.48
Max. Instantaneous	[kgf · cm]	87.69	165.63	253.32	331.26	350.75	565.1	857.39	974.3	350.8	565.1	857.39	974.3
	[A]	3.97	6.47	10	12.75	14.7	15.92	31.75	38	13.1	16.19	31.5	38
Rated Current	[A]	3.97	6.47	10	12.75	14.7	15.92	31.75	38	13.1	16.19	31.5	38
Max. Current	[A]	11.91	19.41	30	38.25	44.1	47.64	95.25	102	39.3	48.57	94.5	102
Rated Speed	[r/min]	1500											
Max. Speed	[r/min]	3000				3000	2700	3000	2500	3000	2700	3000	2500
Inertia	[kg · m ² × 10 ⁻⁴]	6.66	12	17.34	22.68	30.74	52.13	83.6	121.35	51.42	80.35	132.41	172.91
	[gf · cm · s ²]	6.8	12.24	17.69	23.14	31.37	53.19	85.31	123.83	52.47	81.99	135.11	176.44
Allowable Load Inertia Ratio		10 times of motor inertia					5 times of motor inertia						
Rated Power Rate	[kW/s]	12.32											

Motor Specifications [Rated 3000r/min]

Servo Motor (XML-□□□□)		SEP09A	SEP15A	SEP22A	SEP30A	SFP30A	SFP50A
Applicable Drive (L7□A□□)		L7□B010	L7□B020		L7□B035		L7□B050
Flange Size(□)		□130				□180	
Rated Output	[kW]	0.9	1.5	2.2	3	3	5
Rated Torque	[N · m]	2.86	4.77	7	9.55	9.55	15.92
	[kgf · cm]	29.23	48.72	71.46	97.44	97.44	162.4
Max. Instantaneous	[N · m]	8.59	14.32	21.01	28.65	28.65	39.79
	[kgf · cm]	87.7	146.16	214.37	292.33	292.33	406.01
Rated Current	[A]	2.97	4.89	7.17	9.78	9.37	15.49
Max. Current	[A]	8.62	14.2	20.84	28.41	27.38	45.27
Rated Speed	[r/min]	3000					
Max. Speed	[r/min]	5000					
Inertia	[kg · m ² × 10 ⁻⁴]	6.659	11.999	17.339	22.679	30.74	52.13
	[gf · cm · s ²]	6.795	12.244	17.693	23.142	31.367	53.194
Allowable Load Inertia Ratio		10 times of motor inertia				5 times of motor inertia	
Rated Power Rate		[kW/s]	12.32	19.00	28.28	40.21	42.71
Speed/Position Detector	Standard Note1	Quad. Type Incremental 3000[P/R]					
	Option	Serial Type 19[Bit]					
Specifications & Features	Structure	Fully closed · Self cooling IP65 Note1					
	Rated Time	Continuous					
	Ambient Temp	Operating : 0 ~ 40[°C] Storage : -10 ~ 60[°C]					
	Ambient Humidity	90[%]RH Below (avoid dew-condensation)					
	Atmosphere	Avoid direct sunlight, no corrosive gas, inflammable gas, oil mist, or dust.					
	E/V	Elevation/vibration 49[m/s ²][5G]					

Motor Specifications [Rated 2000r/min]

Servo Motor [XML-□□□□]	SEP06D	SEP11D	SEP16D	SEP22D	SFP22D	SFP35D	SFP55D	SFP75D	SGP22D	SGP35D	SGP55D	SGP75D	SGP110D	
Applicable Drive [L7□A□□□]	L7□B010		L7□B020		L7□B035		L7□B050	L7□B075	L7□B020	L7□B035	L7□B050	L7□B075	L7□B150	
Flange Size[□]	□ 130				□ 180				□ 220					
Rated Output [kW]	0.6	1.1	1.6	2.2	2.2	3.5	5.5	7.5	2.2	3.5	5.5	7.5	11	
Rated Torque	[N · m]	2.86	5.25	7.64	10.5	10.5	16.71	26.26	35.81	10.50	16.71	26.26	35.81	52.52
	[kgf · cm]	29.23	53.59	77.95	107.19	107.19	170.52	267.96	365.41	107.19	170.52	267.96	365.41	535.93
Max. Instantaneous	[N · m]	8.59	15.76	22.92	31.51	31.51	50.13	65.65	89.52	31.51	50.13	78.78	89.52	131.30
	[kgf · cm]	87.7	160.78	233.86	321.56	321.56	511.57	669.91	913.52	321.56	511.57	803.89	913.52	1339.82
Rated Current [A]	1.78	3.27	4.79	6.54	6.56	10.07	15.82	21.36	6.27	10.03	15.66	18.42	27.41	
Max. Current [A]	5.18	9.5	13.92	19	19.17	29.43	38.64	52.16	18.43	29.51	46.08	45.25	67.33	
Rated Speed [r/min]	2000													
Max. Speed [r/min]	3000											2500		
Inertia	[kg · m ² × 10 ⁻⁴]	6.659	11.999	17.339	22.679	30.74	52.13	83.6	121.35	51.42	80.35	132.41	172.91	291.36
	[gf · cm · s ²]	6.795	12.244	17.693	23.									

Motor Specifications [Rated 1500r/min]

Servo Motor (XML-□□□□)		SEP05G	SEP09G	SEP13G	SEP17G	SEP20G	SFP30G	SFP44G	SFP60G	SFP75G	SGP20G	SGP30G	SGP44G	SGP60G	SGP85G	SGP110G	SGP150G
Applicable Drive (L7□A□□□)		L7□B010		L7□B020		L7□B020	L7□B050		L7□B075	L7□B150	L7□B020		L7□B050	L7□B075	L7□B150		
Flange Size(□)		□130				□180				□220							
Rated Output	[kW]	0.45	0.85	1.3	1.7	1.8	2.9	4.4	6	7.5	1.8	2.9	4.4	6	8.5	11	15
	[N · m]	2.86	5.41	8.28	10.82	11.46	18.46	28.01	38.2	47.75	11.46	18.46	28.01	38.2	54.11	70.03	95.49
Rated Torque	[kgf · cm]	29.23	55.22	84.45	110.43	116.43	188.39	285.83	389.77	487.21	116.93	188.39	285.83	389.77	552.17	714.57	974.42
	[N · m]	8.59	16.23	24.83	32.47	34.38	55.39	70.03	95.49	119.37	34.38	55.39	70.03	95.49	135.28	175.07	219.6
Max. Instantaneous	[kgf · cm]	87.7	165.65	253.35	331.3	350.79	565.16	714.57	974.42	1218.02	350.79	565.16	714.57	974.42	1380.43	1786.43	2240
	[N · m]	8.59	16.23	24.83	32.47	34.38	55.39	70.03	95.49	119.37	34.38	55.39	70.03	95.49	135.28	175.07	219.6
Rated Current	[A]	1.78	3.37	5.19	6.74	7.15	11.12	16.87	22.78	28.13	6.84	11.08	16.71	19.65	28.24	35.71	45.71
Max. Current	[A]	5.18	9.79	15.07	19.58	20.91	32.59	49.21	65.64	81.57	20.11	33					

Motor Specifications [Rated 1000r/min]

Servo Motor [XML-□□□□]	SEP03M	SEP06M	SEP09M	SEP12M	SFP12M	SFP20M	SFP30M	SFP44M	SGP12M	SGP20M	SGP30M	SGP44M	SGP60M
Applicable Drive [L7□A□□]	L7□B010			L7□B035	L7□B020		L7□B050		L7□B020		L7□B050		L7□B150
Flange Size[□]	□ 130				□ 180				□ 220				
Rated Output [kW]	0.3	0.6	0.9	1.2	1.2	2	3	4.4	1.2	2	3	4.4	6
Rated Torque	[N · m]												
	[kgf · cm]												
Max. Instantaneous	[N · m]												
	[kgf · cm]												
Rated Current [A]	1.26	2.42	3.62	4.8	4.77	7.88	11.92	17.15	4.72	7.84	11.73	17.29	23.58
Max. Current [A]	3.65	7.04	10.51	13.95	13.94	23.03	29.12	41.88	13.87	23.06	34.51	50.87	57.92
Rated Speed [r/min]	1000												
Max. Speed [r/min]	2000												
Inertia	[kg · m ² × 10 ⁻⁴]												
	[gf · cm · s ²]												
Allowable Load Inertia Ratio	10 times of motor inertia												

SA Series

Plug Specifications



Spec.: 172167-1
(Made by AMP)

Power

Pin No.	Color	Signal
1	Red	U
2	White	V
3	Black	W
4	Green	Ground

(Power Connector Pin Table)




Spec.: 172165-1
(Made by AMP)

Brake

Pin No.	Signal
1	BK+
2	BK-

(Brake Connector Pin Table)




Spec.: 172165-1
(Made by AMP)

Encoder

Pin No.	Signal	Pin No.	Signal
1	A	9	V
2	A	10	V
3	B	11	W
4	B	12	W
5	Z	13	+5V
6	Z	14	0V
7	U	15	SHIELD
8	U		

(Parallel Encoder Connector Pin Table)

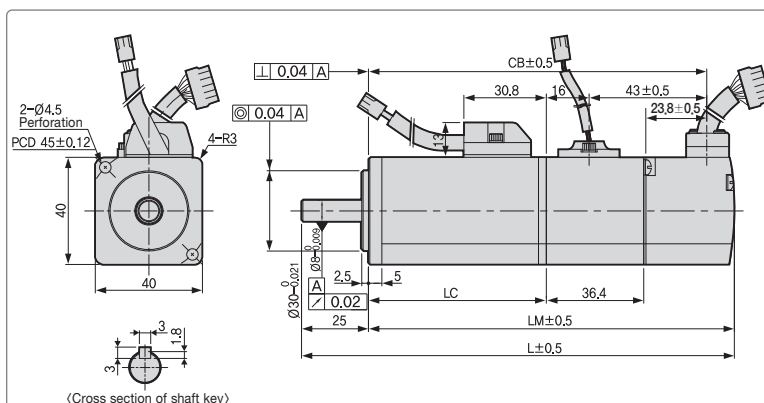


Model	External Dimensions(mm)				Weight(kg)
	L	LM	LC	CB	
SAR3A	101.3(137.6)	76.3(112.6)	42.5(42.4)	66.3(102.3)	0.32(0.67)
SAR5A	108.3(144.6)	83.3(119.6)	49.5(49.4)	73.3(109.3)	0.38(0.73)
SA01A	125.3(161.6)	100.3(136.6)	66.5(66.4)	90.3(126.6)	0.5(0.85)
SA015A	145.3	120.3	86.5	110.3	0.7

Note1) Use DC[24V] for brake input power supply. Note2) The () is for brake-attached type. Note3) For external dimensions for oil-sealed type. Please kindly contact us separately.

Note4)


SF, LF, SFP Series

Plug Specifications

Spec.: MS3102A22-22P
(Standard)

Power

Pin No.	Signal
A	U
B	V
C	W
D	Ground

Spec.: MS3102A24-10P
(Brake-attached type)

Pin No.	Signal	Pin No.	Signal
A	U	D	Ground
B	V	E	BK+
C	W	F	BK-

Encoder


1. Incremental type



Spec.: MS3102A20-29P

Pin No.	Signal	Pin No.	Signal
A	A	M	V
B	A	N	V
C	B	P	W
D	B	R	W
E	Z	H	+5V
F	Z	G	0V
K	U	J	SHIELD
L	U		

(Parallel Encoder Connector Pin Table)

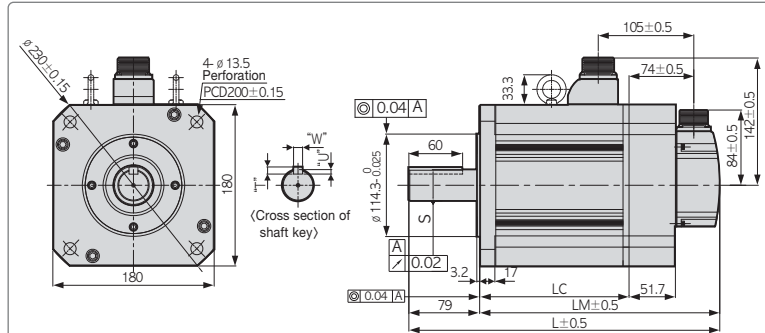Note1 Use DC[24V] for brake input power supply.**Note2** The () is for brake-attached type.**Note3** For external dimensions for oil-sealed type. Please kindly contact us separately.**Note4** Refer to page 74 for serial encoder pin table.**Note5** Use MS3102A32-17 for SF75G Power connector

Model	External Dimensions(mm)				Key					Weight(kg)
	L	LM	LC	LR	S	QW	T	W	U	

HB Series [Hollow Shaft type]

Plug Specifications




Spec.: 172167-1
(Made by AMP)

Power

Pin No.	Color	Signal
1	Red	U
2	White	V
3	Black	W
4	Green	Ground

(Power Connector Pin Table)

1. Incremental type




Spec.: 172171-1
(Made by AMP)

Encoder

Pin No.	Signal	Pin No.	Signal
1	A	9	V
2	A	10	V
3	B	11	W
4	B	12	W
5	Z	13	+5V
6	Z	14	0V
7	U	15	SHIELD
8	U		

(Parallel Encoder Connector Pin Table)

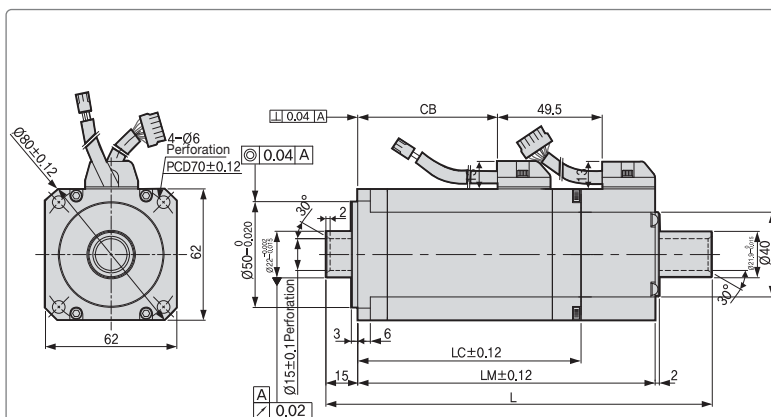

Model	External Dimensions(mm)					Weight(kg)
	L	LM	LC	CB	Hollow Shaft	
HB01A	140.5	103.5	68.5	24	15	0.89
HB02A	154.5	117.5	82.5	38	15	1.16
HB04A	182.5	140.5	105.5	66	15	1.69

HE Series [Hollow Shaft type]

Plug Specifications



Spec.: MS3102A20-4P
(Standard)

Power

Pin No.	Signal
---------	--------

Electric Brake Specifications

Applicable Motor Series	XML-SA,FAL	XML-SB,FB,FBL	XML-SC,FC,FCL	XML-SE,SEP,FE,FEP	XML-SF,SEP,FF,FFP	XML-SG,SGP,FG,FGP
Purpose	Maintenance					
Input voltage [V]	DC 24V	DC 24V	DC 24V	DC 24V	DC 24V	DC 90V
Static friction torque [N • m]	0.32	1.47	3.23	10.4	40	74
Capacity [W]	6	6.5	9	19.4	25	32
Coil resistance [Ω]	96	89	64	29.6	23	327
Rated current [A]	0.25	0.27	0.38	0.81	1.04	0.28
Braking mechanism	Spring brake					
Insulation grade	GraDde F					

Note1) For the Electronic Brake that is attached to our Servo Motor, the same specifications are to be applied as per the series.


Note2) Do not use it for braking purpose because the electronic brake is only for maintaining the stopped condition.

Note3) The characteristics of electronic brake is measured at 20°C.

Note4) Please make sure to always check the voltage specification on the motor because indicated brake specifications are subject to change.

S Series Encoder Pin Map

SA, SB, SC Series




Plug Specification:
172169-1(AMP)

Single Turn (N)		Multi Turn (M)	
핀번호	신호명	핀번호	신호명
1	MA	1	MA
2	MA	2	MA
3	SLO	3	SLO
4	SLO	4	SLO
5	-	5	VDD_B
6	-	6	GND_B
7	+5V	7	+5V
8	0V	8	0V
9	SHIELD	9	SHIELD

(Serial Encoder Connector Pin Table)

SE, SF, SG Series



17 Pole Plug
(MS3102A20-29P)

Single Turn (N)				Multi Turn (M)			
-----------------	--	--	--	----------------	--	--	--

Servo Motor Designation



XML	F	B	L	P	04	A	E	K	1
Model Name XML Series	Motor Shaft F : Flat Type				Motor Capacity R5 : 50[W] 01 : 100[W] 015 : 150[W] 02 : 200[W] 03 : 300[W] 04 : 400[W] 07 : 650[W] 08 : 800[W] 10 : 1.0[kW] 20 : 2.0[kW] 35 : 3.5[kW] 50 : 5.0[kW] 75 : 7.5[kW] 110 : 11[kW] 150 : 15[kW]		Encoders Type M : 19bit M-Turn Abs M8 : 18bit M-Turn Abs [SA Type]		Oil Seal, Brake Type None : None 1 : Oil Seal Attached 2 : Brake Attached 3 : Oil Seal, Brake Attached Note 1) In case of 40, 60, 80 Flange product, you can apply 200V drive only. Note2) If you apply nonstandard Encoder, Please contact our office. Note3) Refer to brake operating voltage
Flange Size A : 40 Flange B : 60 Flange C : 80 Flange E : 130 Flange F : 180 Flange G : 220 Flange H : 250 Flange J : 280 Flange	Series Classification None : General Flat Series (200VAC) L : L Series(200VAC)				Rated Speed A : 3000[rpm] D : 2000[rpm] G : 1500[rpm] M : 1000[rpm]		Shape of Shaft End N : Straight K : One side Round key [Standard]		
	Input Voltage None : 200VAC P : 400VAC								

Motor Specifications [Rated 3000r/min, 2000r/min]

Servo Motor (XML-□□□□)		FALR5A	FAL01A	FAL015A	FBL01A	FBL02A	FBL04A	FCL04A	FCL06A	FCL08A	FCL10A	FCL03D	FCL05D	FCL06D	FCL07D
Applicable Drive		L7□A001	L7□A002	L7□A001	L7□A002	L7□A004	L7□A004	L7□A008	L7□A010	L7□A004	L7□A008	L7□A004	L7□A008	L7□A008	L7□A008
Flange Size(□)		□40				□60				□80					
Rated Output	[kW]	0.05	0.1	0.15	0.1	0.2	0.4	0.4	0.6	0.75	1	0.3	0.45	0.55	0.65
	[N · m]	0.16	0.32	0.48	0.32	0.64	1.27	1.27	1.91	2.39	3.18	1.43	2.15	2.63	3.1
Rated Torque	[kgf · cm]	1.62	3.25	4.87	3.25	6.49	12.99	12.99	19.49	24.36	32.48	14.62	21.92	26.8	31.67
	[N · m]	0.48	0.96	1.43	0.96	1.91	3.82	3.82	5.73	7.16	9.55	4.3	6.45	7.88	9.31
Max. Instantaneous	[kgf · cm]	4.87	9.74	14.62	9.74	19.48	38.96	38.98	58.47	73.08	97.44	43.85	65.77	80.39	95.01
	[A]	0.95	1.25	1.76	0.95	1.45	2.6	2.58	3.81	5.02	5.83	2.5	3.05	3.06	3.83
Rated Current		0.95	1.25	1.76	0.95	1.45	2.6	2.58	3.81	5.02	5.83	2.5	3.05	3.06	3.83
Max. Current		2.85	3.75	5.28	2.85	4.35	7.8	7.75	11.42	15.07	17.5	7.51	9.16	9.18	11.5
Rated Speed		3000													

Motor Specifications [Rated 3000r/min]

Servo Motor [XML-□□□□]	FB01A	FB02A	FB04A	FC04A	FC06A	FC08A	FC10A	FE09A	FE15A	FE22A	FE30A	FF30A	FF50A
Applicable Drive	L7□A001	L7□A002	L7□A004	L7□A004		L7□A008		L7□A010		L7□A020	L7□A035	L7□A035	L7□A050
Flange Size(□)	□60				□80				□130				□180
Rated Output [kW]	0.1	0.2	0.4	0.4	0.6	0.75	1	0.9	1.5	2.2	3	3	5
Rated Torque [N · m]	0.32	0.64	1.27	1.27	1.91	2.39	3.18	2.86	4.77	7	9.55	9.55	15.91
[kgf · cm]	3.25	6.5	12.99	13	19.5	24.36	32.5	29.2	48.7	71.4	97.4	97.4	162.3
Max. Instantaneous [N · m]	0.96	1.91	3.82	3.82	5.73	7.16	9.55	8.59	14.32	21.01	28.65	28.65	47.74
[kgf · cm]	9.74	19.49	38.98	38.98	58.47	73.08	97.44	87.7	146.1	214.3	292.2	292.3	487
Rated Current [A]	0.95	1.45	2.6	2.58	3.81	5.02	6.7	6.45	9.15	13.24	16.09	15.26	26.47
Max. Current [A]	2.86	4.35	7.79	7.75	11.42	15.07	20.09	19.35	27.45	39.72	48.27	45.78	79.41
Rated Speed [r/min]	3000												
Max. Speed [r/min]	5000												
Inertia [kg · m ² × 10 ⁻⁴]	0.09	0.15	0.25	0.5	0.88	1.25	1.62	5.66	10.18	14.62	19.04	27.96	46.56
[gf · cm · s ²]	0.09	0.15	0.25	0.51	0.89	1.27							

Motor Specifications [Rated 2000r/min]

Servo Motor (XML-□□□□)		FF22D	FF35D	FF55D	FF75D	FG22D	FG35D	FG55D	FG75D
Applicable Drive		L7□A020	L7□A035	L7□A050	L7□A075	L7□A020	L7□A035	L7□A050	L7□A075
Flange Size(□)		□ 180				□ 220			
Rated Output	[kW]	2.2	3.5	5.5	7.5	2.2	3.5	5.5	7.5
	[N · m]	10.5	16.7	26.25	35.81	10.5	16.71	26.25	35.81
Rated Torque	[kgf · cm]	107.1	170.4	267.8	365.4	107.1	170.4	267.8	365.4
	[N · m]	31.5	50.1	78.76	89.53	31.51	50.12	78.76	89.53
Max. Instantaneous	[kgf · cm]	321.3	511.4	803.4	931.5	321.3	511.3	803.4	913.5
	[A]	13.07	16.48	28.78	32.95	10.25	14.67	29.74	30.17
Rated Current	[A]	39.21	49.44	86.34	98.85	30.75	44.01	89.22	90.51
Max. Current	[A]	39.21	49.44	86.34	98.85	30.75	44.01	89.22	90.51
Rated Speed	[r/min]	2000							
Max. Speed	[r/min]	3000				2500	3000	2700	3000
Inertia	[kg · m ² × 10 ⁻⁴]	27.96	45.56	73.85	106.7	41.13	71.53	117.52	149.4
	[gf · cm · s ²]	28.53	47.51	75.36	108.9	41.97	72.99	120.12	152.45
Allowable Load Inertia Ratio		5 times of motor inertia							
Rated Power Rate	[kW/s]	39.43	59.89	93.27	120.15	26.			

Motor Specifications [Rated1500r/min]

Servo Motor (XML-□□□□)		FE05G	FE09G	FE13G	FE17G	FF20G	FF30G	FF44G	FF60G	FF75G	FG20G	FG30G	FG44G	FG60G
Applicable Drive		L7□A008	L7□A010	L7□A020		L7□A020	L7□A035	L7□A050	L7□A075	L7□A075	L7□A020	L7□A035	L7□A050	L7□A075
Flange Size (□)		□ 130					□ 180					□ 220		
Rated Output	[kW]	0.45	0.85	1.3	1.7	1.8	2.9	4.4	6	7.5	1.8	2.9	4.4	6
	[N · m]	2.86	5.41	8.27	10.82	11.45	18.46	28	38.2	47.7	11.5	18.5	28	38.2
Rated Torque	[kgf · cm]	29.22	55.19	84.41	110.38	116.9	188.3	285.7	389.8	487.2	116.9	188.4	285.8	389.7
	[N · m]	8.59	16.23	24.82	32.46	34.35	55.38	84.03	95.5	143.2	34.4	55.4	84	95.5
Max. Instantaneous	[kgf · cm]	87.66	165.57	253.23	331.14	350.6	564.9	851.1	974.9	1462	350.8	565.1	857.4	974.3
	[A]	4.56	6.67	11.9	13.36	12.16	15.98	30.7	35.14	35.26	11.18	16.21	31.72	32.18
Rated Current	[A]	13.68	20.01	35.7	40.08	36.48	47.94	92.1	105.42	105.78	33.54	48.63	95.16	96.54
Rated Speed	[r/min]	1500												
Max. Speed	[r/min]	3000					3000	2700	3000	2500	2200	3		

Motor Specifications [Rated 1000r/min]

Servo Motor (XML-□□□□)		FE03M	FE06M	FE09M	FE12M	FF12M	FF20M	FF30M	FF44M	FG12M	FG20M	FG30M	FG44M
Applicable Drive		L7□A004	L7□A008	L7□A010	L7□A020	L7□A020	L7□A035	L7□A050	L7□A020	L7□A035	L7□A050		
Flange Size(□)		□ 130				□ 180				□ 220			
Rated Output	[kW]	0.3	0.6	0.9	1.2	1.2	2	3	4.4	1.2	2	3	4.4
	[N · m]	2.86	5.72	8.59	11.46	11.46	19.09	28.64	42.02	11.5	19.1	28.6	42
Rated Torque	[kgf · cm]	29.22	58.4	87.7	116.9	116.9	194.8	292.2	428.7	116.9	194.9	292.3	428.7
	[N · m]	8.59	17.18	25.77	34.22	34.38	57.29	85.94	126.1	34.4	57.3	85.9	126
Max. Instantaneous	[kgf · cm]	87.66	175.3	262.9	349.1	350.7	584.4	876.6	128.6	350.8	584.6	876.9	128.61
	[A]	2.73	4.56	6.18	10.67	11.1	12.96	16.58	30.6	11.28	13.1	15.52	27.26
Max. Current		8.19	13.68	18.54	32.01	33.03	38.88	49.74	91.8	33.84	39.3	46.56	81.78
Rated Speed		1000											
Max. Speed	[r/min]	2000				1700				2000			
	[												

Motor Specifications [Rated 3000r/min]

Servo Motor (XML-□□□□)		FEP09A	FEP15A	FEP22A	FEP30A	FFP30A	FFP50A
Applicable Drive		L7□B010□	L7□B020□	L7□B035□			L7□B050□
Flange Size(□)		□130				□180	
Rated Output	[kW]	0.9	1.5	2.2	3	3	5
	[N · m]	2.86	4.77	7	9.55	9.55	15.92
Rated Torque	[kgf · cm]	29.33	48.72	71.46	97.44	97.44	162.4
	[N · m]	8.59	14.32	20.01	28.65	28.65	38.79
Max. Instantaneous	[kgf · cm]	87.7	146.16	214.37	292.33	292.33	406.01
	[A]	3.47	6.68	9.12	9.94	9.79	16.07
Rated Current	[A]	10.4	20.03	27.35	29.81	29.38	48.22
Max. Current	[A]						
Rated Speed	[r/min]	3000					
Max. Speed	[r/min]	5000					
Inertia	[kg · m ² × 10 ⁻⁴]	5.659	10.179	14.619	19.04	27.96	46.56
	[gf · cm · s ²]	5.774	10.387	14.917	19.429	28.531	47.51
Allowable Load Inertia Ratio		10 times of motor inertia				5 times of motor inertia	
Rated Power Rate	[kW/s]	14.5	22.4	33.55	47.89	32.61	54.4
Speed/Position Detector	Standard Note1	Serial Type 19[Bit]					
	Option	×					
Specifications & Features	Structure						

Motor Specifications [Rated 1500r/min]


Servo Motor (XML-□□□□)		FEP05G	FEP09G	FEP13G	FEP17G	FFP20G	FFP30G	FFP44G	FFP75G	FGP20G	FGP30G	FGP44G	FGP60G	FGP85G	FGP110G	FGP150G	
Applicable Drive		L7□B010□		L7□B020□		L7□B035□	L7□B050□	L7□B075□		L7□B020□	L7□B035□	L7□B050□	L7□B075□	L7□B150□			
Flange Size (□)		□130				□180				□220							
Rated Output	[kW]	0.45	0.85	1.3	1.7	1.8	2.9	4.4	6	7.5	1.8	2.9	4.4	6	8.5	11	15
Rated Torque	[N · m]	2.86	5.41	8.28	10.82	11.46	18.46	28.01	38.2	47.75	11.46	18.46	28.01	38.2	54.11	70.03	95.49
	[kgf · cm]	29.23	55.22	84.45	110.43	116.93	188.39	285.83	389.77	487.21	116.93	188.39	285.83	389.77	552.17	714.57	974.42
Max. Instantaneous	[N · m]	8.59	16.23	24.83	32.47	34.38	55.39	84.03	95.49	119.37	34.38	55.39	84.03	95.49	135.28	175.07	238.73
	[kgf · cm]	87.7	166.65	253.35	331.3	350.79	565.16	857.49	974.42	1,218.02	350.79	565.16	857.49	974.42	1,380.43	1,786.43	2,436.05
Rated Current	[A]	3.28	3.50	5.39	7.01	7.56	10.14	15.68	20.23	20.01	7.76	9.65	17.11	20.38	28.24	28.28	35.71
Max. Current	[																

Motor Specifications [Rated 1000r/min]

Servo Motor [XML-□□□□]		FEP03M	FEP06M	FEP09M	FEP12M	FFP12M	FFP20M	FFP30M	FFP44M	FGP12M	FGP20M	FGP30M	FGP44M
Applicable Drive		L7□B010□				L7□B020□		L7□B050□		L7□B020□		L7□B050□	
Flange Size[□]		□130				□180				□220			
Rated Output	[kW]	0.3	0.6	0.9	1.2	1.2	2	3	4.4	1.2	2	3	4.4
Rated Torque	[N · m]	2.86	5.73	8.59	11.46	11.46	19.1	28.65	42.02	11.46	19.1	28.65	42.02
	[kgf · cm]	29.23	58.47	87.7	116.93	116.93	194.88	292.33	428.74	116.93	194.88	292.33	428.74
Max. Instantaneous	[N · m]	8.59	17.19	25.78	34.38	34.38	57.3	85.94	126.05	34.38	57.3	85.94	126.05
	[kgf · cm]	87.7	175.4	263.09	350.79	350.79	584.65	876.98	1286.23	350.79	584.65	876.98	1,071.86
Rated Current	[A]	3.28	3.28	3.33	4.87	4.83	7.94	11.9	16.69	4.75	7.88	11.74	17.39
Max. Current	[A]	9.83	9.83	9.99	14.6	14.5	23.83	35.7	50.08	14.24	23.64	35.22	52.18
Rated Speed	[r/min]	1000											
Max. Speed	[r/min]	2000				1700							

FAL Series


Plug Specifications



Power

Pin No.	Color	Signal
1	Red	U
2	White	V
3	Black	W
4	Green	Ground


(Power Connector Pin Table)



Brake

Pin No.	Signal
1	BK+
2	BK-


(Brake Connector Pin Table)



Encoder


Multi Turn (M)	
Pin No.	Signal
1	MA
2	SLO
3	-
4	OV
5	SHIELD
6	MA
7	SLO
8	-
9	+5V

(Encoder Connector Pin Table)

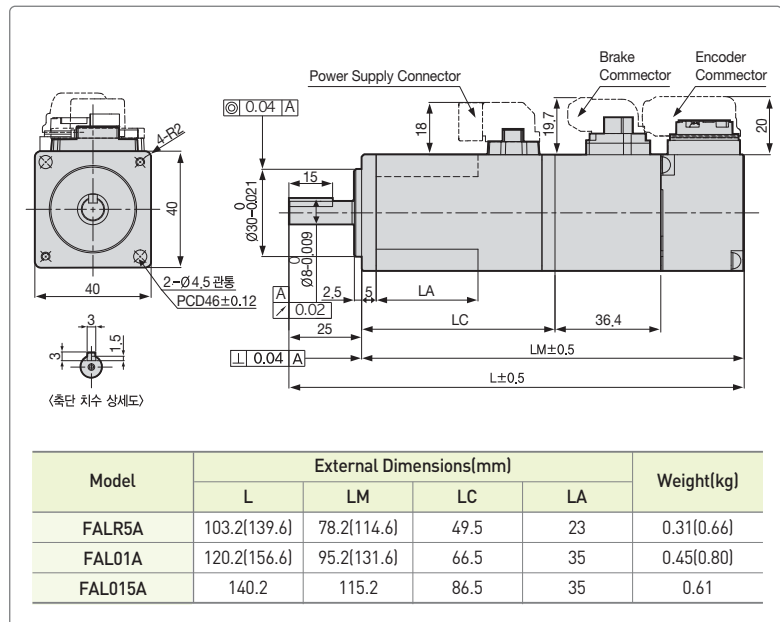

FC Series


Plug Specifications



Power

Pin No.	Color	Signal
1	Black	W
2	White	V
3	Red	U
4	Green	Ground

(Power Connector Pin Table)



Brake

Pin No.	Signal
1	BK+
2	BK-


(Brake Connector Pin Table)



Encoder


Single Turn (N)		Multi Turn (M)	
Pin No.	Signal	Pin No.	Signal
1	MA	1	MA
2	SLO	2	SLO
3	-	3	GND_B
4	OV	4	OV
5	SHIELD	5	SHIELD
6	MA	6	MA
7	SLO	7	SLO
8	-	8	VDD_B
9	+5V	9	+5V

(Encoder Connector Pin Table)

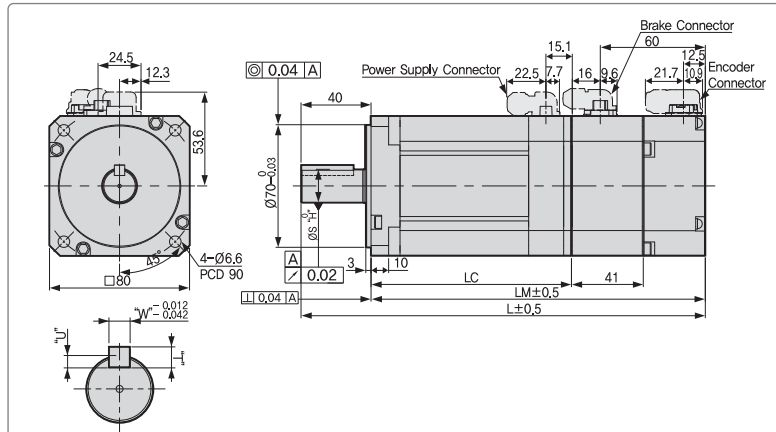


FF, FFP Series

Plug Specifications




Spec.: MS3102A22-22P
(Standard)



Spec.: MS3102A24-10P
(Brake-attached type)

2. Serial type



Spec.: MS3102A20-29P

Power

Pin No.	Signal
A	U
B	V
C	W
D	Ground

Pin No.	Signal	Pin No.	Signal
A	U	D	Ground
B	V	E	BK+
C	W	F	BK-

Encoder

Pin No.	Signal	Pin No.	Signal
A	MA	M	-
B	MA	N	-
C	SLO	P	-
D	SLO	R	-
E	-	H	+5V
F	-	G	0V
K	-	J	SHIELD
L	-		

(Single Turn Encoder Connector Pin Table)

Pin No.	Signal	Pin No.	Signal
A	MA	M	-
B	MA	N	-
C	SLO	P	

DD Motor Designation



MDM

-

D

D

None

34

D

NO

H

Motor Type

D : DD MOTOR

Input Power Supply

None : 220VAC

External Diameter

B : 135mm

C : 175mm

D : 230mm

E : 290mm

F : 360mm

Rated Troque

03 : 3Nm Output

06 : 6Nm Output

09 : 9Nm Output

...

60 : 60Nm Output

...

A6 : 160Nm Output

Rated Speed

A : 300rpm

D : 200rpm

G : 150rpm

M : 100rpm

Encoder Type

135	175	230	290	360	Remark
NO					Single Turn Abs, Biss communication
20Bit					

Shape of Shaft End

H : Hollow Type

Servo Motor

Using the own technologies to produce motors, drives and encoders domestically

Optimized for low-speed, high-torque and high-precision operation

- Providing Power connection for the connection of DC-Link Terminal
- Compact Size and Easy Wiring (Compared with 3 phase AC Reactor)
- Providing Connection for DC Input (PI, N)

Reduced cogging torque and optimized torque design

- Optimal ratio of the permanent magnet and coil / slot selected through electromagnetic analysis
- Using multiple permanent magnets to reduce torque ripple and to maximize torque
- Using a permanent magnet of high-energy rare earth elements (Nd-Fe-B)

Using the high-performance rotary optical encoder that adopts the Biss protocol

- Resolution of 1,048,576 CPR (Single turn Absolute)
- Using our own encoder technology to reduce the cost and shorten the delivery time

Compatible with our L7 Series AC Servo Drive (3phase AC 220V)

- Both standard I/O type (serial communication supported) and network type (EtherCAT) applicable

Direct Drive Structure

- No backlash impact
- High-precision operation and shortened installation time
- Smooth rotary motion
- Reduced noise

Hollow type that is efficient for wiring and piping

A wide range of products

- Rated output: 63W-.25kW
- Rated torque: 3.0N.m-160N.m (the instantaneous maximum torque should be 3 times the rated torque)
- Rated speed: 150RPM-200RPM
- Frame diameter: 135mm,175mm,230mm,290mm, and 360mm (13 models)



DD Motor Specifications

Ratings and Specifications

- Insulation class : Class B
- Protection class: IP 40
- Cooling type : Fully enclosed self-cooling
- Vibration class : V15
- Insulation resistance : 500 VDC, 10[M Ω] or higher
- Insulation internal voltage: 1800 VAC, 1 second
- Operating voltage: 200 VAC
- Operating temperature : 0 - 40[°C] / Storage temperature: -10~60[°C]
- Ambient humidity : 20 - 80% RH (no condensation)
- Installation location : Place with no toxic substances, such as corrosive and combustible gasses, cutting oil, metal dust, grease or direct sunlight

Line-up Table

Maximum Torque[Nm]			9	18	27	36	54	66	102	120	180	330	480
Rated speed 200[rpm]	Maximum speed 500[rpm]	Ø135	DB03D DB06D DB09D 										
		Ø175		DC06D		DC12D							
		Ø230				DD12D							
	Maximum speed 400[rpm]	Ø175					DC18D						
		Ø230					DD22D DD34D				</		


Applicable Drive to Motor

Rated Speed (RPM)	Maximum Speed (RPM)	External Diameter of Motor(Ø)	Applicable Motor	Applicable Drive	Standard Encoders	Encoders Cable (Serial)	Power Cable (Power)
200	500	135	DB03D	L7PA001U	* 20Bit Serial	XLCS-E □ □ □ ZS	XLCS-PN □ □ □ YS
			DB06D	L7PA001U			
			DB09D	L7PA001U			
	400	175	DC06D	L7PA002U			
			DC12D	L7PA002U			
			DC18D	L7PA002U			
	500	230	DD12D	L7PA004U			
			DD22D	L7PA004U			
			DD34D	L7PA008U			
	300						


Motor Designation		MDM-DB□□D□□H			MDM-DC□□D□□H		
		03	06	09	06	12	18
Applicable Drive		L7□A001□	L7□A002□	L7□A004□	L7□A002□	L7□A004□	L7□A008□
Flange Size	mm	Ø135			Ø175		
Rated Output	W	63	126	188	126	251	377
Rated Torque	N·m	3	6	9	6	12	18
Max Torque	N·m	9	18	27	18	36	54
Rated Current	Arms	1.12	1.46	2.63	1.48	2.41	3.0
Max Current	Arms	3.36	4.38	7.89			

Motor Designation		MDM-DD□□D□□H			MDM-DE□□D□□H		MDM-DF□□G□□H	
		12	22	34	40	60	A1	A6
Applicable Drive		L7□A004□	L7□A008□	L7□A010□	L7□A010□	L7□A020□	L7□A020□	L7□A035□
Flange Size	mm	Ø230			Ø290		Ø360	
Rated Output	W	251	461	712	838	1,257	1,728	2,513
Rated Torque	N-m	12	22	34	40	60	110	160
Max Torque	N-m	36	66	102	120	180	330	480
Rated Current	Arms	2.58</						



MDM-DB03D, MDM-DB06D, MDM-DB09D


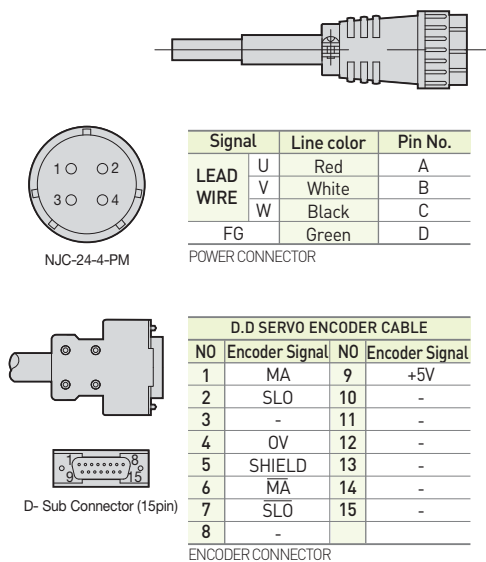


MDM-DD12D, MDM-DD22D, MDM-DD34D

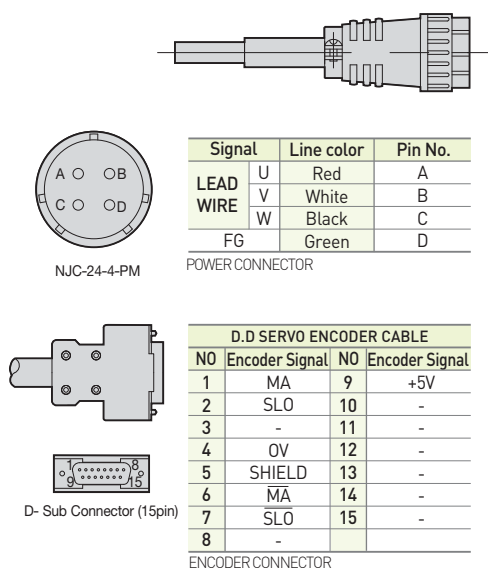

MDM-DFA1G, MDM-DFA6G

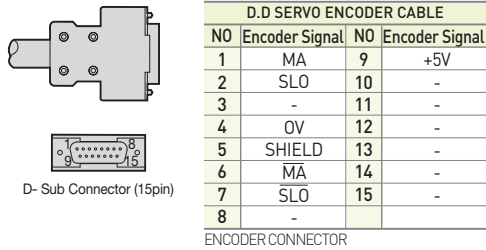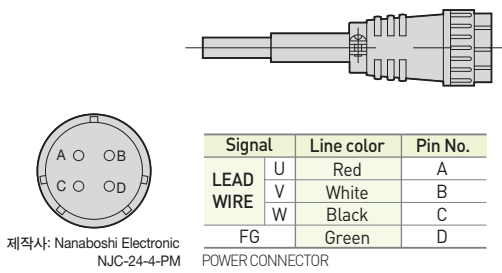




Options and Accessories

Contents

Signal cable	102
Power cable	106
DD Motor Signal cable	113
Other options [Signal cable]	114

Signal Cable [Incremental]

Type	Product Type	Model Name ^{Note1)}	Applicable Drive	Applicable Motor	Specifications		
For Signal	Parallel Encoder Cable (Small Capacity)	XLCS-E□□□AS	XDL-L7SA□□□A L7NHA□□□U L7PA□□□U	All Models of XML-SA SB SC HB SERIES	 <table border="1"> <thead> <tr> <th>PIN No.</th><th>Encoder Signal</th></tr></thead></table>	PIN No.	Encoder Signal
PIN No.	Encoder Signal						

Signal Cable [Serial]

Type	Product Type	Model Name ^(Note1)	Applicable Drive	Applicable Motor	Specifications
For Signal	S Series Motor S-turn Encoder Cable (Small Capacity)	XLCS-E□□□CS	XDL-L7S□□□B L7NA□□□B L7NH□□□□U L7PA□□		

